SIEMENS

Data sheet



RONIS key-operated switch, 22 mm, round, metal, shiny, lock number SB30, with 2 keys, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h, key removal I, possible special locks: SB31, 421, 455, Z=50-unit packaging

product brand name	SIRIUS ACT	
product designation	Key-operated switches	
design of the product	Actuating/signaling element	
product type designation	3SU1	
product line	Metal, shiny, 22 mm	
manufacturer's article number of included key	3SU1950-0FB80-0AA0	
Actuator		
principle of operation of the actuating element	latching, 90° (10:30 h/13:30 h)	
product extension optional light source	No	
color		
 of the actuating element 	silver	
material of the actuating element	metal	
shape of the actuating element	Key	
outer diameter of the actuating element	29.5 mm	
number of switching positions	2	
switch position for key distraction	I	
actuating angle		
• clockwise	90°	
lock make	RONIS	
key number	SB30	
Front ring		
product component front ring	Yes	
design of the front ring	Standard	
material of the front ring	Metal, high gloss	
color of the front ring	silver	
General technical data		
protection class IP	IP66, IP67, IP69(IP69K)	
of the terminal	IP20	
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13	
shock resistance		
according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms	
vibration resistance		
• according to IEC 60068-2-6	10 500 Hz: 5g	
operating frequency maximum	1 800 1/h	
mechanical service life (operating cycles) typical	300 000	
reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Ambient conditions		
ambient temperature		
during operation	-25 +70 °C	

during storage	-40 +80 °C	
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)	
Installation/ mounting/ dimensions		
height	29.5 mm	
width	29.5 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	49.4 mm	
installation width	29.5 mm	
installation depth	25.4 mm	
Certificates/ approvals		
Further information		

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1050-4BF21-0AA0-Z X90


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1050-4BF21-0AA0-Z X90

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1050-4BF21-0AA0-Z X90

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1050-4BF21-0AA0-Z X90&lang=en



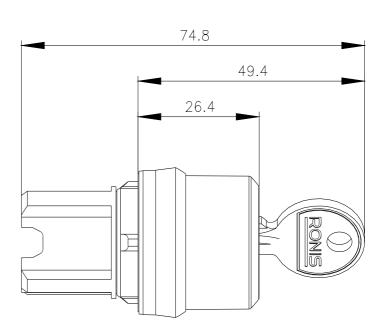

1/26/2022 last modified: