SIEMENS

Data sheet

3RT2536-1AP00



power contactor, AC-3, 51 A, 22 kW / 400 V, 4-pole, 230 V AC, 50 Hz, main contacts: 2 NO + 2 NC, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2

28 A			
product brand name	SIRIUS		
product designation	contactor		
product type designation	3RT25		
General technical data			
size of contactor	S2		
product extension			
 function module for communication 	No		
auxiliary switch	Yes		
insulation voltage			
 of main circuit with degree of pollution 3 rated value 	690 V		
 of auxiliary circuit with degree of pollution 3 rated value 	690 V		
surge voltage resistance			
 of main circuit rated value 	6 KV		
 of auxiliary circuit rated value 	6 kV		
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V		
shock resistance at rectangular impulse			
• at AC	11.8g / 5 ms, 7.4g / 10 ms		
shock resistance with sine pulse			
• at AC	18.5g / 5 ms, 11.6g / 10 ms		
mechanical service life (operating cycles)			
 of contactor typical 	10 000 000		
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000		
 of the contactor with added auxiliary switch block typical 	10 000 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2014		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-40 +70 °C		
during storage	-55 +80 °C		
relative humidity minimum	10 %		
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %		
Main circuit			
number of poles for main current circuit	4		
number of NO contacts for main contacts	2		
number of NC contacts for main contacts	2		
operational current			
• at AC-1 up to 690 V			

- at ambient temperature 40 °C rated value	70 A			
— at ambient temperature 40°C rated value — at ambient temperature 60 °C rated value	60 A			
 at ambient temperature of C fated value at AC-2 at AC-3 at 400 V 				
— per NO contact rated value	41 A			
— per NC contact rated value	41 A			
minimum cross-section in main circuit at maximum AC-1 rated	25 mm ²			
value				
operational current				
at 1 current path at DC-1				
— at 24 V rated value	60 A			
— at 110 V rated value	4.5 A			
— at 220 V rated value	1A			
— at 440 V rated value	0.4 A			
with 2 current paths in series at DC-1	55 A			
- at 24 V rated value	55 A 45 A			
— at 110 V rated value — at 220 V rated value	45 A 5 A			
— at 440 V rated value	5 A 1 A			
• at 1 current path at DC-3 at DC-5				
- at 24 V per NC contact rated value	35 A			
- at 24 V per NO contact rated value	35 A			
— at 110 V per NC contact rated value	1.25 A			
— at 110 V per NO contact rated value	2.5 A			
— at 220 V per NC contact rated value	0.5 A			
— at 220 V per NO contact rated value	1 A			
— at 440 V per NC contact rated value	0.045 A			
— at 440 V per NO contact rated value	0.1 A			
• with 2 current paths in series at DC-3 at DC-5				
— at 24 V per NC contact rated value	55 A			
— at 24 V per NO contact rated value	55 A			
— at 110 V per NC contact rated value	12.5 A			
— at 110 V per NO contact rated value	25 A			
— at 220 V per NC contact rated value	2.5 A			
— at 220 V per NO contact rated value	5 A			
— at 440 V per NC contact rated value	0.135 A			
— at 440 V per NO contact rated value	0.27 A			
operating power at AC-2 at AC-3				
at 230 V per NC contact rated value	15 kW			
at 230 V per NO contact rated value	15 kW			
at 400 V per NC contact rated value	22 kW			
at 400 V per NO contact rated value	22 kW			
short-time withstand current in cold operating state up to 40 °C				
 limited to 1 s switching at zero current maximum 	546 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 5 s switching at zero current maximum 	443 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 10 s switching at zero current maximum 	334 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 30 s switching at zero current maximum 	241 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 60 s switching at zero current maximum 	196 A; Use minimum cross-section acc. to AC-1 rated value			
power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor	4 W			
no-load switching frequency				
• at AC	5 000 1/h			
operating frequency				
• at AC-1 maximum	1 000 1/h			
ontrol circuit/ Control				
type of voltage of the control supply voltage	AC			
control supply voltage at AC				
• at 50 Hz rated value	230 V			
operating range factor control supply voltage rated value of magnet coil at AC				
● at 50 Hz	0.8 1.1			
apparent pick-up power of magnet coil at AC	190 VA			

e at 50 Hz	190 VA			
• at 50 Hz	190 VA 0.72			
inductive power factor with closing power of the coil • at 50 Hz				
apparent holding power of magnet coil at AC	0.72 16 VA			
apparent holding power of magnet coll at AC • at 50 Hz	16 VA 16 VA			
inductive power factor with the holding power of the coil	16 VA 0.37			
at 50 Hz	0.37			
closing delay				
• at AC	10 80 ms			
opening delay				
• at AC	10 18 ms			
arcing time	10 20 ms			
control version of the switch operating mechanism	AC			
Auxiliary circuit				
number of NC contacts for auxiliary contacts instantaneous contact	1			
number of NO contacts for auxiliary contacts instantaneous contact	1			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
• at 230 V rated value	6 A			
• at 400 V rated value	3 A			
• at 500 V rated value	2 A			
at 690 V rated value	1 A			
operational current at DC-12				
at 24 V rated value	10 A			
at 48 V rated value	6 A			
at 60 V rated value	6 A 3 A			
 at 110 V rated value at 125 V rated value 	3 A 2 A			
at 125 V rated value at 220 V rated value	1A			
at 220 V rated value at 600 V rated value	0.15 A			
operational current at DC-13				
at 24 V rated value	10 A			
at 48 V rated value	2 A			
at 60 V rated value	2 A			
• at 110 V rated value	1 A			
• at 125 V rated value	0.9 A			
• at 220 V rated value	0.3 A			
• at 600 V rated value	0.1 A			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
yielded mechanical performance [hp]				
 for 3-phase AC motor at 460/480 V rated value 	25 hp			
contact rating of auxiliary contacts according to UL	A600 / P600			
Short-circuit protection				
design of the fuse link				
 for short-circuit protection of the main circuit 				
— with type of coordination 1 required	gG: 160 A (690 V, 100 kA)			
— with type of assignment 2 required	gG: 80 A (690 V, 100 kA)			
• for short-circuit protection of the auxiliary switch required	fuse gG: 10 A			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022			
side-by-side mounting	Yes			
height	114 mm			
width	75 mm			
depth	130 mm			
required spacing				
 with side-by-side mounting 				

			-				
— forwards		0 mm					
— backwards	8		0 mm				
— upwards			0 mm				
	— downwards			0 mm			
— at the side			0 mm				
 for grounded particular 	arts		0				
— forwards				0 mm			
— backwards	5		0 mm				
— upwards			50 mm				
— at the side			10 mm				
	— downwards			50 mm			
•	for live parts						
— forwards			0 mm				
— backwards	5		0 mm				
— upwards			50 mm				
— downward				50 mm			
— at the side			10 mm				
Connections/ Termina							
type of electrical con							
for main current			screw-type t				
 for auxiliary and 			screw-type t				
	 at contactor for auxiliary contacts 		Screw-type terminals				
of magnet coil			Screw-type	terminals			
	onductor cross-sections for	main contacts					
• solid				mm²), 1x (1 50			
 solid or strande 				mm²), 1x (1 50			
	with core end processing		2x (1 25 r	mm²), 1x (1 35	mm²)		
	conductor cross-sections						
 for auxiliary con 	itacts						
— solid		2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)					
— solid or stranded		2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)					
— finely stranded with core end processing		2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)					
for AWG cables for auxiliary contacts		2x (20 16), 2x (18 14)					
AWG number as coded connectable conductor cross section for main contacts		18 1					
Safety related data							
product function							
•	ccording to IEC 60947-4-1		Yes				
	 mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 		No				
. ,	protection class IP on the front according to IEC 60529		IP20				
-	the front according to IEC		finger-safe, for vertical contact from the front				
Certificates/ approvals			iniger eare,				
General Product Ap							
General Froduct Ap	provar						
	Confirmation	\frown		\frown	<u>KC</u>		
(SĐ		())		(UL)		EHE	
		S				LIIL	
C24		ccc		UL.			
	Functional						
EMC	Safety/Safety of Ma-	Declaration of	Conformity		Test Certificates		
	chinery						
•	Type Examination Cer-				Special Test Certific-	Type Test Certific-	
kλ	<u>tificate</u>	()		UK CA	<u>ate</u>	ates/Test Report	
Ś		して					
RCM		EG-Konf.		СН			
Marine / Shipping							



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2536-1AP00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2536-1AP00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2536-1AP00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2536-1AP00&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


 $\underline{https://support.industry.siemens.com/cs/ww/en/ps/3RT2536-1AP00/char}$


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2536-1AP00&objecttype=14&gridview=view1



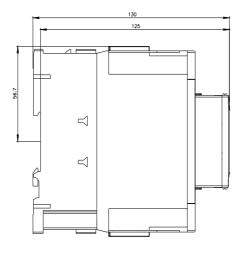



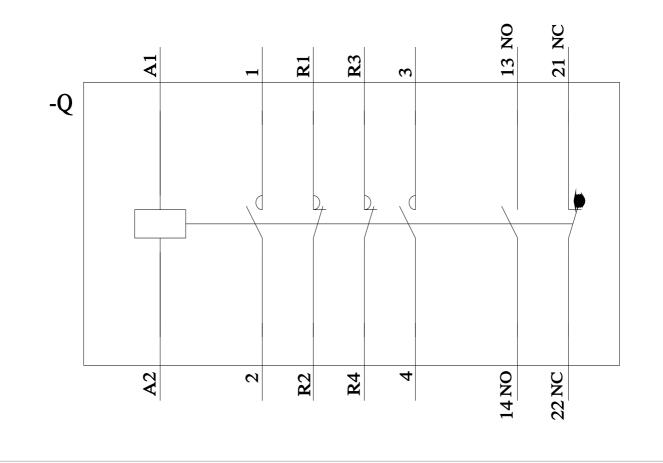

last modified:

11/21/2022 🖸