

Kilovac | Kilovac LEV200 TE Internal #: 5-1618387-7 DC Contactors, Contact Arrangement 1 Form X, SPST-NO DM, 22 AWG Wire Size, .34 mm² Wire Size, 500A Contact Current Rating, Kilovac LEV200

View on TE.com >

Relays & Contactors > Contactors > Mil-Aero Contactors > DC Contactors



Contact Arrangement: 1 Form X, SPST-NO DM

Wire Size: .34 mm²

Contact Current Rating: 500 A

Coil Resistance: 145 Ω

Features

Configuration Features

Auxiliary Switch Contact Arrangement	None
Contact Arrangement	1 Form X, SPST-NO DM
Number of Poles	1



Electrical Characteristics

Contact Current Rating	500 A
Coil Resistance	145 Ω
Coil Voltage Rating	48 VDC
Contact Switching Voltage (Max)	900 VDC
Body Features	
Enclosure Type	Sealed
Termination Features	
Mains Termination & Connection Type	M8 x 1.25
Coil Termination & Connection Type	10-32 Stud
Mechanical Attachment	
Torque (Main)	80 - 100 in-Ibs
Torque (Coil)	15 - 30 in-lbs
Product Mount Type	Chassis
Dimensions	

C For support call +1 800 522 6752

5-1618387-7

DC Contactors, Contact Arrangement 1 Form X, SPST-NO DM, 22 AWG Wire Size, . 34 mm² Wire Size, 500A Contact Current Rating, Kilovac LEV200



Wire Size	.34 mm ²
Operation/Application	
Actuating System	DC
Packaging Features	
Packaging Method	Individual
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Canability	Hand solderable with lead free solder

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

5-1618387-7

DC Contactors, Contact Arrangement 1 Form X, SPST-NO DM, 22 AWG Wire Size, . 34 mm² Wire Size, 500A Contact Current Rating, Kilovac LEV200






Also in the Series | Kilovac LEV200



Customers Also Bought

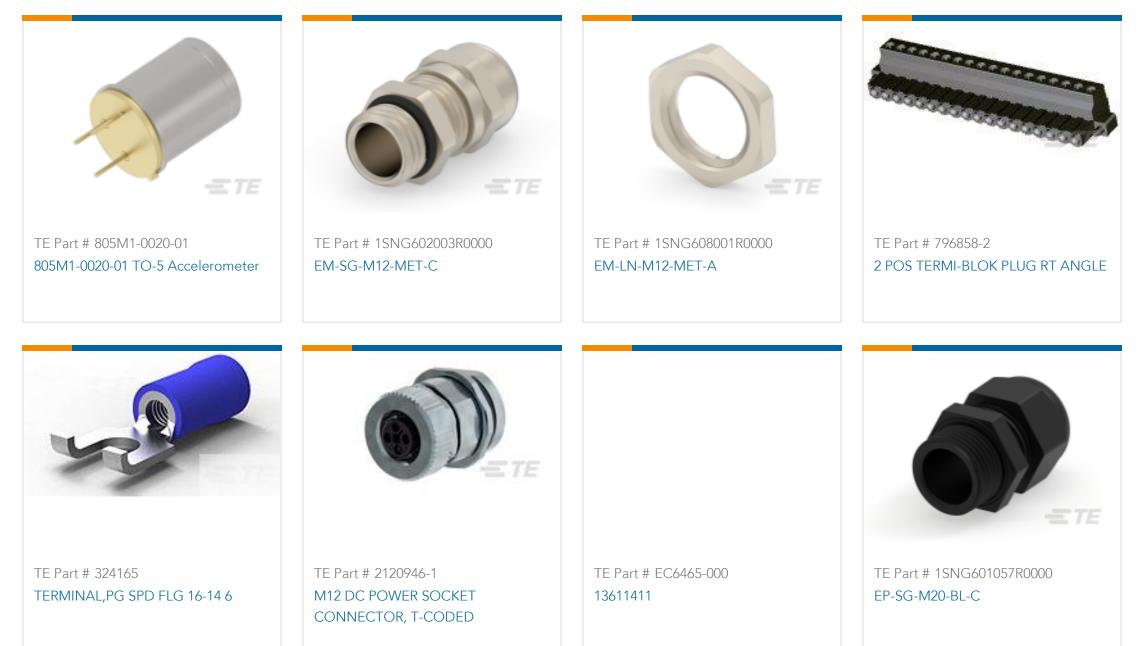



5-1618387-7

DC Contactors, Contact Arrangement 1 Form X, SPST-NO DM, 22 AWG Wire Size, . 34 mm² Wire Size, 500A Contact Current Rating, Kilovac LEV200



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1618387-7_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1618387-7_E.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_5-1618387-7_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages 5-1773450-5_sec7_LEV200

English