

Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical specification

Input specifications


Digital input

No of inputs	4
Input type	PNP
Input voltage	10-30V DC
Input current	5.5mA @ 24V
Debounce time	10ms
Maximum counting Frequency	Standard DI Mode -50Hz
Isolation between inputs	2.5KV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

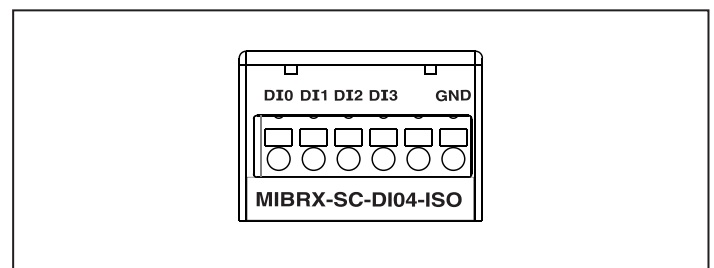

Ordering information

Product code	Description	Certification
MIBRX-SC-DI04-ISO	MiBRX Slot Card - 4 Digital Inputs (Isolated)	CE RoHS