

### Features

- ◆ Plug-in module
- ◆ Easy to connect and replace in all MiBRX base modules
- ◆ Configured via Selpro software
- ◆ Spring fit terminals

### Technical Specification


#### Input specifications

Digital input	
No of inputs	6
Input type	NPN / PNP (Jumper Selectable)
Input voltage range	0-30V
Response time	Depends On debounce time & ladder execution time
Debounce time	10ms ( User selectable from software)

#### General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

#### Terminal connection

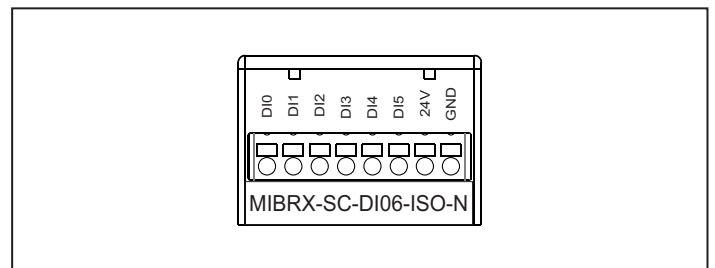

### Ordering information

Product code	Description	Certification
<b>MIBRX-SC-DI06-ISO-N</b>	6-Digital isolated input card NPN / PNP	CE