





## Quartz Crystal


SMD-version

part no.	12.61014
model	KX – 3T
frequency	32.0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance -40° ~ +85°C	±30 ppm
load capacitance $C_L$	6 pF
series resistance R1 (ESR) max.	150 Ohm
aging at +25°C (first year) max.	±3 ppm
shunt capacitance $C_0$	0.39 pF typ., 0.6 pF max.
drive level max.	100 $\mu$ W
contents of reel	1000 pcs.


Dimensions (mm) :



Suggested soldering pad:



Reflow soldering condition:

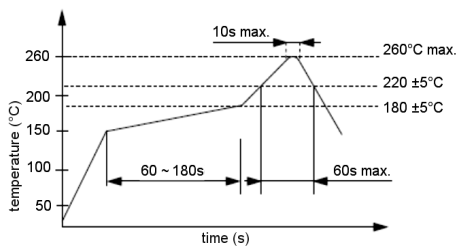

Tape specification:

