



Features
<ul style="list-style-type: none"> ±10ppm Tolerance Available Ultra-Miniature Package High Reliability for Automotive Wide Temperature Range Available AEC-Q200 Compliant

Applications
<ul style="list-style-type: none"> Automotive Electronics Infotainment System Car Navigation ECU Sub Clock



Part Numbering Guide

SAW 31 2 12 D 4A - 32.768K

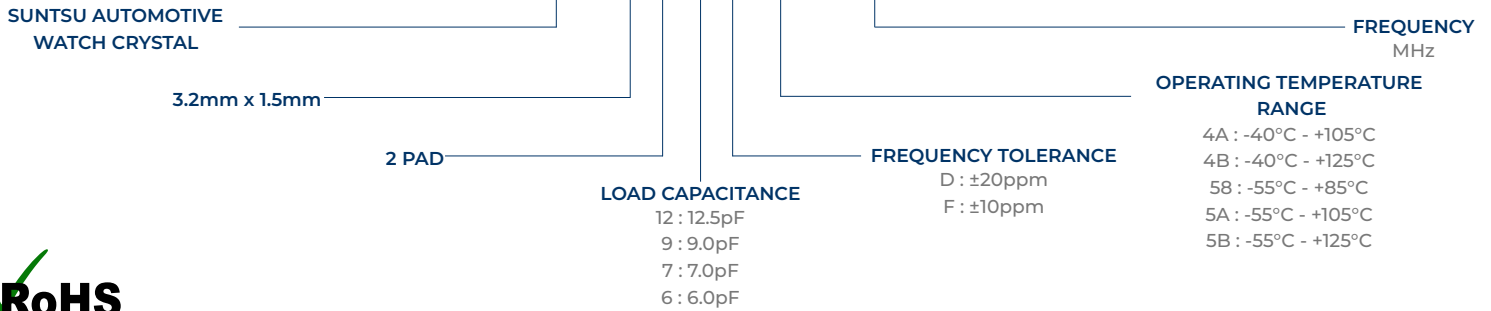


Cage Code: 4GUT4

To customize your parameters contact a Suntsu representative.

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	KHz		32.768		
Frequency Tolerance at +25°C	ppm	-20		20	See part numbering guide for options.
Frequency Stability vs. Aging	ppm	-3		3	First year @ 25°C
Frequency Coefficient (β)	ppm/T ²	-0.040	-0.030	-0.020	
Operating Temperature	°C	-55		125	See part numbering guide for options.
Turnover Temperature	°C	20	25	30	
Storage Temperature	°C	-55		125	
Load Capacitance	pF	6		12.5	See part numbering guide for options.
Shunt Capacitance	pF		1.0		
Drive Level	μW		0.1	1.0	
Insulation Resistance	MΩ	500			@ 100VDC ± 15V.
Equivalent Series Resistance	kΩ			70	


Outline Drawing & Recommended Landed Pattern

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

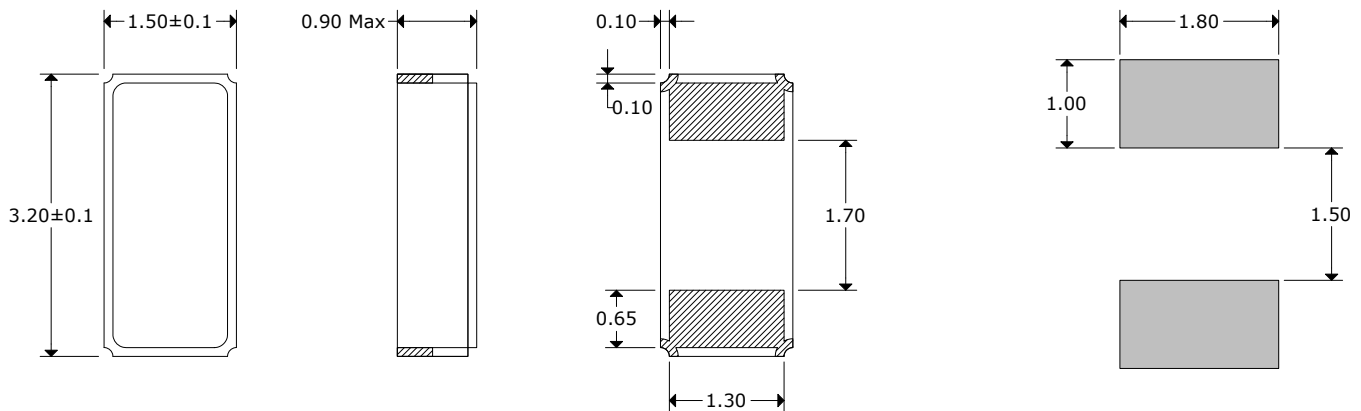

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Moisture Resistance	MIL-STD-883, Method 1004	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Solderability	MIL-STD-883, Method 2003

Reflow Profile & Part Marking

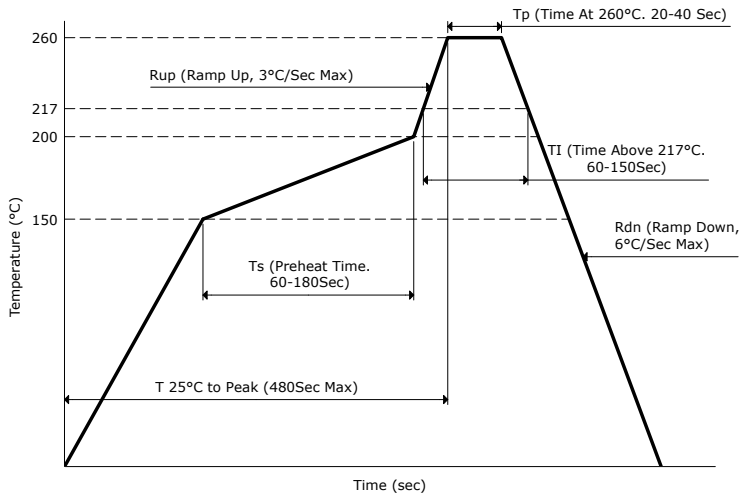

Line 1 : TXX X Y WW

Manufacturing Identifier → TXX
 Load Capacitance → X
 Week → Y
 Year → WW

A : 6pF
 B : 7pF
 J : 9pF
 F : 12.5pF

Tape And Reel Dimensions

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

3,000pcs / Reel

