


RoHS COMPLIANT

REV	DATE
B	05/20/'21
C	06/18/'21

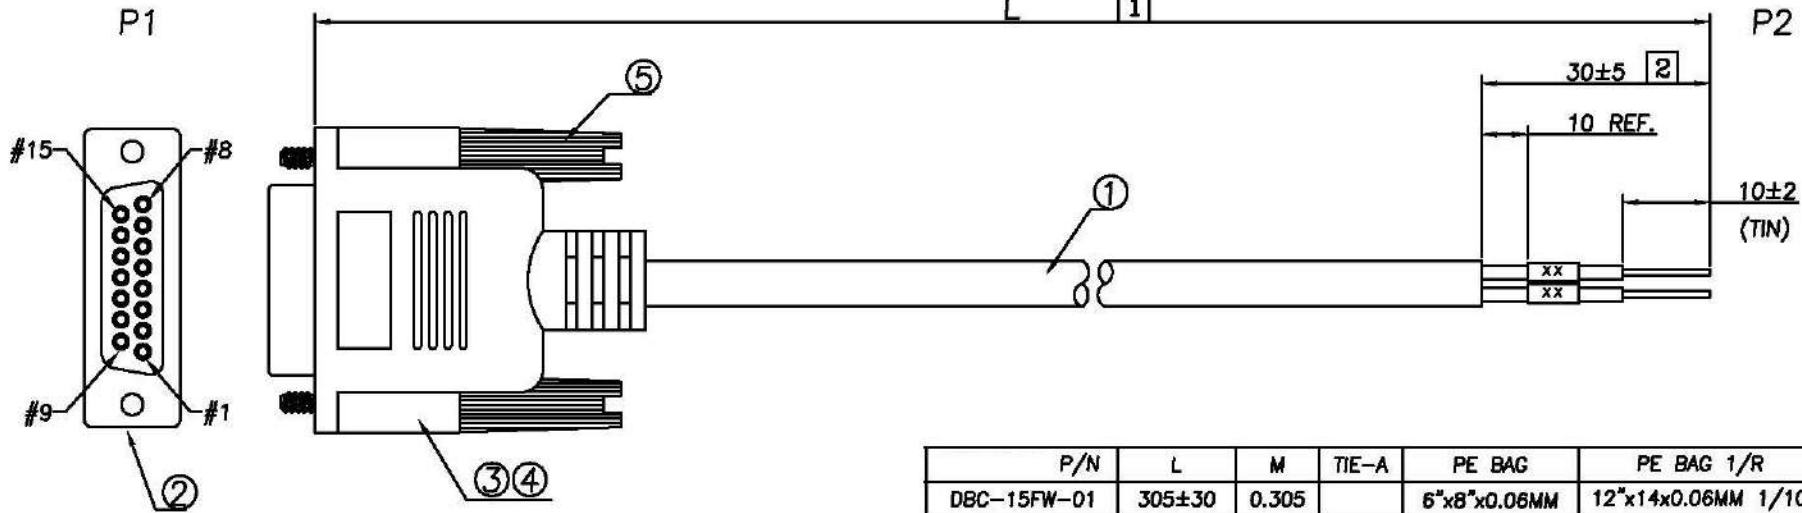


P/N	L	M	TIE-A	PE BAG	PE BAG 1/R	Q'TY
DBC-15FW-01	305±30	0.305		6"x8"x0.06MM	12"x14"x0.06MM 1/10	A/R
DBC-15FW-05	1525±50	1.525	100x2	6"x8"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15FW-10	3050±50	3.05	120x2	7"x10"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15FW-25	7625±50	7.625		8"x10"x0.06MM	16"x18"x0.06MM 1/5	A/R

PIN ASSIGNMENT

P1	P2	P1	P2
1 BLACK	P1	11 PINK	P11
2 BROWN	P2	12 LIGHT GREEN	P12
3 RED	P3	13 BLACK/WHITE	P13
4 ORANGE	P4	14 BROWN/WHITE	P14
5 YELLOW	P5	15 RED/WHITE	P15
6 GREEN	P6	S DRAIN CUT	
7 BLUE	P7		
8 PURPLE	P8		
9 GRAY	P9		
10 WHITE	P10		

* LABEL: Prop 65 WARNING, 40*15MM	1	PCS	
* PE BAG: L"xW"x0.06MM	A/R	PCS	
* HT-TUBE OD:1.5MM, WHITE 15MM	15	PCS	
* TIE-A BLACK	XX*2	MM	
* CARTON: 46x30x25CM	A/R	PCS	
* PE BAG: 30"x28"x0.06MM	A/R	PCS	
* PE BAG: L"xW"x0.06MM	1	PCS	
5 SCREW #4-40/BLACK	2	PCS	
4 PVC BLACK (UL94-V0)	16	G	
3 PVC-IN	4	G	
2 D-SUB 15PIN FEMALE, BLACK	1	PCS	
1 UL2464 28AWG 15C+AD BLACK OD:6.0	L	M	
NO.	DESCRIPTION	QTY	UNIT



MODEL NAME:

DB15S SINGLE CONNECTOR MOLDING CABLE

MARK EXPLAIN:

- Revision Change
- Important Dimension
- Note

TOLERANCE:

0.000:  
0.00 : ±0.50  
0.0 : ±0.50  
0. : ±0.50  
ANGLE: ±3.0'  
UNIT: mm

**COMPUABLEPLUS**  
PROVIDING CONNECTIVITY SOLUTIONS