


P1,P2:	M-Y139C
	M-139C
P3:	M-426E

Customer No: No:

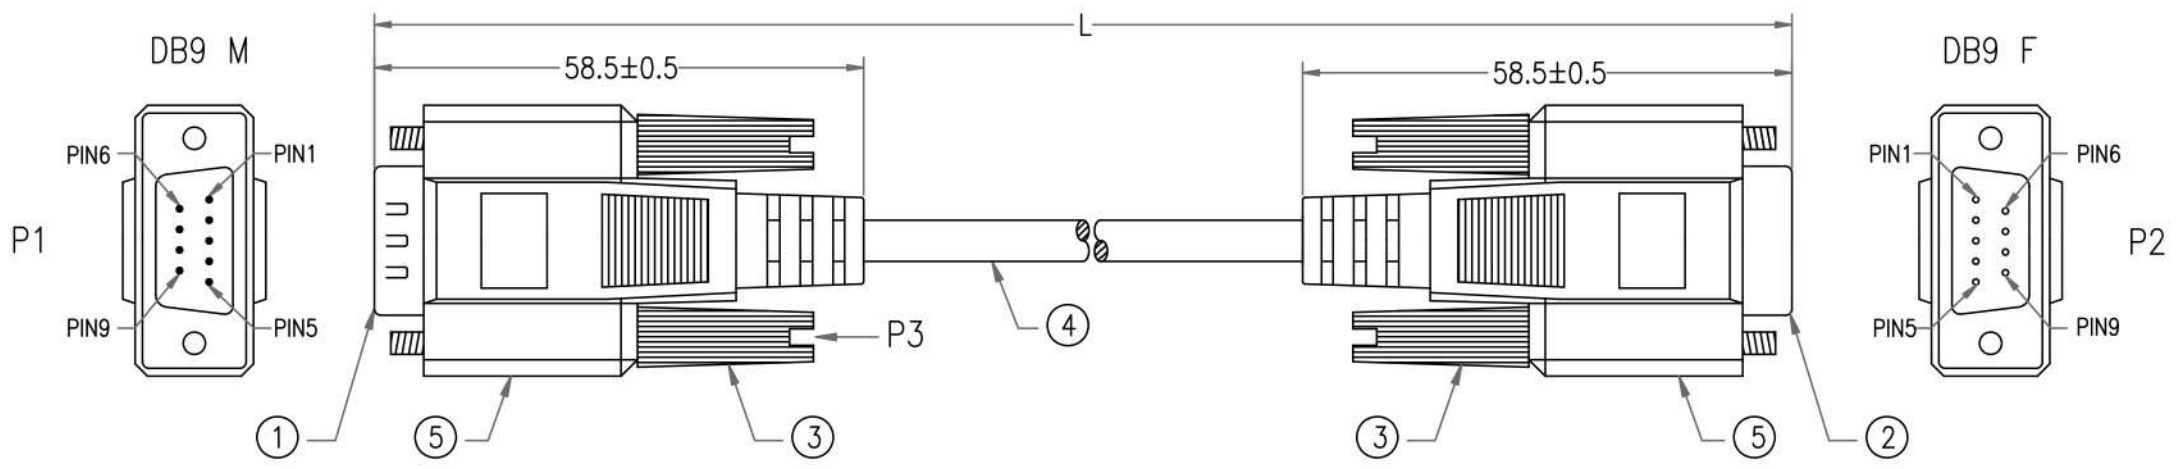

P1	1006	P2	
1	_____	1	BROWN
2	_____	2	RED <sup>△</sup>
3	_____	3	ORANGE
4	_____	4	YELLOW
5	_____	5	GREEN
6	_____	6	BLUE
7	_____	7	PURPLE
8	_____	8	GREY
9	_____	9	BLACK
SHIELD	_____	SHIELD	

\*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION		Q'TY	Supplier
5	BLACK PVC TUBE $\phi$ 3.0*22mm	H7A001-0304K09	2	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	H5BL31-0304B01	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	1	M277
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA12-0277U09	1	M277

APPROVED		<p><b>COMPUCABLE PLUS</b> PROVIDING CONNECTIVITY SOLUTIONS</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	ZHU		
DATE	05/JULY/19	ITEM NO.	DMC-9MF-XXB & DMC-9MF-XXB-MF
		UNIT:mm	

△REV.2 2015.07.13	ADD SPEC	△REV.3 2019.07.05	MODIFY PRODUCT NO
△REV.1 2010.09.21	ADD CONDUCTOR COLOR CODE	CHECKED	