
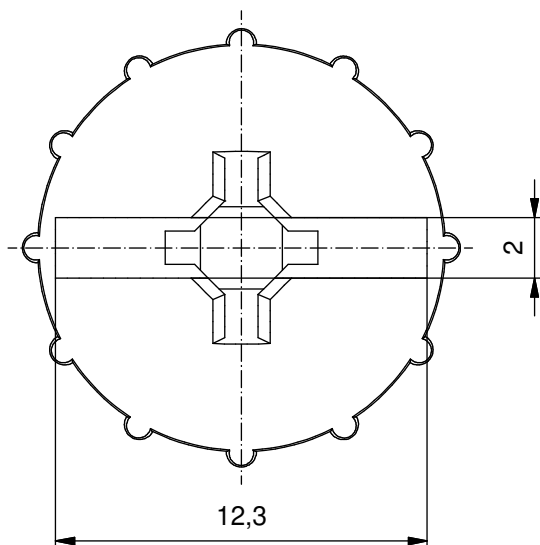


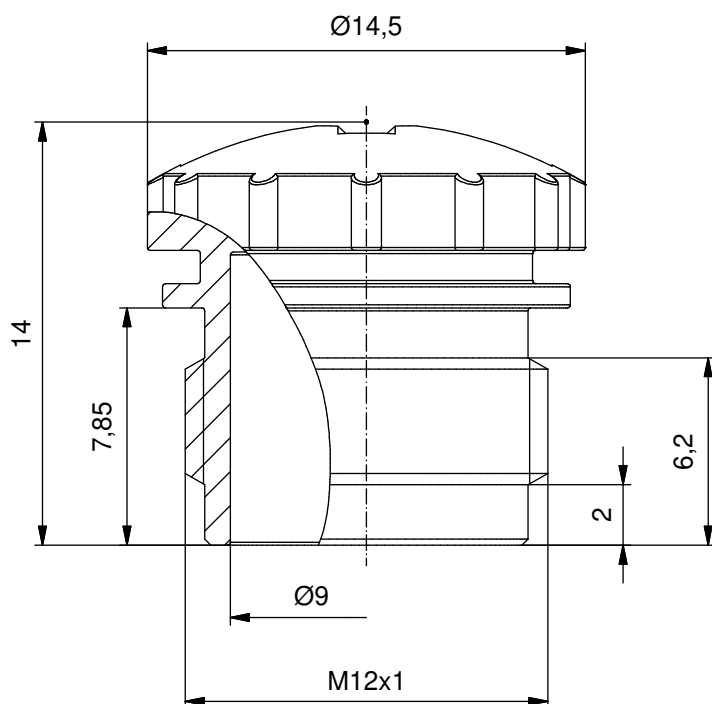

Technical specification/

Technische Daten:

Degree of protection/ Schutzart: IEC 60529	IP 67, in mated condition/ im verschraubten Zustand
Temperature range/ Umgebungstemperatur:	-30 °C ... +105 °C

Materials/


Werkstoffe:

Protecting cap/ Schutzkappe:	PA, UL 94 V-0
---------------------------------	---------------


Installation specification/

Montagedaten:

Recommended torque/ empfohlenes Drehmoment:	0,6 Nm
--	--------

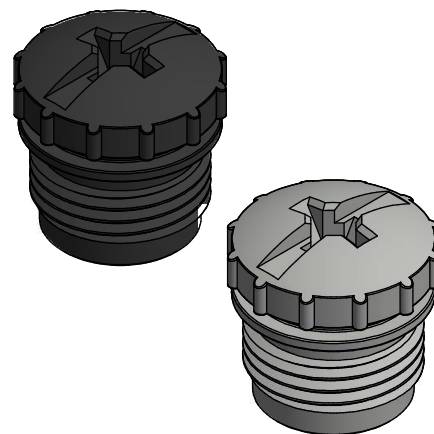

Part no/ Art.-Nr.:	Description/ Beschreibung:	Color/ Farbe:
43-23932	Schutzkappe Kupplung M12x1 Power K / L / M-Cod	black / schwarz
43-24577	Schutzkappe Kupplung M12x1 Power K / L / M-Cod	grey / grau



dim. in mm

general tolerance/ Allgemeintoleranz:	0 ± 0,50 mm 0,0 ± 0,25 mm 0,00 ± 0,10 mm * ± 5 °
--	---

	Date/Datum	Name
drawn/ gez.	15.04.2021	Thiel
appd./ gepr.	15.04.2021	Pfeiffer

Protecting cap female connector
M12x1
Schutzkappe Kupplung M12x1
Power K / L / M-Cod.

Index: a Original

scale/Maßstab:

CONEC®

dwg no /
Z.-nr.: 43K1A5077

DIN-
A4

ROHS compliant, no exemption/
ROHS konform, keine Ausnahme

1 / 1