
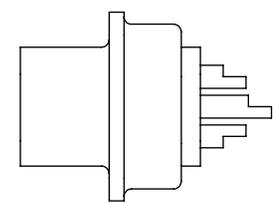
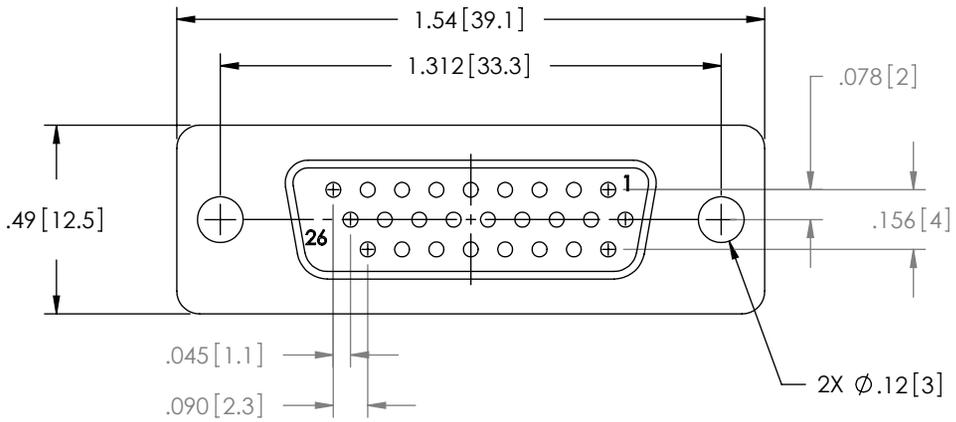


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN99999:REMOVED PACKAGE IN POLYBAG NOTE	11/10/08	D.GRIFFIN

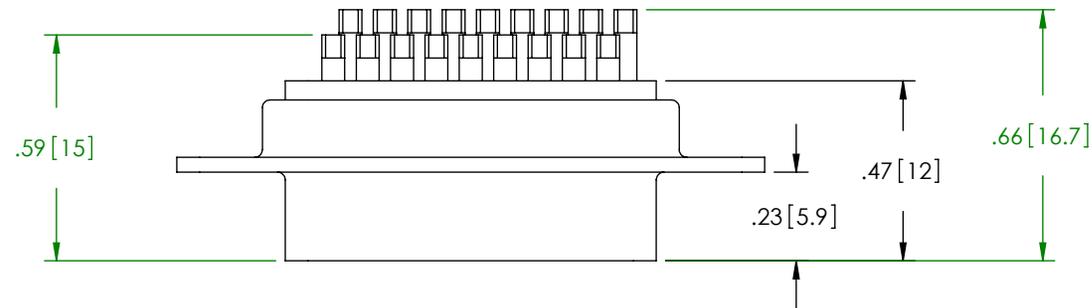

**NOTES:**

**MATERIAL:**  
 CONNECTOR SHELL: STEEL  
 CONTACTS: BRASS  
 CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED

**FINISH:**  
 CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL  
 FRONT SHELL: NICKEL PLATED OVER COPPER  
 REAR SHELL: TIN PLATED OVER COPPER  
 SOLDER CUPS: TIN PLATED OVER NICKEL

**ELECTRICAL:**  
 CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500 Vac FOR 1 MINUTE  
 INSULATION RESISTANCE: 1000 MΩ MIN @500 VDC  
 CONTACT RESISTANCE: 30 mΩ MAX

**MISCELLANEOUS:**  
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C

CATALOG #	PACKAGING
SDH26S	1/BAG
SDH26S-TRAY	70/TRAY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.MAZEJKA	11/10/2003		
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	CHECKED BY C.McCORMICK	12/08/2003	CATEGORY DSUB	
	ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVED BY D.PARHAM	12/08/2003	PRODUCT DESCRIPTION HDB26F SOLDER CUP CONNECTOR
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. SDH26S
REF	SCALE: NONE	CAD FILE: SDH26S.SLDDRW	SHEET 1 OF 1	