


6 5 4 3 2 1

REVISION					
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	09/08/2023	BPUCHASKI	GUTTADAURO

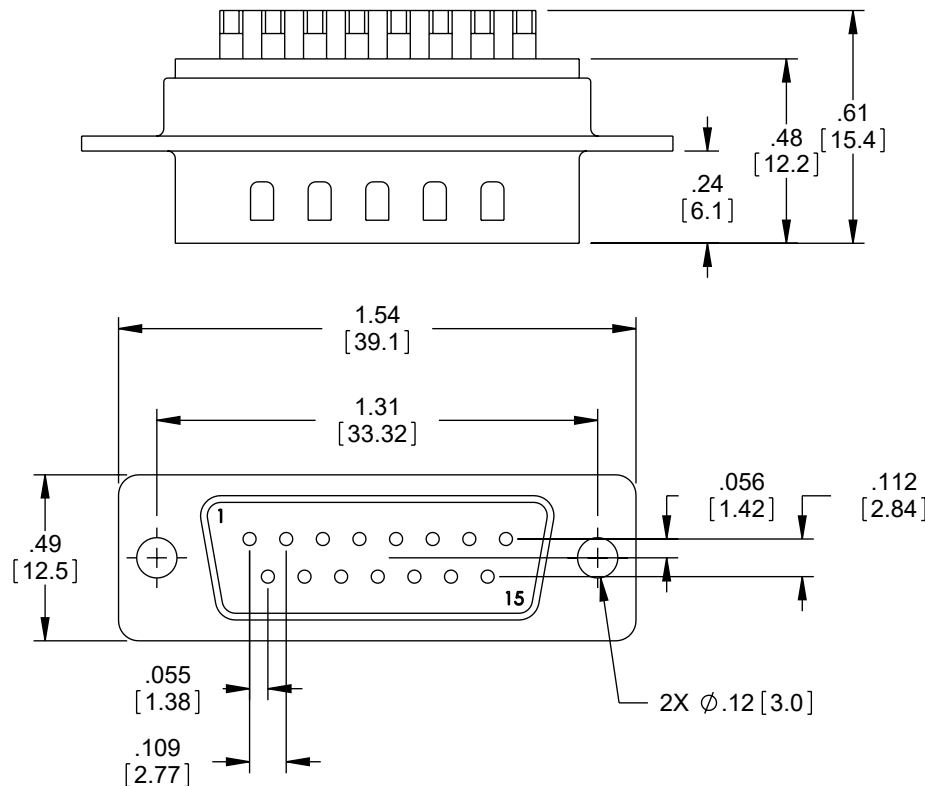

NOTES:

MATERIAL:

CONNECTOR SHELL: STEEL
CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED
CONTACTS: COPPER ALLOY

FINISH:

FRONT SHELL: NICKEL PLATED
BACK SHELL: TIN PLATED
CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL PLATE
SOLDER CUPS: TIN PLATED

ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC rms
INSULATION RESISTANCE: 5000MΩ @ 500VDC

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C TO +105°C

REGULATORY COMPLIANCE:


EU RoHS DIRECTIVE (MOST RECENT RELATED VERSION)

CATALOG #	PACKAGING
PE45981	1/BAG

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	
CABLE LENGTH TOLERANCES:	
>12 [305] ≤ 60 [1524] = +1 [25] / -0	
>60 [1524] ≤ 120 [3048] = +2 [51] / -0	
>120 [3048] ≤ 300 [7620] = +4 [102] / -0	
>300 [7620] = +6 [152] / -0	
>300 [7620] = +5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY	



Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

DESCRIPTION			
SOLDER CUP D-SUB CONNECTOR, DB15 MALE			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	BPUCHASKI	PE45981
			REV
			A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.