
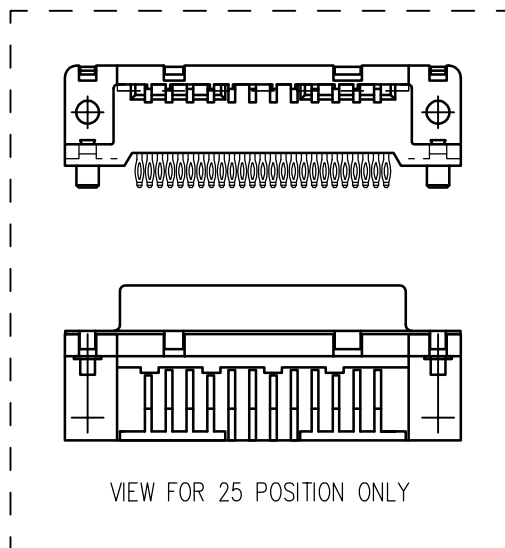
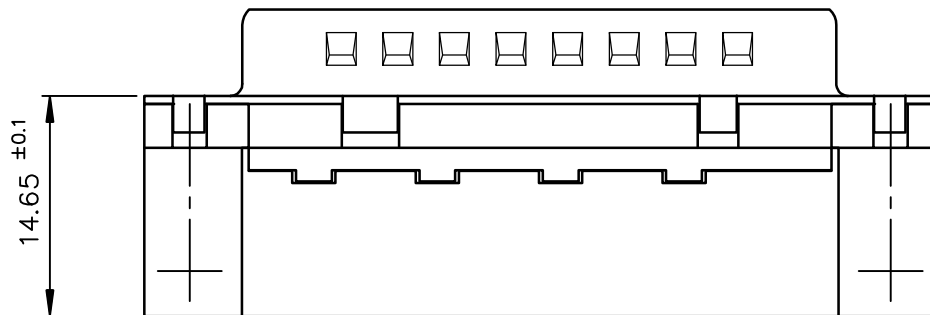
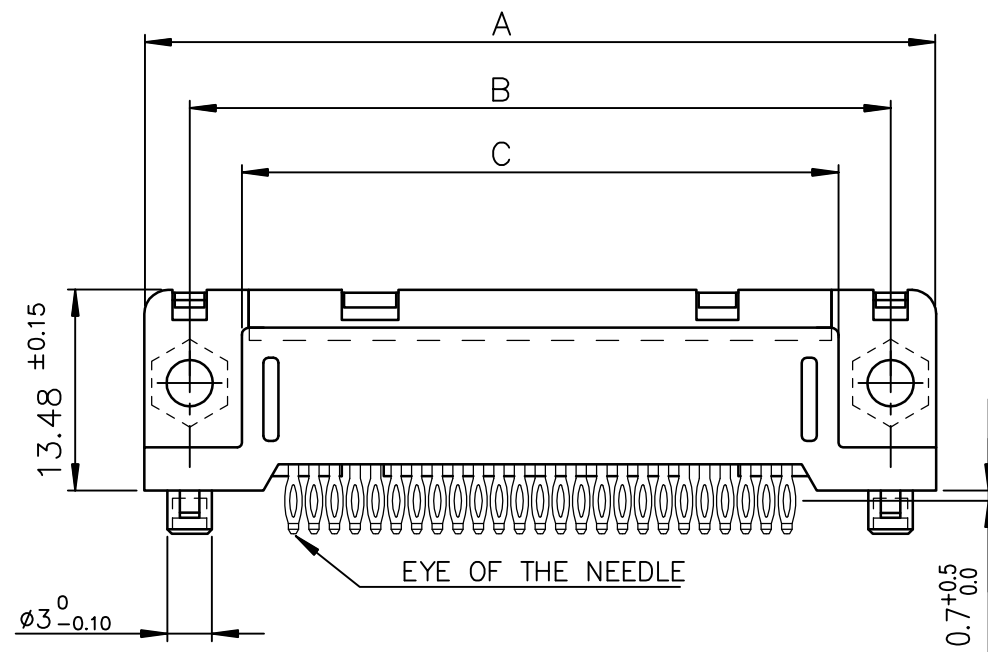
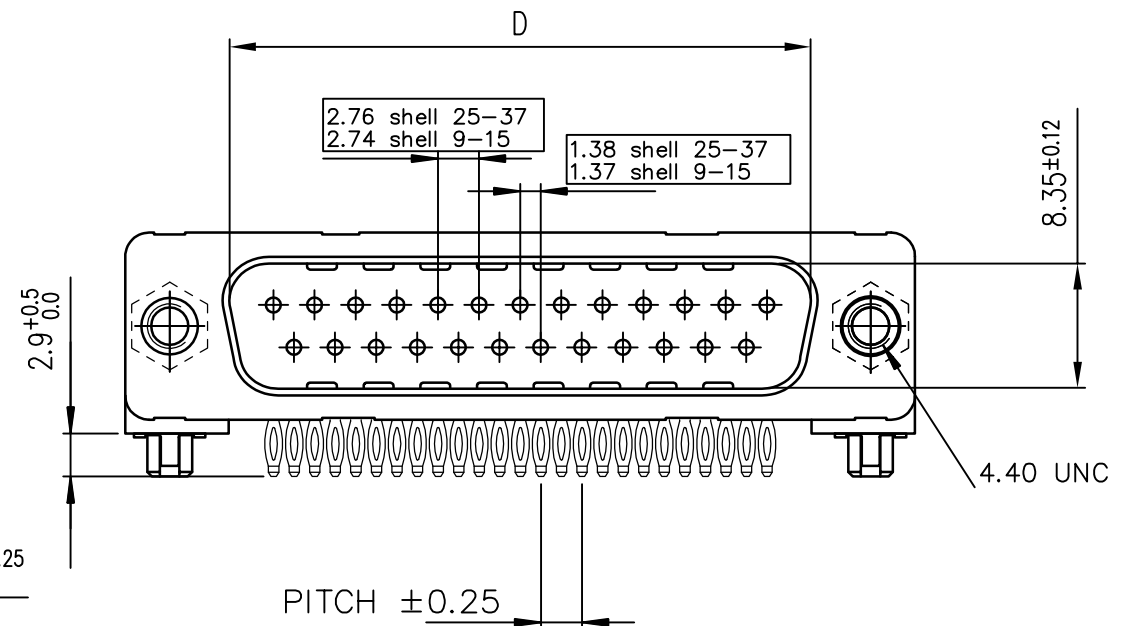
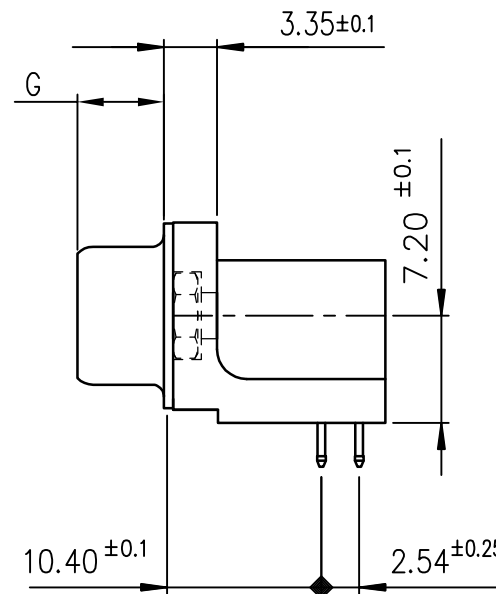


view shown without plastic pin and grounding

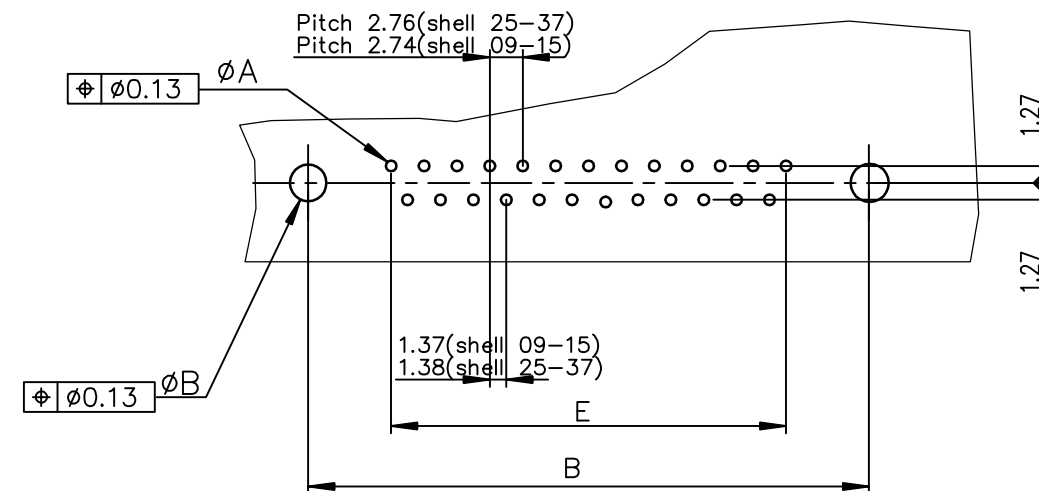


SHELL	A±0.38	B±0.12	C±0.10	D ±0.25	E±0.07	G	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.79	10.96	5.90±0.15	D09P81C4GX00LF	D09P81C6GX00LF
15	39.14	33.32	26.32	25.12	19.18	5.90±0.15	D15P81C4GX00LF	D15P81C6GX00LF
25	53.03	47.04	40.04	38.84	33.12	5.70±0.25	D25P81C4GX00LF	D25P81C6GX00LF
37	69.32	63.50	56.50	55.30	49.68	5.70±0.25	D37P81C4GX00LF	D37P81C6GX00LF
Gold flash							0.76 µ gold/GxT	

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.20)

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 101		projection 		product family D—SUB										
ltr	ecn no	dr	date	tolerances unless otherwise specified				scale 2:1		title MALE CONNECTOR DELTA-D EUROPE RIGHT ANGLED PRESS FIT										
J	ELX-I-18050	MP	2014/06/23	angles linear	.0±.01															
K	ELX-I-35350	GM	2019/11/08		.00±0.1															
					.000±0.1															
				0°±2°																
				dr	PESSON		1996/11/06				dwg no						sheet 1 of 1		size	
				enr	GREGAR M		2014/06/23				C01—8646—0513						A3			
				chr	SREERAJ K R		2019/11/08													
				appd	SANOJ P K		2019/11/08													
sheet index		revision		K																
		sheet		1																