

Accessories

CAN Accessories

▶ Sub-D9 Connector with CAN Termination

120 Ohm for High-Speed CAN systems according to ISO/IS 11898-2; SUB-D9 connector; Male to female; Pin assignment 1-to-1; R_T between pin 2 and 7




Order number

1.04.0075.03000 Sub-D9 Connector with CAN Termination

▶ CAN Termination (Plug)

120 Ohm for High-Speed CAN systems according to ISO/IS 11898-2; Male; R_T between pin 2 and 7




Order number

1.04.0075.02000 CAN Termination (Plug)

▶ CAN Termination (Socket)

120 Ohm for High-Speed CAN systems according to ISO/IS 11898-2; Female; R_T between pin 2 and 7




Order number

1.04.0075.01000 CAN Termination (Socket)

▶ CAN cable

All pins connected; Length 2.0 m; Sub-D9 plug (1 x F / 1 x M); Shield

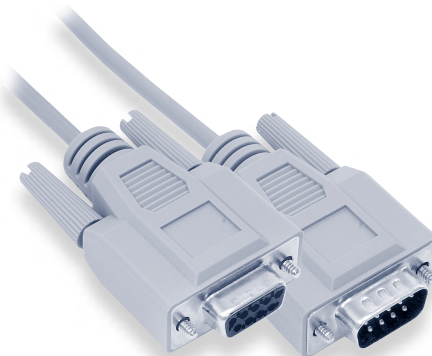


Order number

1.04.0076.00180 CAN cable



► **Y CAN cable**

All pins connected; Length 22 cm; Sub D9 socket to sub D9 socket/plug; Shield



Order number


1.04.0076.00001	Y CAN cable
-----------------	-------------

► **Nullmodem cable**

Serial cable for CAN@net, CANbridge, LIN2CAN and K2CAN; 2 x Sub D9 socket; Length 2.0 m; Shield

Pin assignment

Socket 1	Socket 2
1	7 + 8
2	3
3	2
4	6
5	5
6	4
7	1
8	1
9	N.C.
S	S

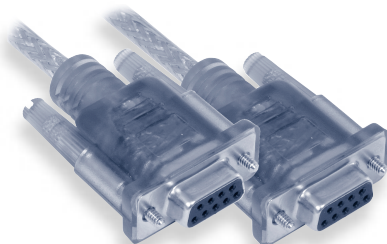

Order number


2.09.0000.00524	Nullmodem cable
-----------------	-----------------

► **Laplink cable**

Serial cable for CANlink II and CANcorder; 2 x Sub D9 socket; Length 3.0 m; Shield

Pin assignment

Socket 1	Socket 2
1	4
2	3
3	2
4	1
5	5
7	8
8	7
9	9
S	S

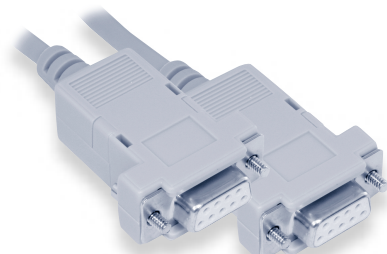


Order number

2.09.0000.00168	Laplink cable
-----------------	---------------

► **Glass fiber cable F-SMA**

Duplex; For FO repeater and star coupler; With 2 plugs on each side; Wavelength 820 nm; Glas fiber 50/125 um; Attenuation 3 dB/km




Order number

1.04.0003.01012	Glass fiber cable F-SMA (2 meter)
1.04.0003.01015	Glass fiber cable F-SMA (5 meter)

► **Glass fiber cable ST**

Duplex; For FO repeater and star coupler; With 2 plugs on each side; Wavelength 820 nm; Glas fiber 50/125 um; Attenuation 3 dB/km



Order number

1.04.0003.01022	Glass fiber cable ST (2 meter)
1.04.0003.01025	Glass fiber cable ST (5 meter)