



120x120x25mm

- Airflow: 56.5~181.0 CFM
- Static Pressure: 3.1~24.3mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 205 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
QYW12025012BL	2B	12	7~13.2	2000	56.5	3.1	130	1.56	80000	4	29.3
QYW12025012BM	2B	12	7~13.2	2800	81.8	6.0	220	2.64	80000	3	39.1
QYW12025012BH	2B	12	7~13.2	4400	127.9	14.1	550	6.60	75000	2	51.4
QYW12025012BS	2B	12	7~13.2	6000	181.0	24.3	1300	15.60	65000	1	60.5
QYW12025024BL	2B	24	12~26.4	2000	56.5	3.1	85	2.04	80000	4	29.3
QYW12025024BM	2B	24	12~26.4	2800	81.8	6.0	130	3.12	80000	3	39.1
QYW12025024BH	2B	24	12~26.4	4400	127.9	14.1	320	7.68	75000	2	51.4
QYW12025024BS	2B	24	12~26.4	6000	181.0	24.3	700	16.80	65000	1	60.5
QYW12025048BL	2B	48	24~56.0	2000	56.5	3.1	60	2.88	80000	4	29.3
QYW12025048BM	2B	48	24~56.0	2800	81.8	6.0	85	4.08	80000	3	39.1
QYW12025048BH	2B	48	24~56.0	4400	127.9	14.1	180	8.64	75000	2	51.4
QYW12025048BS	2B	48	24~56.0	6000	181.0	24.3	400	19.20	65000	1	60.5


2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available
05 12 24 48

Bearing System Available
2B L S

Function Available
N A I F R Q S T M V C P D W U

PERFORMANCE P-Q CURVE

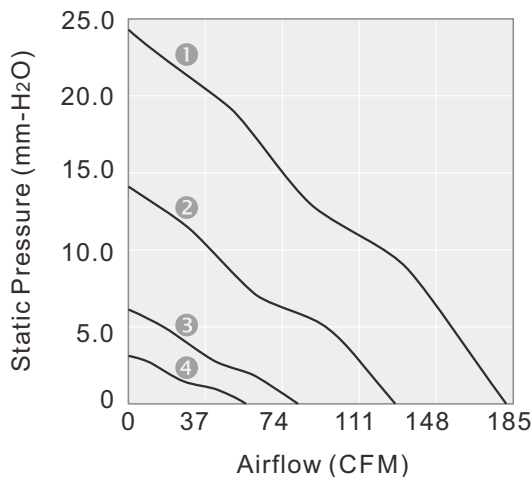

OUTLINE DIMENSIONS

