

Introduction

The SA50-120 is an isolated DC-to-DC converter capable of delivering up to 50W of output power in a small size design. The SA family provides a radiation-hardened option with top class TID and SEE performance for space and military applications. With forward converter topology and a patented magnetic feedback scheme, the SA50-120 is optimized for applications where isolated DC voltage conversion is required. The discrete surface mount design facilitates customization with reasonable lead time and modest NRE cost.

The SA50-120 series implements an internal EMI input filter that complies to MIL-STD-461. The EMI filter consists of differential- and common-mode components to attenuate conductive EMI noise effectively.

As the only non-hybrid space-grade DC-DC power converter module in the market, the SA50-120 series excels in its robustness in the applications with 8.22×10^6 hours of MTBF.

The SA50-120 is available in a 3.055" x 2.055" x 0.5" package.

Table of Contents

Introduction.....	1
1. Benefits and Features.....	3
2. Radiation Performance.....	4
3. Typical Applications Circuits.....	5
4. Absolute Maximum Ratings.....	6
5. Electrical Parameters.....	7
6. Radiation Specification (Note 1).....	13
7. Sample Electrical Waveforms (For Reference Only).....	14
8. Pin Configuration.....	16
9. Pin Description.....	17
10. Radiation Performance (H) Hardened.....	18
11. Radiation Performance (P) Prototype.....	19
12. Mechanical Outline (Axial Pins) Package.....	20
13. Mechanical Outline (Radial Pins) Package.....	21
14. Qualification Test (Reference Report QTR996).....	22
15. ATP Screening Test (H) Hardened.....	23
16. ATP Screening Test (P) Prototypes.....	24
17. Ordering Information.....	25
18. Revision History.....	26
Microchip Information.....	27
The Microchip Website.....	27
Product Change Notification Service.....	27
Customer Support.....	27
Microchip Devices Code Protection Feature.....	27
Legal Notice.....	27
Trademarks.....	28
Quality Management System.....	29
Worldwide Sales and Service.....	30

1. Benefits and Features

- Up to 50W Output Power
- 86 VDC to 158 VDC Input Range
- Four Output Configurations Available

Main	Aux A/B	Base Part number
3.3V	12V	SA50-120-3R3-12T
3.3V	15V	SA50-120-3R3-15T
5V	12V	SA50-120-5-12T
5V	15V	SA50-120-5-15T

- Dual Isolated 12V or 15V Auxiliary Outputs
- Up to 80% Efficiency @ Full Load
- <1% Output Ripple
- Internal EMI Filter Compliant to MIL-STD-461
- Forward Topology
- Patented Magnetic Feedback
- Inhibit Pin for Electrical ON/OFF
- Isolated Synchronization Input
- Low Mass 120g
- Flight Proven Technology with $>8 \times 10^6$ Hours of MTBF
- Product is Classified as EAR99
- Customization of Input/Output Voltages Available Upon Request

2. Radiation Performance

- TID >100 krad (Si) and 30 krad (Si) ELDRS (<10 mrad/s) per MIL-STD-883 Method 1019
- SEE (SEGR, SEB, SET, SEL) immunity 82 MeV·cm²/mg

3. Typical Applications Circuits

Figure 3-1. SA50-120 Triple Typical Application Circuit

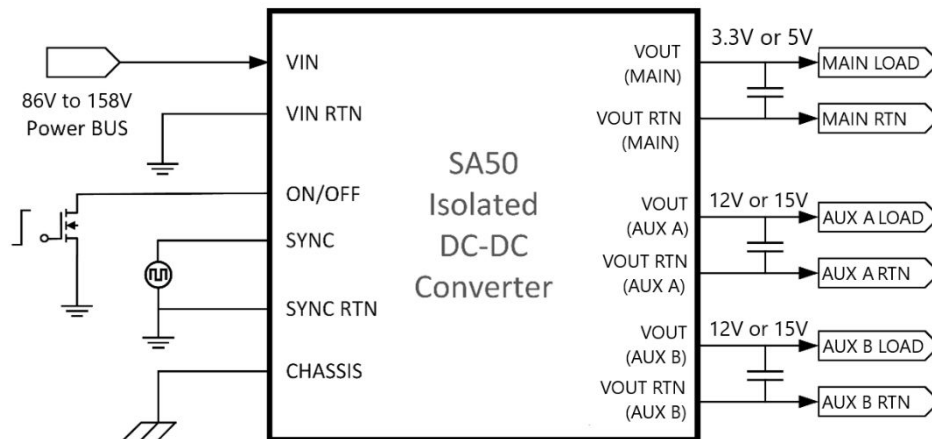


Figure 3-2. SA50-120 Triple AUX Outputs Parallel Application Circuit


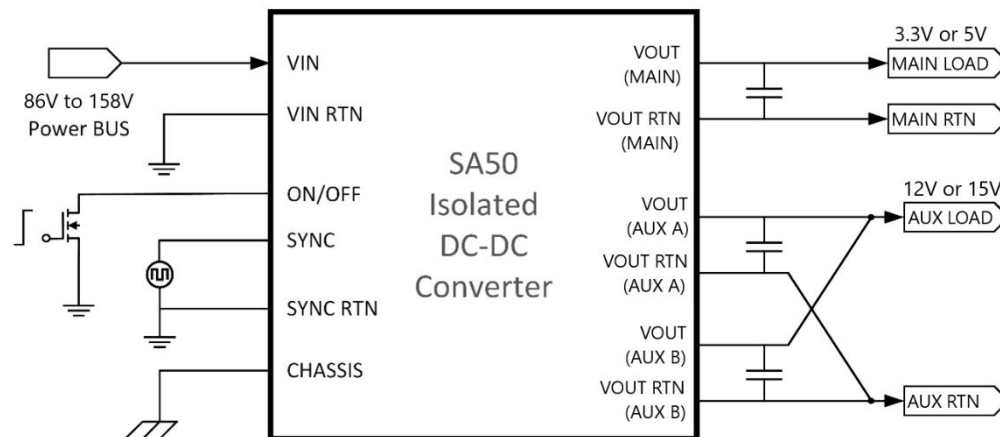


Figure 3-3. SA50-120 Triple AUX Split Outputs Application Circuit

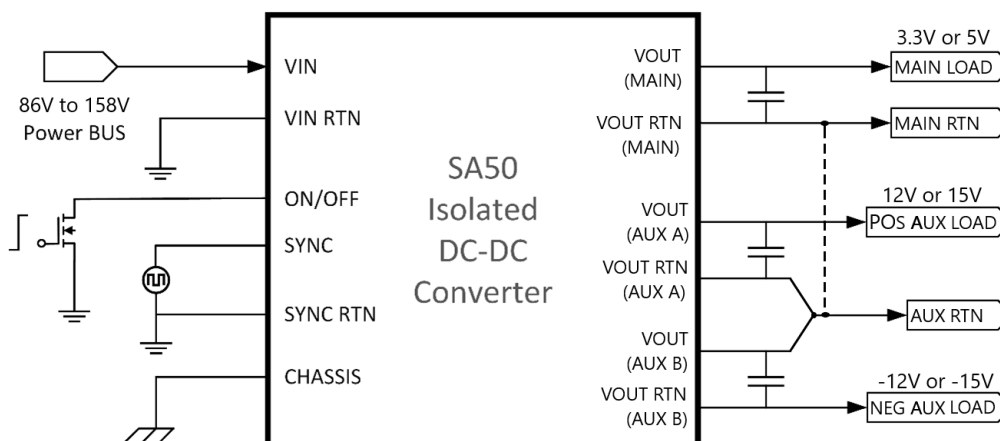

Note: With each output of the SA50-120 isolated from each other, there are more possible connections. These are circuits that will be found in typical applications.

4. Absolute Maximum Ratings

Rating	Value
V_{IN} range	-0.5 VDC to 165 VDC
Output power	50W
Lead temperature	300°C for 10s
Operating temperature	-55°C to 125°C
Storage temperature	-55°C to 125°C
Shock	1500g _{pk} , 0.5 ms, ½ sine
Constant acceleration	50g
Random vibration	24.06g _{rms} , 50 Hz to 2000 Hz

5. Electrical Parameters

This section shows the electrical parameters of the SA50-120 Triple Series device under the following conditions, unless otherwise specified:

Parameter	Output	Conditions	Min	Nom	Max	Units
Input voltage all configurations						
(Vin)		Note 2	86	120	158	V
Output Voltages by configuration (V _{out})						
SA50-120-3R3-12T-x-x		I _{OUT} = 100% rated load				V
(MAIN)	3.3V		3.27	3.30	3.33	
(AUX A/B)	12V		11.59	12.00	12.41	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		3.27	3.30	3.33	
(AUX A/B)	15V		14.46	14.75	15.05	
SA50-120-5-12T-x-x						
(MAIN)	5V		5.08	5.10	5.12	
(AUX A/B)	12V		11.75	12.00	12.24	
SA50-120-5-15T-x-x						
(MAIN)	5V		5.08	5.10	5.12	
(AUX A/B)	15V		14.46	14.75	15.05	
Output Power by configuration (P _{out})						
SA50-120-3R3-12T-x-x		Note 3	4.32	—	43.2	W
SA50-120-3R3-15T-x-x			4.32	—	43.2	
SA50-120-5-12T-x-x			5	—	50	
SA50-120-5-15T-x-x			5	—	50	

.....continued

Parameter	Output	Conditions	Min	Nom	Max	Units
Output Current by configuration (I _{out})						
SA50-120-3R3-12T-x-x		In all cases Output power must be kept within P _{out} rating. Note 13, 14, 15, 16				mA
(MAIN)	3.3V		400	—	4000	
(AUX A/B)	12V		125	—	1250	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		400	—	4000	
(AUX A/B)	15V		100	—	1000	
SA50-120-5-12T-x-x						
(MAIN)	5V		400	—	4000	
(AUX A/B)	12V		125	—	1250	
SA50-120-5-15T-x-x						
(MAIN)	5V		400	—	4000	
(AUX A/B)	15V		100	—	1000	
Line regulation by configuration (VR _{LINE})						
SA50-120-3R3-12T-x-x		V _{IN} = 86 V, 120 V, 158 V I _{OUT} = 10%, 50%, 100% rated Note 12				mV
(MAIN)	3.3V		-10	—	10	
(AUX A/B)	12V		-120	—	120	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		-10	—	10	
(AUX A/B)	15V		-150	—	150	
SA50-120-5-12T-x-x						
(MAIN)	5V		-10	—	10	
(AUX A/B)	12V		-120	—	120	
SA50-120-5-15T-x-x						
(MAIN)	5V		-10	—	10	
(AUX A/B)	15V		-150	—	150	

.....continued

Parameter	Output	Conditions	Min	Nom	Max	Units
Load regulation by configuration (VR _{LOAD})						
SA50-120-3R3-12T-x-x		V _{IN} = 86 V, 120 V, 158 V I _{OUT} = 10%, 50%, 100% rated Note 11				mV
(MAIN)	3.3V		-50	—	50	
(AUX A/B)	12V		-400	—	400	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		-50	—	50	
(AUX A/B)	15V		-500	—	500	
SA50-120-5-12T-x-x						
(MAIN)	5V		-50	—	50	
(AUX A/B)	12V		-400	—	400	
SA50-120-5-15T-x-x						
(MAIN)	5V		-50	—	50	
(AUX A/B)	15V		-500	—	500	
Cross Regulation (VR _{cross})						
(Aux)	—	V _{IN} = 86 V, 120 V, 158 V I _{OUT} = 2.5A to 1A and 2.5A to 4A on main, and ±half the rated current on the Aux outputs	-3.0	—	3.0	%
Input current all configurations (I _{IN})						
(lin)	—	I _{OUT} =0, pin3 open	—	7	35	mA
		Pin 3 short to pin 2		3	5	
Output ripple all configurations (V _{RIP})						
(Main)	—	V _{IN} = 86 V, 120 V, 158 V I _{OUT} = 100% rated, Note 4	—	25	50	mV _{pp}
(Aux)	—		—	37.5	75	
Switching frequency all configurations (FS)						
(FS)	—	Sync input (pin 4) open	200	220	240	kHz
Efficiency by configuration (eff)						
SA50-120-3R3-12T-x-x		I _{OUT} = 100% rated load	80	86	—	%
SA50-120-3R3-15T-x-x			80	86	—	
SA50-120-5-12T-x-x			80	86	—	
SA50-120-5-15T-x-x			80	86	—	

.....continued

Parameter	Output	Conditions	Min	Nom	Max	Units
Inhibit input all configurations						
Inhibit input: ON Threshold		Note 1	4.5	—	—	V
Inhibit input: OFF (sink)			1000	—	—	μA
Inhibit input: OFF Threshold				—	2	V
Current limit all configurations						
Current limit point (% rated output)		When V _{OUT} = 90% of nominal set point	105	—	145	%
Synchronization all configurations						
Synchronization frequency range		The external clock on sync input (pin 4) Note 1	500	—	600	kHz
Synchronization pulse-high level			4.0	—	10.0	V
Synchronization pulse-low level			-0.5	—	0.5	V
Synchronization pulse-transition rate			200	—	—	V/μs
Synchronization pulse-duty cycle			10	—	80	%
Power dissipation all conditions, load fault						
(P _D)	—	Short circuit, overload, Note 6	—	—	18	W
Output response to step load changes all configurations						
(V _{TLD})	—	(50% to/from 100%) rated load Note 7	-300	—	300	mV _{pk}
Recovery time, step load changes all configurations						
(T _{TLD})	—	(50% to/from 100%) rated load Notes 7, 8	—	200	2000	μs
Output response to step line changes all configurations						
(V _{TLN})	—	86V to / from 158V I _{OUT} = 100% rated load Note 9	-300	—	300	mVpk
Recovery time, step line changes all configurations						
(T _{TLN})	—	86V to/from 158V I _{OUT} = 100% rated load Notes 8, 9	—	50	2000	μs

.....continued

Parameter	Output	Conditions	Min	Nom	Max	Units
Turn-on response: overshoot by configuration (V _{OS}) (main)						
SA50-120-3R3-12T-x-x		(0% to 100%) rated load Notes 3, 4, 10				mV
(MAIN)	3.3V		—	—	500	
(AUX A/B)	12V		—	—	750	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		—	—	500	
(AUX A/B)	15V		—	—	750	
SA50-120-5-12T-x-x						
(MAIN)	5V		—	—	500	
(AUX A/B)	12V		—	—	750	
SA50-120-5-15T-x-x						
(MAIN)	5V		—	—	500	
(AUX A/B)	15V		—	—	750	
Turn-on response: turn-on delay all configurations						
(T _{DLY})	—	Note 10	0.1	—	10	ms
Capacitive load by configuration (C _{LOAD})						
SA50-120-3R3-12T-x-x		Note 5				μF
(MAIN)	3.3V		—	—	1000	
(AUX A/B)	12V		—	—	250	
SA50-120-3R3-15T-x-x						
(MAIN)	3.3V		—	—	1000	
(AUX A/B)	15V		—	—	200	
SA50-120-5-12T-x-x						
(MAIN)	5V		—	—	1000	
(AUX A/B)	12V		—	—	250	
SA50-120-5-15T-x-x						
(MAIN)	5V		—	—	1000	
(AUX A/B)	15V		—	—	200	
Line rejection						
—	—	DC to 50 kHz, I _{OUT} = 100% rated load	40	60	—	dB

.....continued

Parameter	Output	Conditions	Min	Nom	Max	Units
Isolation						
—	—	200V @ 25°C 1. Input (1-3) to All (4-12) 2. Sync (4-5) to all (1-3, 6-12) 3. Main (11-12) to All(1-5, 7-10) 4. AuxB (7-8) to All (1-5, 9-12) 5. AuxA (9-10) to All (1-5, 7-8, 11-12)	100	—	—	MΩ
Mass						
—	—	Standard case style A, B	—	120	—	g
MTBF						
—	—	MIL-HDBK-217F2, SF, 35°C	—	8.22x10 ⁶	—	hrs

6. Radiation Specification (Note 1)

Environment	Conditions	Min	Unit
TID (gamma)	MIL-STD-883, method 1019 The operating bias applied during exposure	100	krad (Si)
Neutron fluence	MIL-STD-883, 1017	1E12	Neutrons
SEE SEU, SEL, SEGR, SEB	Heavy ions [LET] The operating bias applied during exposure	82	MeV•cm ² /mg

Notes:

- Parameter not 100% tested, and only assured by design.
- Parameter verified during line and load regulation tests. Regulation is specified for 10% to 100% loading on all outputs.
- The “-H” option incorporates FET technology providing a > 82 MeV•cm²/mg (gold ion) SEE capability to the design. The “-P” option is not rated for radiation.
- Tested and verified using a 20 kHz to 10 MHz bandwidth. Ripple is measured across a 50 Ohms termination with a 10 nF Cap in series. Results applicable for DC to 20 MHz bandwidth.
- The capacitive load may be any value from 0 to the maximum limit without compromising DC performance. A capacitive load exceeding the maximum limit may interfere with the proper operation of the converter's overload protection, potentially causing erratic behavior during turn-on.
- Overload power dissipation is defined as the device power dissipation with the load set such that $V_{OUT} = 90\%$ of nominal.
- The load step transition time is $\geq 10 \mu s$.
- Recovery time is measured from the initiation of the transient to where V_{OUT} returned to within $\pm 1\%$ of its steady-state value.
- The line step transition time is $\geq 100 \mu s$.
- Turn-on delay time from either a step application of input power or a logic low to a logic high transition on the inhibit pin (pin 3) to the point where $V_{OUT} = 90\%$ of nominal.
- Load regulation relative to the output voltage at 50% rated load.
- Line regulation relative to the output voltage at 120 VDC input.
- For operation at temperatures between 85°C and 125°C: de-rate power linearly from 50W (or rated maximum) to zero. Parameter limits are not guaranteed.
- Auxiliary output regulation is not maintained if main output load is less than 10%.
- Auxiliary output requires at least 10% loading for specified regulation. Voltage may increase at lighter loads and is limited by overvoltage Zener diodes.
- Unless otherwise specified, rated load means 20W on the main, and 15W on each Auxiliary output. Other load settings are acceptable provided the total of 50W is not exceeded and minimum output current limits are satisfied.

7. Sample Electrical Waveforms (For Reference Only)

Figure 7-1. SA50-120 Output Efficiency

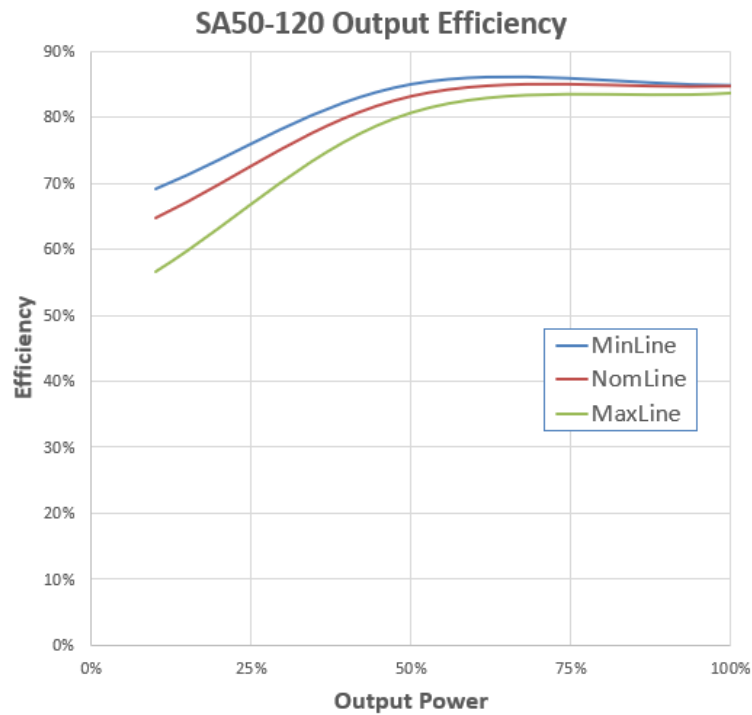


Figure 7-2. SA50-120 EMI Characterization

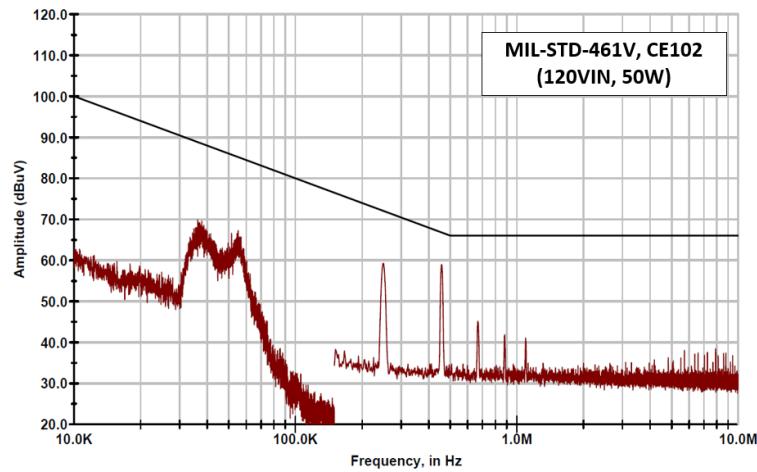


Figure 7-3. Load Transient Response



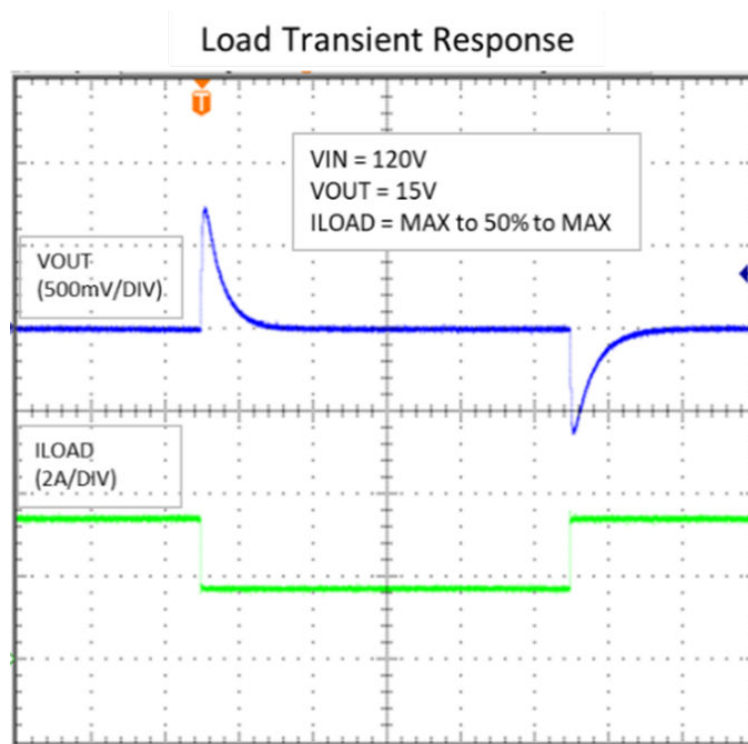


Figure 7-4. Output Voltage Ripple

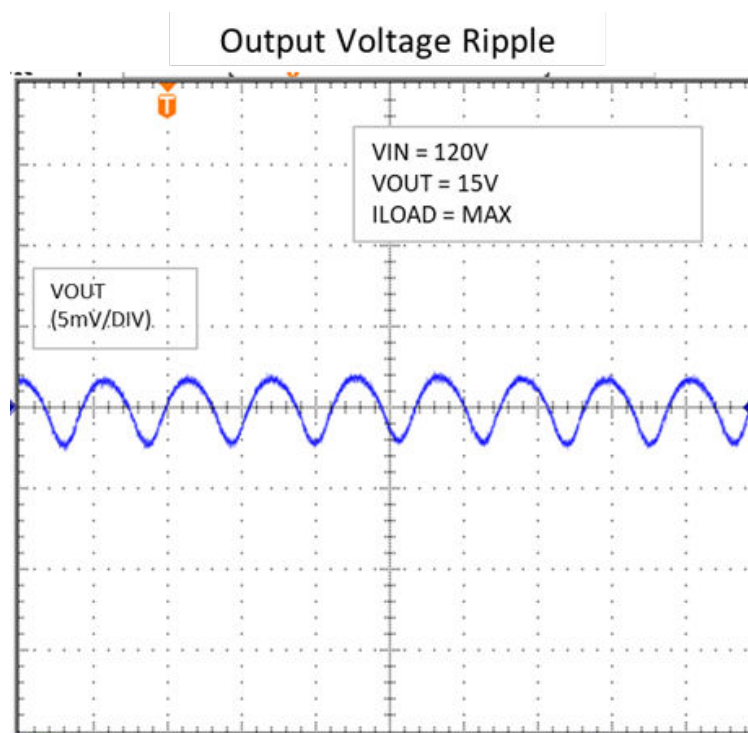

8. Pin Configuration

Figure 8-1. SA50 Triple Pin Configuration

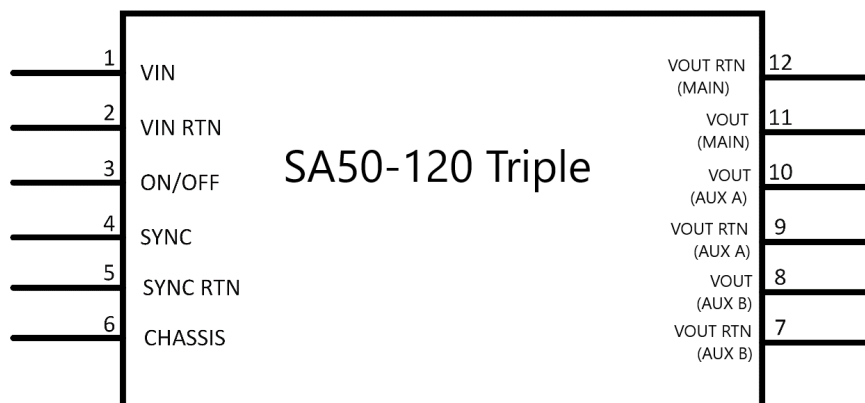

9. Pin Description

PIN	NAME	Description
1	VIN	Input Voltage
2	VIN RTN	Input Voltage Return/Ground
3	ON/OFF (INHIBIT)	Power Supply ON/OFF, [ON(OPEN/HIGH), OFF(SHORT/LOW)]
4	SYNC	External Clock Signal Input
5	SYNC RTN	External Clock Signal Return
6	CHASSIS	Chassis Pin
7	VOUT (AUX B) RTN	Auxiliary B Vout return
8	VOUT (AUX B)	Auxiliary B Vout
9	VOUT (AUX A) RTN	Auxiliary A Vout return
10	VOUT (AUX A)	Auxiliary A Vout
11	VOUT (MAIN)	Main Vout
12	VOUT (MAIN) RTN	Main Vout return

10. Radiation Performance (H) Hardened

- TID >100 krad (Si) and 30 krad (Si) ELDRS (<10 mrad/s) per MIL-STD-883 Method 1019
- SEE (SEGR, SEB, SET, SEL) immunity 82 MeV·cm²/mg (H-hardened)

11. Radiation Performance (P) Prototype

Prototype units are functionally the same except the components are not radiation hardened. To be used for system checkout.

12. Mechanical Outline (Axial Pins) Package

Figure 12-1. Axial Pins and Thru-Hole Tabs Package (-A)


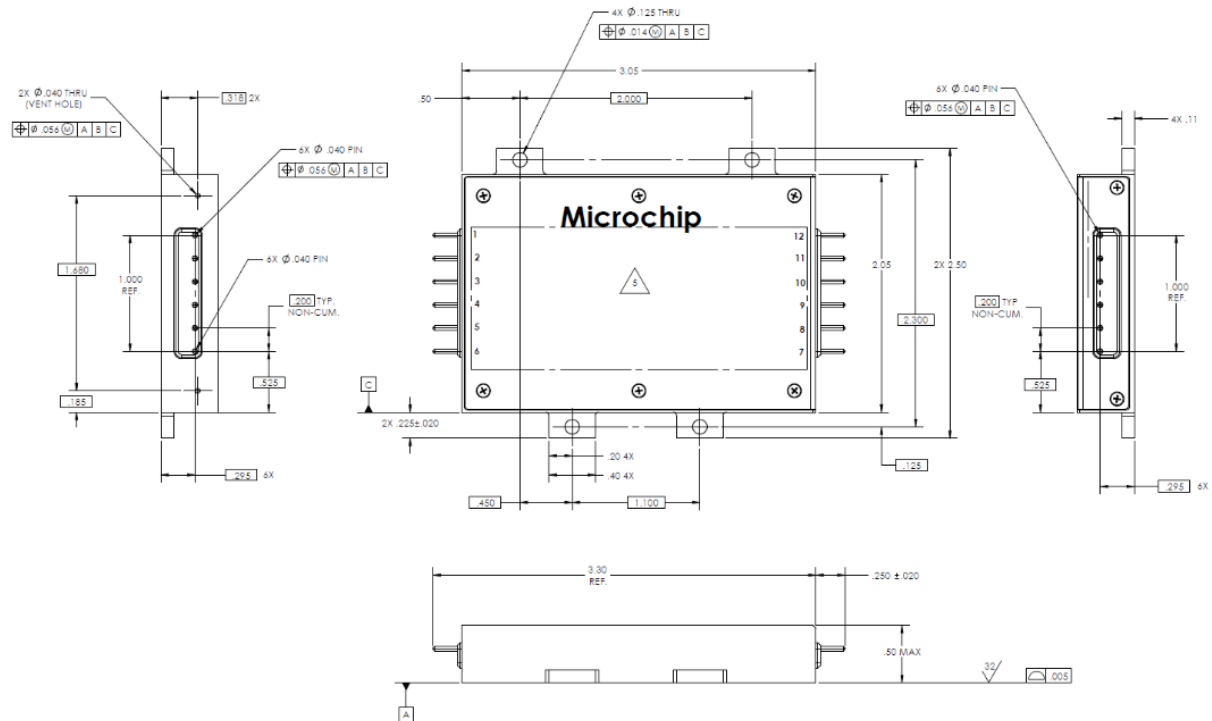


Figure 12-2. Axial Pins and Threaded Tabs Package Bottom View (-C or -E)

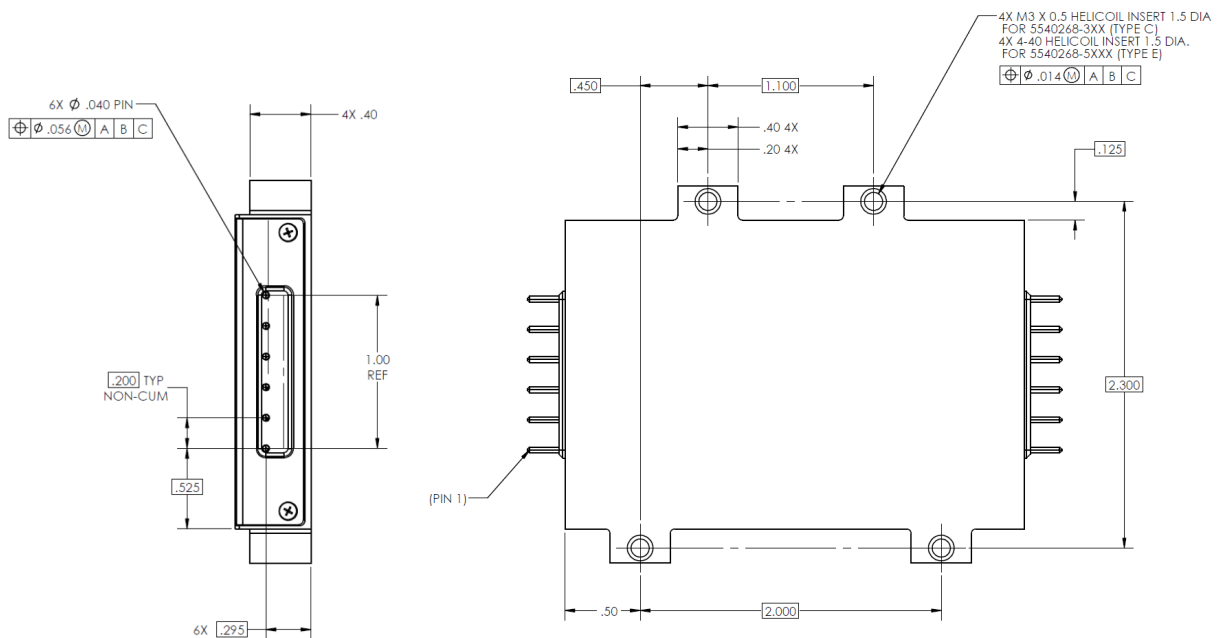

13. Mechanical Outline (Radial Pins) Package

Figure 13-1. Radial Pins and Thru-Hole Package (-D)


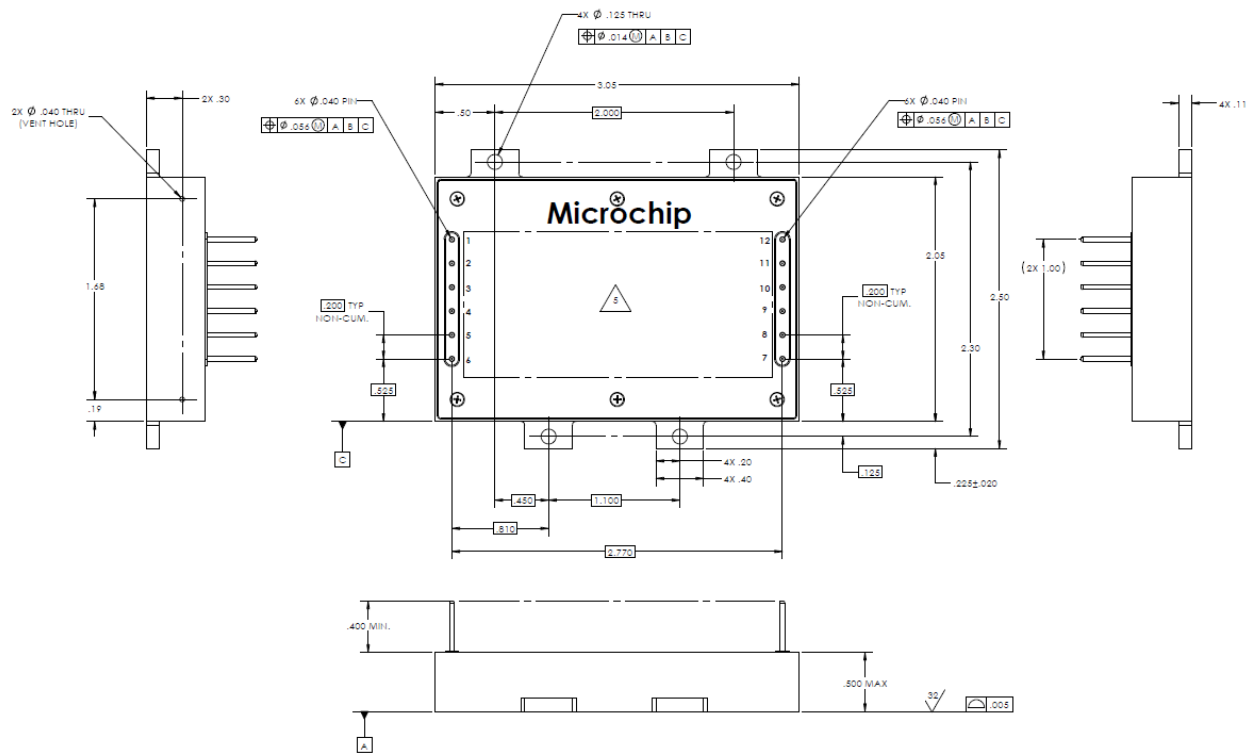


Figure 13-2. Radial Pins and Threaded Package Bottom View (-B or -F)

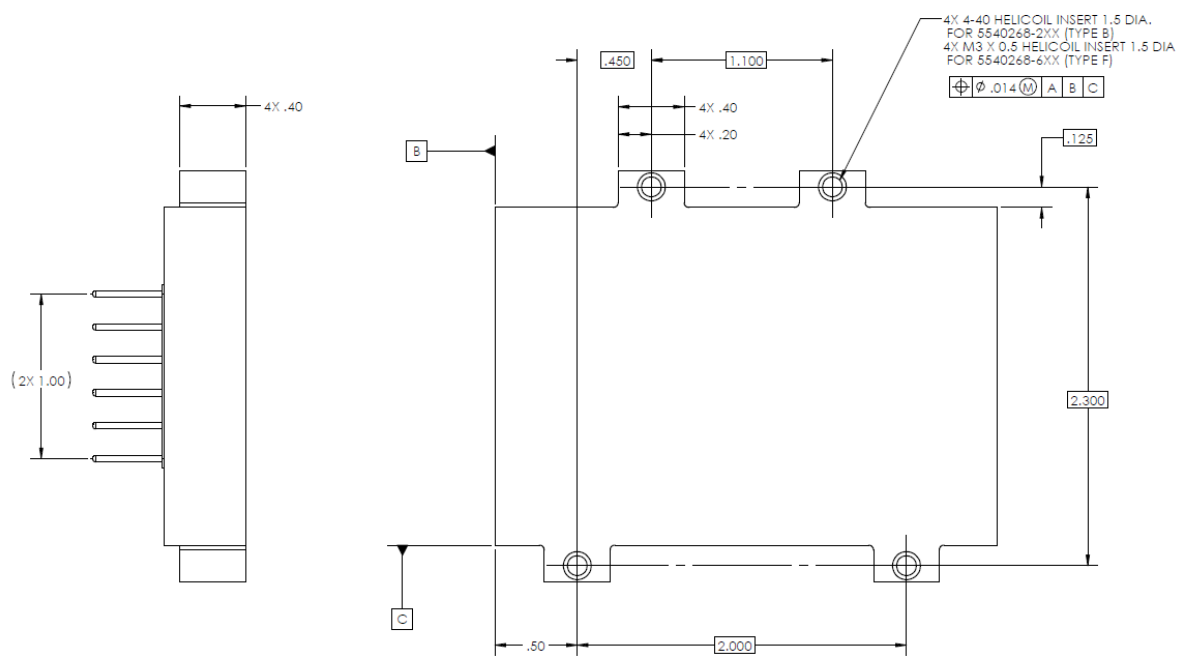

14. Qualification Test (Reference Report QTR996)

Test 1	Conditions
External Visual	Per O&M – Dimensions and mass or STD 883 2009
Electrical	Read and record (-55°C, 25°C, 85°C)
Shock, Non-Operating	MIL-STD-202, method 213, test condition F, 1500 g _{pk} , 0.5 ms ½ sine pulse Three pulses in each direction of each axis, 18 pulses total
Vibration, Operating	MIL-STD-202, method 214, condition II-F, 24.06 grms random vibrations, 50 Hz – 2000 Hz, 3 min/axis (9 min total) Outputs monitored
Temperature Cycling	10 cycles from base plate temperature, MIL-STD-883, method 1010.9, condition A
EMI	CE101, CE102, CS101, RE101, RE102, RS101, RS103 per MIL-STD-461 with setup per MIL-STD-462
External Visual Inspection	No damage
Steady State Life Test	1000 hrs at Tc = 105°C, 50% of rated load
End-Point Electricals	Read and record (-55°C, 25°C, 85°C)


15. ATP Screening Test (H) Hardened

Requirement	Test Method/Condition
External Visual	O&M – Dimensions and mass
Initial Electrical	Full performance at +25°C
Vibration	Workmanship non-operating vibration MIL-STD-202, Method 214, Condition II-A, 6.21 grms random vibrations, 50-2000 Hz, 1-minute perpendicular to the board
Post Vibration Electrical	Full performance at +25°C
Temperature Cycle	MIL-STD-883, Method 1010, Condition A, 1 cycle, +85°C to -55°C, operating Outputs monitored during thermal cycles
Burn-in	40 hrs @ 105°C, 50% of rated load (outputs monitored)
Final Electrical	Full performance at +25°C (deliverable data)
External Visual	No damage

16. ATP Screening Test (P) Prototypes

Requirement	Test Method/Condition
External Visual	O&M – Dimensions and mass
Electrical	Full performance at +25°C
Vibration	None
Temperature Cycle	None
Burn-in	None
External Visual	No damage

17. Ordering Information

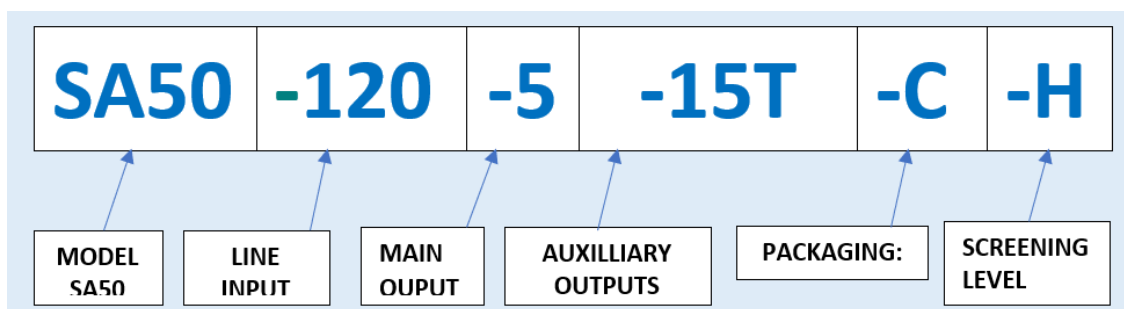

Model	SA50	Standard Applications 50W, 120V input modules.		
Line Input	-120	120.0V	Line input voltage (120V nominal input)	
Main	-3R3	3.3V	Main output voltage	
	-5	5V		
Aux	-12T	12V	Auxiliary output voltages (A and B outputs identical)	
	-15T	15V		
Mechanical Package	-A	Axial	0.125 in thru-hole	Mechanical packaging options. Electrical connections are either Radial or Axial. Mounting holes are drilled thru-hole or tapped.
	-B	Radial	4-40 thread	
	-C	Axial	M3 thread	
	-D	Radial	0.125 in thru-hole	
	-E	Axial	4-40 thread	
	-F	Radial	M3 thread	
Radiation Hardness	-H	Hardened	Microchip offers units with two levels of radiation screening. Hardened and Prototype (non-hardened) units.	
	-P	Prototype		

Note: Other input voltage and output voltage combinations are available. Contact your local sales representative.

Microchip also offers a thermal interface, the ST-2X3; this is a non-silicon, space-approved thermal interface. The data sheet is available upon request.

18. Revision History

Revision	Date	Description
E	07/2023	Updates: • 6. Radiation Specification (Note 1) – Removed dose rate environment • 7. Sample Electrical Waveforms (For Reference Only) – Updated figures • 12. Mechanical Outline (Axial Pins) Package – Updated heading and figure titles • 13. Mechanical Outline (Radial Pins) Package – Updated heading and figure title • 14. Qualification Test (Reference Report QTR996) – Updated Shock, non-operating; Vibration, operating; and EMI test conditions • 15. ATP Screening Test (H) Hardened – Updated Vibration test method/condition
D	07/2022	Updated Electrical information in the ATP Screening Test (P) Prototypes table
C	04/2022	Updated Figure 13-1

Microchip Information

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable". Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure

that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2022-2023, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-6683-2682-4

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com	Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040	India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820