5148468-1 ACTIVE

EUROCARD

TE Internal #: 5148468-1


Eurocard Connectors, Plug, Board-to-Board, 144 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, 48

Column

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

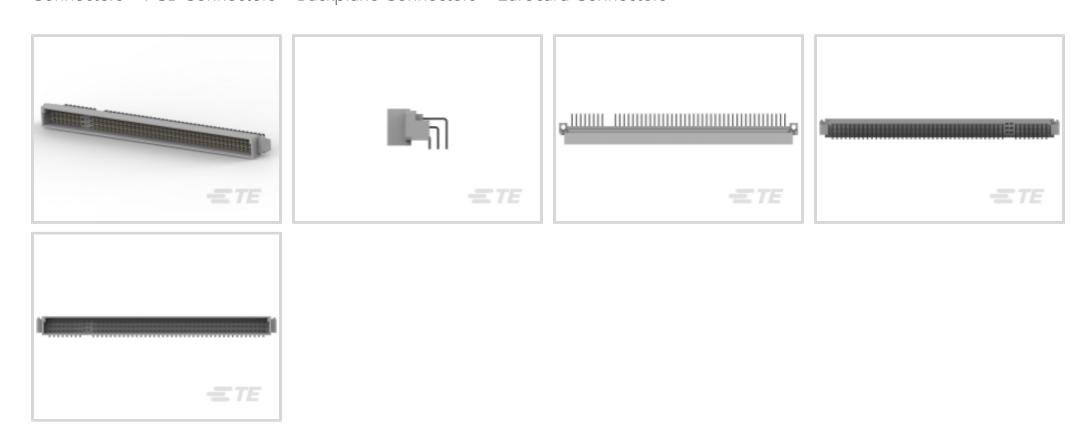

Connector & Housing Type: Plug
Connector System: Board-to-Board

Termination Post & Tail Length: 2.64 mm [.104 in]

Number of Positions: 144

Centerline (Pitch): 2.54 mm [.1 in]

Features

Product Type Features

Connector & Housing Type	Plug
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Standard
DIN Level	II
Configuration Features	
Number of Positions	144
Number of Rows	3
PCB Mount Orientation	Right Angle
Number of Columns	48
Number of Signal Positions	144
Rows Loaded	A, B, C
Contact Features	

Pin

Contact Type



Contact Base Material	Copper Alloy
Contact Current Rating (Max)	1.5 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post & Tail Length	2.64 mm[.104 in]
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240)



	1	contain		
	$n \cap T$	contain	$R \vdash \Delta (\vdash \vdash $	1 > \/ H(
17053	11()1			1 .) V I I (

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC
	Free

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Customers Also Bought











TE Part #1SNS420000Z0355

ENT 10294

TE Part #1SNS420000Z0388

ENT 10325

TE Part #2029173-6
6P VRT HDR VAL-U-LOK V0 W/ODH

Documents

Product Drawings

ASSY, PIN, EUROCARD, TYPE C, LEAD-FREE, 144/1

English

CAD Files

Customer View Model

ENG_CVM_CVM_5148468-1_O.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5148468-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5148468-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English