

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Flat, fuse type: C, nom. voltage: 48 V, nominal current: 25 A, connection method: Push-in connection, Rated cross section: 10 mm², cross section: 0.5 mm²- 16 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- Quick identification of faulty fuses, thanks to LED status indicator
- Convenient testing of fuses with test pick-offs on both sides
- The easily accessible fuse inserts are easy to use or replace
- The compact design and front connection enable wiring in a confined space

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- Suitable for all flat-type fuse-links designed according ISO 8820-3 (DIN 72581-3)

Commercial data

Item number	1088501
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BE22
Product key	BE2236
GTIN	4055626889825
Weight per piece (including packing)	31.61 g
Weight per piece (excluding packing)	31.61 g
Customs tariff number	85369010
Country of origin	CN

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Technical data

Notes

General

Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.
------	--

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Flat
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.82 W
Fuse	C

Connection data

Number of connections per level	2
Nominal cross section	10 mm ²
Rated cross section AWG	6
Note	The current is determined by the fuse used, the voltage by the light indicator.
Stripping length	18 mm ... 20 mm
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm ² ... 16 mm ²
Cross section AWG	20 ... 6 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 10 mm ²
Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve)	0.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	25 A
Maximum load current	30 A
Nominal voltage	48 V
Nominal cross section	10 mm ²

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Connection cross sections directly pluggable

Conductor cross section rigid	1 mm² ... 16 mm²
Conductor cross-section flexible (ferrule without plastic sleeve)	1 mm² ... 10 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	1 mm² ... 10 mm²

Dimensions

Width	10.2 mm
Height	88.9 mm
Depth	49.5 mm
Depth on NS 35/7,5	50.5 mm
Depth on NS 35/15	58 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s²)²/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Result	Test passed
--------	-------------

Shocks

Specification	DIN EN 50125-3 (VDE 0115-108-3):2003-10
Pulse shape	Half-sine
Acceleration	20 m/s ²
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

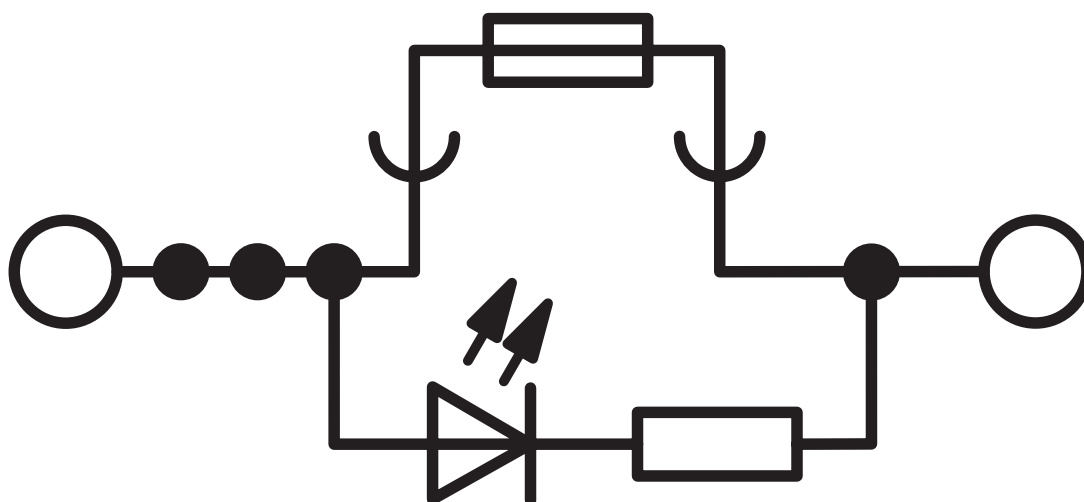

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1088501>

 CSA Approval ID: 158887				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	25 A	20 - 6	-
Use group C	300 V	25 A	20 - 6	-
Use group D	600 V	5 A	20 - 6	-

 EAC Approval ID: RU C-DE.BL08.B.00644				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
--	--	--	--	--

 cULus Recognized Approval ID: E60425				
--	--	--	--	--

 cULus Recognized Approval ID: E60425				
--	--	--	--	--

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 5-10 - Plug-in bridge

3005948

<https://www.phoenixcontact.com/us/products/3005948>



Plug-in bridge, pitch: 10.2 mm, number of positions: 5, color: red

i Max. current carrying capacity: 57 A

FBS 5-10 BU - Plug-in bridge

1040620

<https://www.phoenixcontact.com/us/products/1040620>



Plug-in bridge, pitch: 10.2 mm, number of positions: 5, color: blue

i Max. current carrying capacity: 57 A

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

FBS 2-10 - Plug-in bridge

3005947

<https://www.phoenixcontact.com/us/products/3005947>



Plug-in bridge, pitch: 10.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 50 A

TCP 0,1A - Thermal device circuit breaker

0712107

<https://www.phoenixcontact.com/us/products/0712107>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 0,25A - Thermal device circuit breaker

0712123

<https://www.phoenixcontact.com/us/products/0712123>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 0,5A - Thermal device circuit breaker

0712152

<https://www.phoenixcontact.com/us/products/0712152>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 1A - Thermal device circuit breaker

0712194

<https://www.phoenixcontact.com/us/products/0712194>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 2A - Thermal device circuit breaker

0712217

<https://www.phoenixcontact.com/us/products/0712217>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 3A - Thermal device circuit breaker

0712233

<https://www.phoenixcontact.com/us/products/0712233>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 4A - Thermal device circuit breaker

0712259

<https://www.phoenixcontact.com/us/products/0712259>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 6A - Thermal device circuit breaker

0712275

<https://www.phoenixcontact.com/us/products/0712275>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 8A - Thermal device circuit breaker

0712291

<https://www.phoenixcontact.com/us/products/0712291>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

PT 10-FSI/C-LED 48 - Fuse modular terminal block

1088501

<https://www.phoenixcontact.com/us/products/1088501>



TCP 10A - Thermal device circuit breaker

0712314

<https://www.phoenixcontact.com/us/products/0712314>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 32DC/5A M - Thermal device circuit breaker

1499963

<https://www.phoenixcontact.com/us/products/1499963>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 32DC/6A M - Thermal device circuit breaker

1499965

<https://www.phoenixcontact.com/us/products/1499965>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

TCP 32DC/7,5A M - Thermal device circuit breaker

1499966

<https://www.phoenixcontact.com/us/products/1499966>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 32DC/10A M - Thermal device circuit breaker

1499967

<https://www.phoenixcontact.com/us/products/1499967>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

TCP 32DC/15A M - Thermal device circuit breaker

1499968

<https://www.phoenixcontact.com/us/products/1499968>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 32DC/20A M - Thermal device circuit breaker

1499969

<https://www.phoenixcontact.com/us/products/1499969>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

TCP 32DC/25A M - Thermal device circuit breaker

1499972

<https://www.phoenixcontact.com/us/products/1499972>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

TCP 32DC/30A M - Thermal device circuit breaker

1499987

<https://www.phoenixcontact.com/us/products/1499987>



Thermal device circuit breaker, number of positions: 1, mounting type: on base element

LPS-10/E - Service connector

3270580

<https://www.phoenixcontact.com/us/products/3270580>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

LPS-10 - Service connector

3270581

<https://www.phoenixcontact.com/us/products/3270581>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

LPO 10/E - Pick-off plug

3270528

<https://www.phoenixcontact.com/us/products/3270528>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

LPO 10 - Pick-off plug

3270529

<https://www.phoenixcontact.com/us/products/3270529>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

TCP 10/16A - Thermal device circuit breaker

1324402

<https://www.phoenixcontact.com/us/products/1324402>



Thermal miniature circuit breaker, can be plugged into PT 10-FSI/C Push-in fuse terminal block.

PT 10-FSI/C-LED 48 - Fuse modular terminal block

1088501

<https://www.phoenixcontact.com/us/products/1088501>



TCP 10/20A - Thermal device circuit breaker

1324401

<https://www.phoenixcontact.com/us/products/1324401>



Thermal miniature circuit breaker, can be plugged into PT 10-FSI/C Push-in fuse terminal block.

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

ZBF10:UNBEDRUCKT - Zack Marker strip, flat

0809997

<https://www.phoenixcontact.com/us/products/0809997>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

ZBF10 CUS - Zack Marker strip, flat

0825031

<https://www.phoenixcontact.com/us/products/0825031>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

ZBF10,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0810009

<https://www.phoenixcontact.com/us/products/0810009>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

ZBF10,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0810025

<https://www.phoenixcontact.com/us/products/0810025>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

UC-TMF 10 - Marker for terminal blocks

0818124

<https://www.phoenixcontact.com/us/products/0818124>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48

UC-TMF 10 CUS - Marker for terminal blocks

0824662

<https://www.phoenixcontact.com/us/products/0824662>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

UCT-TMF 10 - Marker for terminal blocks

0829204

<https://www.phoenixcontact.com/us/products/0829204>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.4 x 4.7 mm, Number of individual labels: 36

UCT-TMF 10 CUS - Marker for terminal blocks

0829679

<https://www.phoenixcontact.com/us/products/0829679>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.4 x 4.7 mm, Number of individual labels: 36

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501

<https://www.phoenixcontact.com/us/products/1088501>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

PT 10-FSI/C-LED 48 - Fuse modular terminal block



1088501


<https://www.phoenixcontact.com/us/products/1088501>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



SZF 3-1,0X5,5 - Screwdriver

1206612

<https://www.phoenixcontact.com/us/products/1206612>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 1.0 x 5.5 x 150 mm, 2-component grip, with non-slip grip



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com