

1090619

https://www.phoenixcontact.com/us/products/1090619

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 6,3 x 32, nom. voltage: 250 V, nominal current: 10 A, connection method: Push-in connection, cross section: 0. 5 mm^2 - 16 mm^2 , color: gray

Commercial data

Item number	1090619
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BE22
Product key	BE2234
GTIN	4055626897998
Weight per piece (including packing)	40.12 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85369095
Country of origin	CN



1090619

https://www.phoenixcontact.com/us/products/1090619

Technical data

Notes

_			
G	~ ~	-	
		e	

Note	The current is determined by the fuse used, the voltage by the
	fuse or selected light indicator.

Product properties

Product type	Fuse terminal block	
Number of connections	2	
Number of rows	1	
Insulation characteristics		
Overvoltage category	III	

3

Degree of pollution Electrical properties

Fuse type	Glass / ceramics /
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.82 W
Fuse	G / 6.3 x 32

Connection data

Number of connections per level	2
Nominal cross section	10 mm²
Rated cross section AWG	6
Stripping length	18 mm 20 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm² 16 mm²
Cross section AWG	20 6 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm² 10 mm²
Conductor cross section, flexible [AWG]	20 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm² 10 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm² 10 mm²
Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve)	0.5 mm² 4 mm²
Nominal current	10 A
Maximum load current	10 A
Nominal voltage	250 V

Connection cross sections directly pluggable

* * **	
Conductor cross section rigid	0.5 mm² 16 mm²
Conductor cross section flexible	1 mm² 16 mm²



1090619

https://www.phoenixcontact.com/us/products/1090619

Conductor cross-section flexible (ferrule without plastic sleeve)	1 mm² 10 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	1 mm² 10 mm²
Conductor cross section flexible, with TWIN ferrule with plastic sleeve	0.5 mm² 4 mm²

Dimensions

Width	10.2 mm
Height	88.9 mm
Depth	77.3 mm
Depth on NS 35/7,5	78.3 mm
Depth on NS 35/15	84.8 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

	l
Open side panel	No
•	

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz to } f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s²)²/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed



1090619

https://www.phoenixcontact.com/us/products/1090619

Shocks

DE 0115-200):2008-03
(pos. and neg.)
(Operating temperature range incl. self-heating; m operating temperature, see RTI Elec.)
•

Ambient temperature (operation)	-60 $^{\circ}\text{C}$ 110 $^{\circ}\text{C}$ (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 $^{\circ}\text{C}$ 60 $^{\circ}\text{C}$ (for a short time, not exceeding 24 h, -60 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C})$
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (operation)	20 % 90 %
Permissible humidity (storage/transport)	30 % 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3




1090619

https://www.phoenixcontact.com/us/products/1090619

Drawings

Circuit diagram

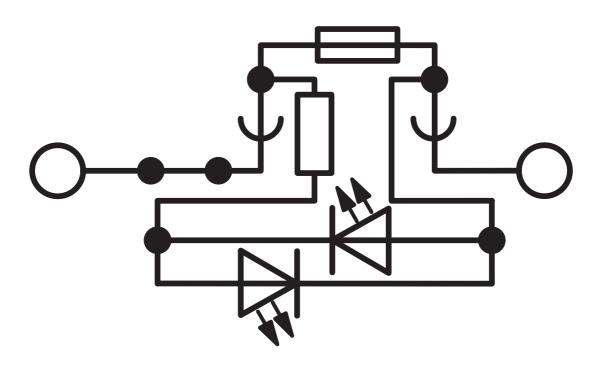



1090619

https://www.phoenixcontact.com/us/products/1090619

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1090619

CSA Approval ID: 158887				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group B				
	300 V	10 A	20 - 6	-
Use group C				
	300 V	10 A	20 - 6	-
Use group D				
	600 V	5 A	20 - 6	-

EAC	EAC
LIIL	Approval ID: RU C-DE.BL08.B.00644

c 912 us	cULus Recognized
	Approval ID: E60425

c 911 us	cULus Recognized
	Approval ID: E60425





1090619

https://www.phoenixcontact.com/us/products/1090619

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113
ETIM	
ETIM 9.0	EC000899
UNSPSC	

39121400



1090619

https://www.phoenixcontact.com/us/products/1090619

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1090619

https://www.phoenixcontact.com/us/products/1090619

Accessories



Note: Applying some accessories below might limit this product.

FBS 5-10 - Plug-in bridge

3005948

https://www.phoenixcontact.com/us/products/3005948



Plug-in bridge, pitch: 10.2 mm, number of positions: 5, color: red

Max. current carrying capacity: 57 A

FBS 5-10 BU - Plug-in bridge

1040620

https://www.phoenixcontact.com/us/products/1040620



Plug-in bridge, pitch: 10.2 mm, number of positions: 5, color: blue

1 Max. current carrying capacity: 57 A



1090619

https://www.phoenixcontact.com/us/products/1090619

FBS 2-10 - Plug-in bridge

3005947

https://www.phoenixcontact.com/us/products/3005947



Plug-in bridge, pitch: 10.2 mm, number of positions: 2, color: red



Max. current carrying capacity: 50 A

NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5





1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730




DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602




DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored



1090619

https://www.phoenixcontact.com/us/products/1090619

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver



1090619

https://www.phoenixcontact.com/us/products/1090619

ZBF10:UNBEDRUCKT - Zack Marker strip, flat

0809997

https://www.phoenixcontact.com/us/products/0809997



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

ZBF10 CUS - Zack Marker strip, flat

0825031

https://www.phoenixcontact.com/us/products/0825031



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10



1090619

https://www.phoenixcontact.com/us/products/1090619

ZBF10,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0810009

https://www.phoenixcontact.com/us/products/0810009



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10

ZBF10,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0810025

https://www.phoenixcontact.com/us/products/0810025



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10 mm, lettering field size: 5.15 x 10 mm, Number of individual labels: 10



1090619

https://www.phoenixcontact.com/us/products/1090619

UC-TMF 10 - Marker for terminal blocks

0818124

https://www.phoenixcontact.com/us/products/0818124



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48

UC-TMF 10 CUS - Marker for terminal blocks

0824662

https://www.phoenixcontact.com/us/products/0824662



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 5.1 mm, Number of individual labels: 48



1090619

https://www.phoenixcontact.com/us/products/1090619

UCT-TMF 10 - Marker for terminal blocks

0829204

https://www.phoenixcontact.com/us/products/0829204



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.4 x 4.7 mm, Number of individual labels: 36

UCT-TMF 10 CUS - Marker for terminal blocks

0829679

https://www.phoenixcontact.com/us/products/0829679



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 10.2 mm, lettering field size: $9.4 \times 4.7 \text{ MM}$, Number of individual labels: 36



1090619

https://www.phoenixcontact.com/us/products/1090619

ZB 10:UNBEDRUCKT - Zack marker strip

1053001

https://www.phoenixcontact.com/us/products/1053001



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10.5 x 10.15 mm, Number of individual labels: 10

ZB 10 CUS - Zack marker strip

0824941

https://www.phoenixcontact.com/us/products/0824941



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: $10,15 \times 10,5 \text{ mm}$, Number of individual labels: 10



1090619

https://www.phoenixcontact.com/us/products/1090619

ZB10,LGS:FORTL.ZAHLEN - Zack marker strip

1053014

https://www.phoenixcontact.com/us/products/1053014



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10.15×10.5 mm, Number of individual labels: 10

ZB10,QR:FORTL.ZAHLEN - Zack marker strip

1053027

https://www.phoenixcontact.com/us/products/1053027



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 \dots 10, 11 \dots 20, etc. up to 91 \dots 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10



1090619

https://www.phoenixcontact.com/us/products/1090619

ZB10,LGS:L1-N,PE - Marker for terminal blocks

1053412

https://www.phoenixcontact.com/us/products/1053412



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

ZB10,LGS:U-N - Marker for terminal blocks

1053438

https://www.phoenixcontact.com/us/products/1053438



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10



1090619

https://www.phoenixcontact.com/us/products/1090619

UC-TM 10 - Marker for terminal blocks

0818069

https://www.phoenixcontact.com/us/products/0818069



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

UC-TM 10 CUS - Marker for terminal blocks

0824605

https://www.phoenixcontact.com/us/products/0824605



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48



1090619

https://www.phoenixcontact.com/us/products/1090619

UCT-TM 10 - Marker for terminal blocks

0829142

https://www.phoenixcontact.com/us/products/0829142



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

UCT-TM 10 CUS - Marker for terminal blocks

0829623

https://www.phoenixcontact.com/us/products/0829623



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36



1090619

https://www.phoenixcontact.com/us/products/1090619

CLIPFIX 35 - End bracket

3022218

https://www.phoenixcontact.com/us/products/3022218



Quick mounting end clamp for NS 35/7.5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

https://www.phoenixcontact.com/us/products/3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray



1090619

https://www.phoenixcontact.com/us/products/1090619

E/NS 35 N - End bracket

0800886

https://www.phoenixcontact.com/us/products/0800886



End clamp, width: 9.5 mm, color: gray

SZF 3-1,0X5,5 - Screwdriver

1206612

https://www.phoenixcontact.com/us/products/1206612



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: $1.0 \times 5.5 \times 150$ mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com