

1106768

https://www.phoenixcontact.com/us/products/1106768

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Knife-disconnect terminal block, with actuation latch, red disconnect knife, and test socket screws for insertion of test plugs, nom. voltage: 500 V, nominal current: 20 A, connection method: Screw connection, Rated cross section: 2.5 mm $^2$ , cross section: 0.14 mm $^2$  - 6 mm $^2$ , mounting: NS 35/7,5, NS 35/15, color: blue

### Your advantages

· Compact design and high current carrying capacity of 20 A

#### Commercial data

Item number	1106768
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	BE01
Product key	BE1131
GTIN	4063151000509
Weight per piece (including packing)	13.882 g
Weight per piece (excluding packing)	13.882 g
Customs tariff number	85369010
Country of origin	DE



1106768

https://www.phoenixcontact.com/us/products/1106768

### Technical data

### Product properties

Product type	Disconnect terminal block
Area of application	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1
Sulation characteristics  Overvoltage category	III
Overvoltage category	
Overvoltage category  Degree of pollution	

#### Connection data

Number of connections per level	2
Nominal cross section	4 mm²

### Level 1 above 1 below 1

M3 0.6 0.8 Nm
0.6 0.8 Nm
0.0 0.0 (4)11
9 mm
A4
IEC 60947-7-1
0.14 mm² 6 mm²
26 10 (converted acc. to IEC)
0.14 mm² 6 mm²
26 12 (converted acc. to IEC)
0.14 mm² 4 mm²
0.14 mm² 4 mm²
0.14 mm² 1.5 mm²
0.14 mm² 1.5 mm²
0.14 mm² 1.5 mm²
0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
20 A
20 A (with 6 mm² conductor cross section)
500 V



1106768

https://www.phoenixcontact.com/us/products/1106768

#### **Dimensions**

Width	6.2 mm
Height	57.8 mm
Depth on NS 35/7,5	49.1 mm
Depth on NS 35/15	56.6 mm

### Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	1
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

### Mechanical properties

#### Mechanical data

Open side panel	No

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-60 °C 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (operation)	20 % 90 %
Permissible humidity (storage/transport)	30 % 70 %

### Standards and regulations

Connection in acc. with standard IEC 60947-7-1
--

### Mounting

Mounting type	NS 35/7,5
	NS 35/15




1106768

https://www.phoenixcontact.com/us/products/1106768

### Drawings

Circuit diagram

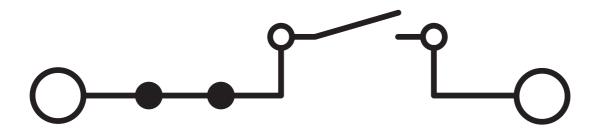



1106768

https://www.phoenixcontact.com/us/products/1106768

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1106768

cULus Recogni Approval ID: E60425				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	16 A	26 - 10	-
Multi-conductor connection	300 V	16 A	26 - 14	-
Use group C				
	300 V	16 A	26 - 10	-
Multi-conductor connection	300 V	16 A	26 - 14	-

CSA Approval ID: 13631				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	16 A	26 - 10	-
Use group C				
	300 V	16 A	26 - 10	-
Use group D				
	600 V	5 A	26 - 10	-

EAC
Approval ID: RU C-DE.BL08.B.00534



1106768

https://www.phoenixcontact.com/us/products/1106768

### Classifications

UNSPSC 21.0

#### **ECLASS**

	ECLASS-11.0	27141126	
	ECLASS-12.0	27141126	
	ECLASS-13.0	27250108	
ETIM			
	ETIM 9.0	EC000902	
UNSPSC			

39121400



1106768

https://www.phoenixcontact.com/us/products/1106768

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8866dc89-f9e0-40e7-a16a-b2ac0600b596



1106768

https://www.phoenixcontact.com/us/products/1106768

#### Accessories



Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

https://www.phoenixcontact.com/us/products/3030336



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 20 A

### FBS 3-6 - Plug-in bridge

3030242

https://www.phoenixcontact.com/us/products/3030242



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### FBS 4-6 - Plug-in bridge

3030255

https://www.phoenixcontact.com/us/products/3030255



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 20 A

### FBS 5-6 - Plug-in bridge

3030349

https://www.phoenixcontact.com/us/products/3030349



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### FBS 6-6 - Plug-in bridge

1008238

https://www.phoenixcontact.com/us/products/1008238



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

Max. current carrying capacity: 20 A

#### FBS 10-6 - Plug-in bridge

3030271

https://www.phoenixcontact.com/us/products/3030271



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### FBS 20-6 - Plug-in bridge

3030365

https://www.phoenixcontact.com/us/products/3030365



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red



1 Max. current carrying capacity: 20 A

#### FBS 50-6 - Plug-in bridge

3032224

https://www.phoenixcontact.com/us/products/3032224



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBSR 2-6 - Plug-in bridge

3033715

https://www.phoenixcontact.com/us/products/3033715



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 20 A

### FBSR 3-6 - Plug-in bridge

3001594

https://www.phoenixcontact.com/us/products/3001594



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### FBSR 4-6 - Plug-in bridge

3001595

https://www.phoenixcontact.com/us/products/3001595



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

1 Max. current carrying capacity: 20 A

### FBSR 5-6 - Plug-in bridge

3001596

https://www.phoenixcontact.com/us/products/3001596



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBSR 10-6 - Plug-in bridge

3033716

https://www.phoenixcontact.com/us/products/3033716



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

1 Max. current carrying capacity: 20 A

#### FBSRH 2-6 - Short-circuit connector

3033812

https://www.phoenixcontact.com/us/products/3033812



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBS 2-6 BU - Plug-in bridge

3036932

https://www.phoenixcontact.com/us/products/3036932



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

Max. current carrying capacity: 20 A

### FBS 3-6 BU - Plug-in bridge

3036945

https://www.phoenixcontact.com/us/products/3036945



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBS 4-6 BU - Plug-in bridge

3036958

https://www.phoenixcontact.com/us/products/3036958



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

1 Max. current carrying capacity: 20 A

### FBS 5-6 BU - Plug-in bridge

3036961

https://www.phoenixcontact.com/us/products/3036961



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBS 10-6 BU - Plug-in bridge

3032198

https://www.phoenixcontact.com/us/products/3032198



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue

1 Max. current carrying capacity: 20 A

#### FBS 20-6 BU - Plug-in bridge

3032208

https://www.phoenixcontact.com/us/products/3032208



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



1106768

https://www.phoenixcontact.com/us/products/1106768

### FBS 50-6 BU - Plug-in bridge

3032211

https://www.phoenixcontact.com/us/products/3032211



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

1 Max. current carrying capacity: 20 A

#### RB ST 10-(2,5/4) - Reducing bridge

3030873

https://www.phoenixcontact.com/us/products/3030873



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

### RB UT 10-(2,5/4) - Reducing bridge

3047060

https://www.phoenixcontact.com/us/products/3047060



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

Max. current carrying capacity: 40 A

#### RB UT 35-(2,5/4) - Reducing bridge

3047277

https://www.phoenixcontact.com/us/products/3047277



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

### RB UT 16-(2,5/4) - Reducing bridge

3047073

https://www.phoenixcontact.com/us/products/3047073



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 31 mm, color: red

Max. current carrying capacity: 40 A

### RB UT 6-(2,5/4) - Reducing bridge

3047251

https://www.phoenixcontact.com/us/products/3047251



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### LPS-6/E - Service connector

3270540

https://www.phoenixcontact.com/us/products/3270540



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section:  $2.5 \, \text{mm}^2$ , cross section:  $0.14 \, \text{mm}^2$ -  $4 \, \text{mm}^2$ , color: red

#### LPS-6 - Service connector

3270541

https://www.phoenixcontact.com/us/products/3270541



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section:  $2.5 \, \text{mm}^2$ , cross section:  $0.14 \, \text{mm}^2$ -  $4 \, \text{mm}^2$ , color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### LPO 4/E - Pick-off plug

3270519

https://www.phoenixcontact.com/us/products/3270519



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

#### LPO 4 - Pick-off plug

3270522

https://www.phoenixcontact.com/us/products/3270522



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray



1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

#### NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

#### NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

#### NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

#### NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored



1106768

https://www.phoenixcontact.com/us/products/1106768

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



#### NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver




1106768

https://www.phoenixcontact.com/us/products/1106768

### NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

#### NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white




1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

#### NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



1106768

https://www.phoenixcontact.com/us/products/1106768

### NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

#### NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

#### NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15





1106768

https://www.phoenixcontact.com/us/products/1106768

#### NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

https://www.phoenixcontact.com/us/products/1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



1106768

https://www.phoenixcontact.com/us/products/1106768

#### ZB 6 CUS - Zack marker strip

0824992

https://www.phoenixcontact.com/us/products/0824992



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

#### ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

https://www.phoenixcontact.com/us/products/1051016



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1  $\dots$  10, 11  $\dots$  20, etc. up to 491  $\dots$  500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10



1106768

https://www.phoenixcontact.com/us/products/1106768

#### ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

https://www.phoenixcontact.com/us/products/1051029



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

#### ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

https://www.phoenixcontact.com/us/products/1051032



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



1106768

https://www.phoenixcontact.com/us/products/1106768

#### ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

https://www.phoenixcontact.com/us/products/1051414



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

#### ZB 6,LGS:U-N - Marker for terminal blocks

1051430

https://www.phoenixcontact.com/us/products/1051430



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width:  $6.2 \, \text{mm}$ , lettering field size:  $6.15 \, x \, 10$ .  $5 \, \text{mm}$ , Number of individual labels:  $10 \, \text{mm}$ 



1106768

https://www.phoenixcontact.com/us/products/1106768

#### UC-TM 6 - Marker for terminal blocks

0818085

https://www.phoenixcontact.com/us/products/0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

#### UC-TM 6 CUS - Marker for terminal blocks

0824589

https://www.phoenixcontact.com/us/products/0824589



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80



1106768

https://www.phoenixcontact.com/us/products/1106768

#### UCT-TM 6 - Marker for terminal blocks

0828736

https://www.phoenixcontact.com/us/products/0828736



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

#### UCT-TM 6 CUS - Marker for terminal blocks

0829602

https://www.phoenixcontact.com/us/products/0829602



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60



1106768

https://www.phoenixcontact.com/us/products/1106768

#### MPS-MT - Test plug

0201744

https://www.phoenixcontact.com/us/products/0201744



Test plug, with solder connection up to 1  $\mbox{mm}^2$  conductor cross section, number of positions: 1, color: gray

#### MPS-IH WH - Insulating sleeve

0201663

https://www.phoenixcontact.com/us/products/0201663

Insulating sleeve, color: white





1106768

https://www.phoenixcontact.com/us/products/1106768

### MPS-IH RD - Insulating sleeve

0201676

https://www.phoenixcontact.com/us/products/0201676

Insulating sleeve, color: red



#### MPS-IH BU - Insulating sleeve

0201689

https://www.phoenixcontact.com/us/products/0201689

Insulating sleeve, color: blue





1106768

https://www.phoenixcontact.com/us/products/1106768

### MPS-IH YE - Insulating sleeve

0201692

https://www.phoenixcontact.com/us/products/0201692

Insulating sleeve, color: yellow



#### MPS-IH GN - Insulating sleeve

0201702

https://www.phoenixcontact.com/us/products/0201702

Insulating sleeve, color: green





1106768

https://www.phoenixcontact.com/us/products/1106768

### MPS-IH GY - Insulating sleeve

0201728

https://www.phoenixcontact.com/us/products/0201728

Insulating sleeve, color: gray



#### MPS-IH BK - Insulating sleeve

0201731

https://www.phoenixcontact.com/us/products/0201731

Insulating sleeve, color: black





1106768

https://www.phoenixcontact.com/us/products/1106768

### PAI-4-FIX-5/6 BU - Test adapter

3035975

https://www.phoenixcontact.com/us/products/3035975



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

#### PAI-4-FIX-5/6 OG - Test adapter

3035974

https://www.phoenixcontact.com/us/products/3035974





1106768

https://www.phoenixcontact.com/us/products/1106768

#### PAI-4-FIX-5/6 YE - Test adapter

3035977

https://www.phoenixcontact.com/us/products/3035977



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

#### PAI-4-FIX-5/6 RD - Test adapter

3035976

https://www.phoenixcontact.com/us/products/3035976





1106768

https://www.phoenixcontact.com/us/products/1106768

#### PAI-4-FIX-5/6 GN - Test adapter

3035978

https://www.phoenixcontact.com/us/products/3035978



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

#### PAI-4-FIX-5/6 BK - Test adapter

3035980

https://www.phoenixcontact.com/us/products/3035980





1106768

https://www.phoenixcontact.com/us/products/1106768

#### PAI-4-FIX-5/6 GY - Test adapter

3035982

https://www.phoenixcontact.com/us/products/3035982



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

#### PAI-4-FIX-5/6 VT - Test adapter

3035979

https://www.phoenixcontact.com/us/products/3035979





1106768

https://www.phoenixcontact.com/us/products/1106768

### PAI-4-FIX-5/6 BN - Test adapter

3035981

https://www.phoenixcontact.com/us/products/3035981



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

#### PAI-4-FIX-5/6 WH - Test adapter

3035983

https://www.phoenixcontact.com/us/products/3035983





1106768

https://www.phoenixcontact.com/us/products/1106768

#### PS-6 - Test plug

3030996

https://www.phoenixcontact.com/us/products/3030996



Test plug, Modular test plug, number of positions: 1, color: red

#### PS-6/2,3MM RD - Test plug

3038736

https://www.phoenixcontact.com/us/products/3038736



Test plug, number of positions: 1, color: red



1106768

https://www.phoenixcontact.com/us/products/1106768

#### CLIPFIX 35 - End bracket

3022218

https://www.phoenixcontact.com/us/products/3022218



Quick mounting end clamp for NS 35/7.5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

#### CLIPFIX 35-5 - End bracket

3022276

https://www.phoenixcontact.com/us/products/3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray



1106768

https://www.phoenixcontact.com/us/products/1106768

#### E/NS 35 N - End bracket

0800886

https://www.phoenixcontact.com/us/products/0800886



End clamp, width: 9.5 mm, color: gray

#### PAI-4-N GY - Test adapter

3032871

https://www.phoenixcontact.com/us/products/3032871





1106768

https://www.phoenixcontact.com/us/products/1106768

SZS 0,6X3,5 - Screwdriver

1205053

https://www.phoenixcontact.com/us/products/1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size:  $0.6 \times 3.5 \times 100$  mm, 2-component grip, with non-slip grip

#### SZG 0,6X3,5 VDE - Screwdriver

1205121

https://www.phoenixcontact.com/us/products/1205121



Screwdriver, slot-headed, graded, for test socket screws, size:  $0.6 \times 3.5 \times 100$  mm, 2-component grip, with non-slip grip



1106768

https://www.phoenixcontact.com/us/products/1106768

X-PEN 0,35 - Marker pen

0811228

https://www.phoenixcontact.com/us/products/0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness  $0.35\ \mathrm{mm}$ 

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com