

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Mini feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, number of connections: 2, connection method: Screw connection, 1 level, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting type: NS 15, color: gray

Your advantages

- Clear arrangement thanks to marking of all terminal points
- Space saving thanks to compact design and mounting option on a 15 mm DIN rail
- Easy potential distribution thanks to standardized plug-in bridges

Commercial data

Item number	1413010
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1261
Catalog page	Page 522 (CL1-2011)
GTIN	4017918021092
Weight per piece (including packing)	6.743 g
Weight per piece (excluding packing)	6.718 g
Customs tariff number	85369010
Country of origin	PL

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Technical data

Product properties

Product type	Miniature terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1 level

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	8 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 1.5 mm ²
Cross-section with insertion bridge, rigid	2.5 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	24 A
Maximum load current	32 A (with 4 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	2.5 mm ²

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Dimensions

Width	5.2 mm
End cover width	2.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 2.5 mm ²	0.3 kA
Short-time withstand current 4 mm ²	0.48 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 15
Test force setpoint	1 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
----------------	--------

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Revolutions	135
Conductor cross section/weight	0.2 mm ² / 0.2 kg
	2.5 mm ² / 0.7 kg
	4 mm ² / 0.9 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting


Mounting type	NS 15
---------------	-------

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>

Drawings

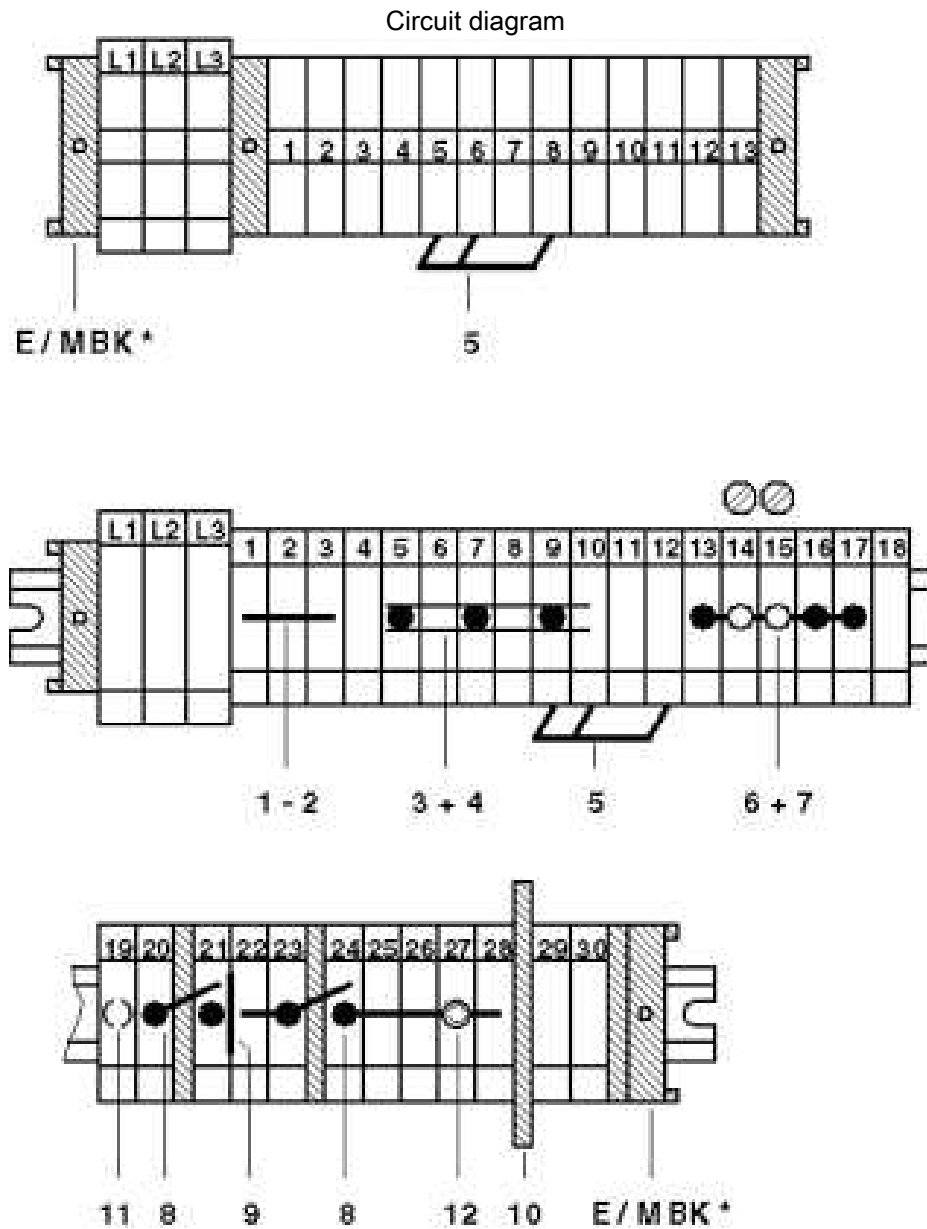

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



Circuit diagram



MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413010>

DNV

Approval ID: TAE00001CT



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	150 V	25 A	28 - 12	-



EAC

Approval ID: RU C-DE.BL08.B.00534



cULus Recognized

Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	600 V	20 A	28 - 12	-
Use group C				
	600 V	20 A	28 - 12	-

ClassNK

NK

Approval ID: 09 ME 142

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

Accessories



Note: Applying some accessories below might limit this product.

FBRI 10-5 N - Fixed bridge

2770642

<https://www.phoenixcontact.com/us/products/2770642>



Fixed bridge, pitch: 5.2 mm, number of positions: 10, color: silver



Max. current carrying capacity: 26 A

EBL 10- 5 - Insertion bridge

2303132

<https://www.phoenixcontact.com/us/products/2303132>



Insertion bridge, pitch: 5.2 mm, number of positions: 10, color: gray



Max. current carrying capacity: 24 A

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



SBRN 2-7 - Switching jumper

1413230

<https://www.phoenixcontact.com/us/products/1413230>



Switching jumper, pitch: 7 mm, number of positions: 2, color: silver

 Max. current carrying capacity: 24 A

D-MBK 3/5 - End cover

1413023

<https://www.phoenixcontact.com/us/products/1413023>



End cover, width: 2.5 mm, height: 30.2 mm, color: gray

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



FB-150 METER - Fixed bridge

0201595

<https://www.phoenixcontact.com/us/products/0201595>



Cross connection rail, for fixed bridging of identical inputs and outputs, made of Cu, nickel-plated, 1 m long

RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/us/products/2770215>



Separating plate, depth: 16 mm, width: 0.5 mm, height: 14 mm, color: gray

ATP-MBK - Partition plate

1413227

<https://www.phoenixcontact.com/us/products/1413227>



Partition plate, depth: 30.5 mm, width: 2.5 mm, height: 42.5 mm, color: gray

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



BN-ZB 5,2/WH CUS - Marker pin Zack strip

0824271

<https://www.phoenixcontact.com/us/products/0824271>



Marker pin Zack strip, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: plug in, for terminal block width: 5.2 mm, lettering field size: 4 x 4 mm, Number of individual labels: 10

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

MBK 3 - Mini feed-through terminal block



1413010

<https://www.phoenixcontact.com/us/products/1413010>

NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/us/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/us/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/us/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/us/products/1204096>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

MBK 3 - Mini feed-through terminal block




1413010

<https://www.phoenixcontact.com/us/products/1413010>

E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>



End clamp, width: 6.2 mm, color: gray

E/MK - End bracket

1421633

<https://www.phoenixcontact.com/us/products/1421633>



End clamp, width: 6.2 mm, color: gray

MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>




E/MK 1 - End bracket

1421659

<https://www.phoenixcontact.com/us/products/1421659>

End clamp width: 6 mm, color: gray



PSBJ 3/13/4 - Test plug strip

0201304

<https://www.phoenixcontact.com/us/products/0201304>

Test plug strip, number of positions: 1, color: silver



MBK 3 - Mini feed-through terminal block

1413010

<https://www.phoenixcontact.com/us/products/1413010>



PSB 3/10/4 - Test plug strip

0601292

<https://www.phoenixcontact.com/us/products/0601292>

Test plug strip, number of positions: 1, color: silver



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com