

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Mini feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw connection, 1st and 2nd level, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting type: NS 15, NS 35/7,5, NS 35/15, color: gray

Your advantages

- Fixed bridges and test sockets can be used on both levels
- Space saving thanks to compact design and mounting option on a 15 mm DIN rail
- Clear arrangement thanks to marking of all terminal points
- Easy potential distribution thanks to standardized plug-in bridges

Commercial data

Item number	1414064
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1264
Catalog page	Page 560 (C-1-2019)
GTIN	4017918021313
Weight per piece (including packing)	11.384 g
Weight per piece (excluding packing)	10.413 g
Customs tariff number	85369010
Country of origin	CN

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Technical data

Product properties

Product type	Miniature terminal block
Number of connections	4
Number of rows	2
Potentials	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1st and 2nd level

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	7 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 1.5 mm ²
Cross-section with insertion bridge, rigid	2.5 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1 mm ²
Nominal current	24 A
Maximum load current	24 A (with 4 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	2.5 mm ²

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Ex data

Rated data (ATEX/IECEx)

Identification	Ex II 2 G Ex eb IIC Gb
Operating temperature range	-50 °C ... 110 °C
Ex-certified accessories	1413052 D-MBKKB 2,5
	1413065 DP-MBKKB 2,5
	1205053 SZS 0,6X3,5
	3022218 CLIPFIX 35
	1401637 E/MBK
List of bridges	Fixed bridge / FBRNI 2-5 N / 3000175
	Fixed bridge / FBRNI 3-5 N / 3000162
	Fixed bridge / FBRNI 4-5 N / 3000159
	Fixed bridge / FBRNI 5-5 N / 3000146
	Fixed bridge / FBRNI 6-5 N / 3000133
	Fixed bridge / FBRNI 7-5 N / 3000230
	Fixed bridge / FBRNI 8-5 N / 3000243
	Fixed bridge / FBRNI 9-5 N / 3000298
	Fixed bridge / FBRNI 10-5 N / 2770639
	Fixed bridge / FBRNI 20-5 N / 3000609
Bridge data	19 A / 2.5 mm ²
Ex temperature increase	40 K (21 A / 2.5 mm ²)
Rated voltage	275 V
for bridging with bridge	275 V
Rated insulation voltage	250 V
output	(Permanent)

Ex level General

Rated current	21 A
Maximum load current	26 A

Ex connection data General

Torque range	0.5 Nm ... 0.6 Nm
Nominal cross section	2.5 mm ²
Rated cross section AWG	14
Connection capacity rigid	0.2 mm ² ... 4 mm ²
Connection capacity AWG	24 ... 12
Connection capacity flexible	0.2 mm ² ... 2.5 mm ²
Connection capacity AWG	24 ... 14
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with the same cross-section AWG rigid	24 ... 16
2 conductors with same cross section, stranded	0.2 mm ² ... 1.5 mm ²
2 conductors with the same cross-section AWG flexible	24 ... 16
output	(Permanent)

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Ex level Level 1

Contact resistance	0.5 mΩ
output	(Permanent)

Ex level Level 2

Contact resistance	0.4 mΩ
--------------------	--------

Dimensions

Width	5.2 mm
End cover width	2.5 mm
Height	62 mm
Depth on NS 15	47.5 mm
Depth on NS 35/7,5	48 mm
Depth on NS 35/15	55.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 2.5 mm ²	0.3 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 35/NS 15
Test force setpoint	1 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.2 mm ² / 0.2 kg
	2.5 mm ² / 0.7 kg
	4 mm ² / 0.9 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 15
	NS 35/7,5
	NS 35/15


MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>

Drawings

Circuit diagram

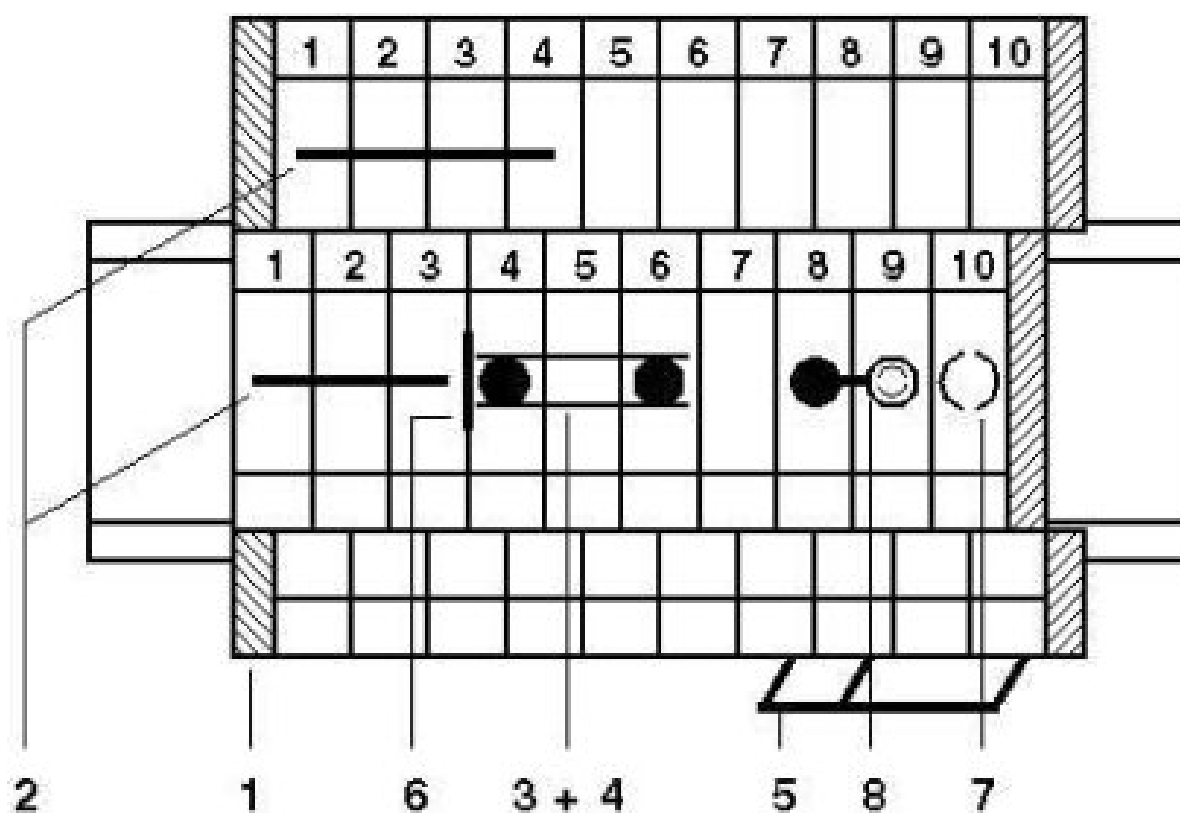


MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Circuit diagram



MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414064>

DNV

Approval ID: TAE00001CT



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	300 V	20 A	28 - 12	-



cULus Recognized

Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	20 A	30 - 12	-
Use group C				
	300 V	20 A	30 - 12	-



ATEX

Approval ID: KEMA 03ATEX2082 U



EAC Ex

Approval ID: RU C-DE.HA91.B.00066



IECEx

Approval ID: IECEx KEM 07.0018U



CCC

Approval ID: 2020322313000629

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250102

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

Accessories

i Note: Applying some accessories below might limit this product.

FBRNI 2-5 N - Fixed bridge

3000175

<https://www.phoenixcontact.com/us/products/3000175>




Fixed bridge, pitch: 5 mm, number of positions: 2, color: silver

i Max. current carrying capacity: 22 A

FBRNI 3-5 N - Fixed bridge

3000162

<https://www.phoenixcontact.com/us/products/3000162>



Fixed bridge, pitch: 5 mm, number of positions: 3, color: silver

i Max. current carrying capacity: 22 A

MBKKB 2,5 - Mini feed-through terminal block

1414064


<https://www.phoenixcontact.com/us/products/1414064>



FBRNI 4-5 N - Fixed bridge

3000159

<https://www.phoenixcontact.com/us/products/3000159>




Fixed bridge, pitch: 5 mm, number of positions: 4, color: silver

 Max. current carrying capacity: 22 A

FBRNI 10-5 N - Fixed bridge

2770639

<https://www.phoenixcontact.com/us/products/2770639>



Fixed bridge, pitch: 5.2 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 22 A

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



FBRNI 20-5 N - Fixed bridge

3000609

<https://www.phoenixcontact.com/us/products/3000609>



Fixed bridge, number of positions: 20, color: silver

 Max. current carrying capacity: 22 A

EB 2- 5 - Insertion bridge

1401158

<https://www.phoenixcontact.com/us/products/1401158>



Insertion bridge, pitch: 5 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 20 A

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

EB 3- 5 - Insertion bridge

1401145

<https://www.phoenixcontact.com/us/products/1401145>

Insertion bridge, pitch: 5 mm, number of positions: 3, color: gray



 Max. current carrying capacity: 20 A

EB 10- 5 - Insertion bridge

1401132

<https://www.phoenixcontact.com/us/products/1401132>

Insertion bridge, pitch: 5.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 20 A

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



SBRN 2-7 - Switching jumper

1413230

<https://www.phoenixcontact.com/us/products/1413230>



Switching jumper, pitch: 7 mm, number of positions: 2, color: silver

DP-MBKKB 2,5 - Spacer plate

1413065

<https://www.phoenixcontact.com/us/products/1413065>



Spacer plate, width: 2.5 mm, height: 62 mm, color: gray

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

D-MBKKB 2,5 - End cover

1413052

<https://www.phoenixcontact.com/us/products/1413052>

End cover, depth: 40 mm, width: 5 mm, height: 62 mm, color: gray



FB-150 METER - Fixed bridge

0201595

<https://www.phoenixcontact.com/us/products/0201595>



Cross connection rail, for fixed bridging of identical inputs and outputs, made of Cu, nickel-plated, 1 m long

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>

Reducing plug, number of positions: 1, color: gray



TS-KK 3 SO - Separating plate

2778534

<https://www.phoenixcontact.com/us/products/2778534>

Separating plate, width: 0.5 mm, color: gray



MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



SBS 5:UNBEDRUCKT - Marker card

1007219

<https://www.phoenixcontact.com/us/products/1007219>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, perforated, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 6 x 5.1 mm, Number of individual labels: 250

NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/us/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/us/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/us/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/us/products/1204096>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

MBKKB 2,5 - Mini feed-through terminal block




1414064

<https://www.phoenixcontact.com/us/products/1414064>

E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>




End clamp, width: 6.2 mm, color: gray

E/MK 1 - End bracket

1421659

<https://www.phoenixcontact.com/us/products/1421659>



End clamp width: 6 mm, color: gray

MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



PSBJ 3/13/4 - Test plug strip

0201304

<https://www.phoenixcontact.com/us/products/0201304>



Test plug strip, number of positions: 1, color: silver

PSB 3/10/4 - Test plug strip

0601292

<https://www.phoenixcontact.com/us/products/0601292>



Test plug strip, number of positions: 1, color: silver

MBKKB 2,5 - Mini feed-through terminal block



1414064

<https://www.phoenixcontact.com/us/products/1414064>

E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



MBKKB 2,5 - Mini feed-through terminal block

1414064

<https://www.phoenixcontact.com/us/products/1414064>



SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com