


# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Double-level terminal block, nom. voltage: 500 V, nominal current: 32 A, connection method: Screw connection, 1st and 2nd level, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

## Your advantages

- Large-surface labeling option

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2771146             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BE12                |
| Product key                          | BE1214              |
| Catalog page                         | Page 473 (C-1-2019) |
| GTIN                                 | 4017918068226       |
| Weight per piece (including packing) | 16.83 g             |
| Weight per piece (excluding packing) | 15.327 g            |
| Customs tariff number                | 85369010            |
| Country of origin                    | IN                  |

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Technical data

### Product properties

|                       |                            |
|-----------------------|----------------------------|
| Product type          | Multi-level terminal block |
| Product family        | UKKB                       |
| Number of connections | 4                          |
| Number of rows        | 2                          |
| Potentials            | 2                          |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 1.02 W |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

### 1st and 2nd level

|                                                                                           |                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Screw thread                                                                              | M3                                                    |
| Tightening torque                                                                         | 0.6 ... 0.8 Nm                                        |
| Stripping length                                                                          | 8 mm                                                  |
| Connection in acc. with standard                                                          | IEC 60947-7-1                                         |
| Conductor cross section rigid                                                             | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Cross section AWG                                                                         | 24 ... 12 (converted acc. to IEC)                     |
| Conductor cross section flexible                                                          | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Conductor cross section, flexible [AWG]                                                   | 24 ... 12 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Cross-section with insertion bridge, rigid                                                | 4 mm <sup>2</sup>                                     |
| Cross-section with insertion bridge, flexible                                             | 2.5 mm <sup>2</sup>                                   |
| 2 conductors with same cross section, solid                                               | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>           |
| 2 conductors with same cross section, flexible                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>           |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>          |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>           |
| Nominal current                                                                           | 32 A                                                  |
| Maximum load current                                                                      | 32 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal voltage                                                                           | 500 V                                                 |
| Nominal cross section                                                                     | 4 mm <sup>2</sup>                                     |

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| End cover width    | 2.5 mm  |
| Height             | 67 mm   |
| Depth on NS 32     | 67 mm   |
| Depth on NS 35/7,5 | 62 mm   |
| Depth on NS 35/15  | 69.5 mm |

## Material specifications

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Color                                                                   | gray        |
| Flammability rating according to UL 94                                  | V0          |
| Insulating material group                                               | I           |
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV      |
| Result                | Test passed |

### Temperature-rise test

|                                                |                                     |
|------------------------------------------------|-------------------------------------|
| Requirement temperature-rise test              | Increase in temperature $\leq 45$ K |
| Result                                         | Test passed                         |
| Short-time withstand current 4 mm <sup>2</sup> | 0.48 kA                             |
| Result                                         | Test passed                         |

### Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV     |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 32/NS 35 |
| Test force setpoint     | 1 N         |
| Result                  | Test passed |

### Test for conductor damage and slackening

|                                |                              |
|--------------------------------|------------------------------|
| Rotation speed                 | 10 rpm                       |
| Revolutions                    | 135                          |
| Conductor cross section/weight | 0.2 mm <sup>2</sup> / 0.2 kg |
|                                | 4 mm <sup>2</sup> / 0.9 kg   |
| Result                         | Test passed                  |

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |
|               | NS 32     |

# UKKB 5 - Double-level terminal block




2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Drawings

Circuit diagram

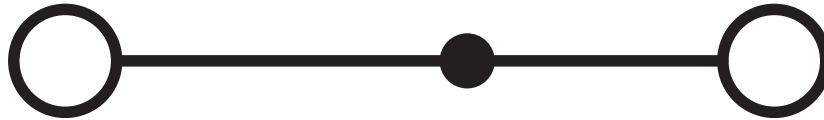

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2771146>

**DNV**

Approval ID: TAE00001CT



**CSA**

Approval ID: 13631



**cUL Recognized**

Approval ID: FILE E 60425

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 600 V                 | 30 A                  | 26 - 10           | -                           |



**IECEE CB Scheme**

Approval ID: NL-39955/A1

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 32 V                  | 500 A                 | -                 | - 4                         |



**EAC**

Approval ID: RU C-DE.BL08.B.00534



**cULus Recognized**

Approval ID: E60425

|             | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------------|-----------------------|-----------------------|-------------------|-----------------------------|
| Use group B |                       |                       |                   |                             |
|             | 300 V                 | 30 A                  | 26 - 10           | -                           |
| Use group C |                       |                       |                   |                             |
|             | 300 V                 | 30 A                  | 26 - 10           | -                           |
| Use group F |                       |                       |                   |                             |
|             | 500 V                 | 30 A                  | 26 - 10           | -                           |
| Use group D |                       |                       |                   |                             |
|             | 600 V                 | 5 A                   | 26 - 10           | -                           |



**KEMA-KEUR**

Approval ID: 71-119849

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 500 V                 | 32 A                  | -                 | - 4                         |

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

|                                                                                                                                             |                                |                                |                   |                               |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
| <div><div> <b>LR</b><br/>Approval ID: 96/20013</div></div> |                                |                                |                   |                               |
|                                                                                                                                             | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|                                                                                                                                             | 500 V                          | 32 A                           | -                 | - 4                           |

|                                                                                                                                              |  |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| <div><div> <b>NK</b><br/>Approval ID: 09 ME 141</div></div> |  |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141120 |
| ECLASS-13.0 | 27250102 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c)                                                                                                                                                                                                                              |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### IS-K 4 - Bridge bar isolator

1302338

<https://www.phoenixcontact.com/us/products/1302338>



Bridge bar isolator, color: gray

### ISSBI 10- 6 - Bridge

0301505

<https://www.phoenixcontact.com/us/products/0301505>



Bridge, pitch: 6 mm, number of positions: 10, color: silver

**i** Max. current carrying capacity: 24 A

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## LB 10-6 BU - Bridge

0202280

<https://www.phoenixcontact.com/us/products/0202280>

Bridge, pitch: 6 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 32 A

---

## LB 10-6 RD - Bridge

0202293

<https://www.phoenixcontact.com/us/products/0202293>

Bridge, pitch: 6 mm, number of positions: 10, color: red



 Max. current carrying capacity: 32 A

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## LB 10-6 GY - Bridge

0202358

<https://www.phoenixcontact.com/us/products/0202358>

Bridge, pitch: 6 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 32 A

---

## LB 100-6 GY - Bridge

0202345

<https://www.phoenixcontact.com/us/products/0202345>

Bridge, pitch: 6 mm, number of positions: 100, color: gray



 Max. current carrying capacity: 32 A

---

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## LB 100-6 RD - Bridge

0202316

<https://www.phoenixcontact.com/us/products/0202316>



Bridge, number of positions: 100, color: red


 Max. current carrying capacity: 32 A

---

## LB 100-6 BU - Bridge

0202303

<https://www.phoenixcontact.com/us/products/0202303>



Bridge, number of positions: 100, color: blue

 Max. current carrying capacity: 32 A

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## FBI 10- 6 - Fixed bridge

0203250

<https://www.phoenixcontact.com/us/products/0203250>

Fixed bridge, pitch: 6.2 mm, number of positions: 10, color: silver



 Max. current carrying capacity: 32 A

---

## FBI 20- 6 - Fixed bridge

0201867

<https://www.phoenixcontact.com/us/products/0201867>

Fixed bridge, pitch: 6.2 mm, number of positions: 20, color: silver



 Max. current carrying capacity: 32 A

---

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## FBI 100- 6 - Fixed bridge

0201650

<https://www.phoenixcontact.com/us/products/0201650>

Fixed bridge, pitch: 6.2 mm, number of positions: 100, color: silver



 Max. current carrying capacity: 32 A

---

## EB 2- 6 - Insertion bridge

0201155

<https://www.phoenixcontact.com/us/products/0201155>

Insertion bridge, pitch: 6.2 mm, number of positions: 2, color: gray



 Max. current carrying capacity: 30 A

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## EB 3- 6 - Insertion bridge

0201142

<https://www.phoenixcontact.com/us/products/0201142>

Insertion bridge, pitch: 6.2 mm, number of positions: 3, color: gray



 Max. current carrying capacity: 30 A

---

## EB 10- 6 - Insertion bridge

0201139

<https://www.phoenixcontact.com/us/products/0201139>

Insertion bridge, pitch: 6.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 30 A

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## SBRN 2-7 - Switching jumper

1413230

<https://www.phoenixcontact.com/us/products/1413230>



Switching jumper, pitch: 7 mm, number of positions: 2, color: silver

 Max. current carrying capacity: 30 A

---

## USBR 2-7 - Switching jumper

2303239

<https://www.phoenixcontact.com/us/products/2303239>



Switching jumper, pitch: 7 mm, number of positions: 2, color: silver

 Max. current carrying capacity: 30 A

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## USBRJ 2-7 - Switching jumper

2305538

<https://www.phoenixcontact.com/us/products/2305538>



Switching jumper, number of positions: 2, color: silver

 Max. current carrying capacity: 30 A

---

## DP-UKKB 3/ 5 - Spacer plate

2770804

<https://www.phoenixcontact.com/us/products/2770804>

Spacer plate, to compensate for level offsets, depth: 25 mm, width: 2.5 mm, height: 67 mm, color: gray



## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



### DG-UKKB 3/ 5 - Spacer plate

2770859

<https://www.phoenixcontact.com/us/products/2770859>



Spacer plate, to compensate for level offsets, width: 2.5 mm, height: 67 mm, color: gray

---

### D-UKKB 3/5 - End cover

2771023

<https://www.phoenixcontact.com/us/products/2771023>



End cover, depth: 52 mm, width: 2.5 mm, height: 67.2 mm, color: gray

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## FB-150 METER - Fixed bridge

0201595

<https://www.phoenixcontact.com/us/products/0201595>



Cross connection rail, for fixed bridging of identical inputs and outputs, made of Cu, nickel-plated, 1 m long

---

## KSS 3- 6 - Short-circuit connector

0309523

<https://www.phoenixcontact.com/us/products/0309523>



Short-circuit connector, pitch: 6 mm, number of positions: 3, color: black

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## KSS 6 - Short-circuit connector

0301547

<https://www.phoenixcontact.com/us/products/0301547>



Short-circuit connector, pitch: 6 mm, number of positions: 2, color: black

---

## PS-UKK 5 - Test plug

3000625

<https://www.phoenixcontact.com/us/products/3000625>



Test plug, number of positions: 10, color: red

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## PS-UKK/E - Test plug

3000641

<https://www.phoenixcontact.com/us/products/3000641>



Test plug, number of positions: 1, color: red

---

## RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/us/products/2770215>



Separating plate, depth: 16 mm, width: 0.5 mm, height: 14 mm, color: gray

---

## ATP-UKKB 3 - Partition plate

2771065

<https://www.phoenixcontact.com/us/products/2771065>



Partition plate, depth: 67 mm, width: 2.5 mm, height: 75 mm, color: gray

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## SBS 6:UNBEDRUCKT - Marker card

1007222

<https://www.phoenixcontact.com/us/products/1007222>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snapped, snap into flat marker groove, for terminal block width: 6 mm, lettering field size: 6 x 6.1 mm, Number of individual labels: 250

---

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



### NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

### NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/us/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

### ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/us/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/us/products/1051016>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/us/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/us/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/us/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



### ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/us/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

### UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/us/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

## UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/us/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



### CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

### E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

## UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## PSBJ 3/13/4 - Test plug strip

0201304

<https://www.phoenixcontact.com/us/products/0201304>



Test plug strip, number of positions: 1, color: silver

---

## PSB 3/10/4 - Test plug strip

0601292

<https://www.phoenixcontact.com/us/products/0601292>



Test plug strip, number of positions: 1, color: silver

# UKKB 5 - Double-level terminal block



2771146

<https://www.phoenixcontact.com/us/products/2771146>

## E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



---

## E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



# UKKB 5 - Double-level terminal block

2771146

<https://www.phoenixcontact.com/us/products/2771146>



## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)