

3211861

https://www.phoenixcontact.com/us/products/3211861

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5×20 , nom. voltage: 500 V, nominal current: 6.3 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 4 mm², cross section: 0.2 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- · In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The compact design and front connection enable wiring in a confined space

 space

 in a confined space

 in a
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- · Tested for railway applications

Commercial data

Item number	3211861
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE22
Product key	BE2234
Catalog page	Page 101 (C-1-2019)
GTIN	4046356482516
Weight per piece (including packing)	12.98 g
Weight per piece (excluding packing)	12.127 g
Customs tariff number	85369095
Country of origin	PL



3211861

https://www.phoenixcontact.com/us/products/3211861

Technical data

Notes

General	The current is determined by the fuse used, the voltage by the light indicator.
General	
Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.

Product properties

Product type	Fuse terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
Number of positions	1
Number of connections	2
Number of rows	1
Potentials	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics /
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Connection data

Number of connections per level	2
Nominal cross section	4 mm²
Stripping length	10 mm 12 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm² 6 mm²
Cross section AWG	24 10 (converted acc. to IEC)



3211861

https://www.phoenixcontact.com/us/products/3211861

Flexible conductor cross section (ferrule with plastic sleeve)

Conductor cross section flexible	0.2 mm² 4 mm²	
Conductor cross section, flexible [AWG]	24 12 (converted acc. to IEC)	
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm² 4 mm²	
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm² 4 mm²	
Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve)	0.5 mm² 1 mm²	
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm² 1 mm²	
Nominal current	6.3 A (the current is determined by the fuse used)	
Maximum load current	6.3 A (with 6 mm² conductor cross section, rigid)	
Nominal voltage	500 V	
Nominal cross section	4 mm²	
Connection cross sections directly pluggable		
Conductor cross section rigid	0.5 mm² 6 mm²	
Conductor cross-section flexible (ferrule without plastic sleeve)	0.75 mm² 4 mm²	

Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	56 mm
Depth	57.3 mm
Depth on NS 35/7,5	64.8 mm
Depth on NS 35/15	72.3 mm

0.5 mm² ... 4 mm²

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed



3211861

https://www.phoenixcontact.com/us/products/3211861

Temperature-rise test		
Requirement temperature-rise test	Increase in temperature ≤ 45 K	
Result	Test passed	
Result	Test passed	
Power-frequency withstand voltage		
Test voltage setpoint	1.89 kV	
Result	Test passed	
. Coult	1001,pa0000	
Mechanical properties		
Mechanical data		
Open side panel	Yes	
Mechanical tests		
Mechanical strength		
Result	Test passed	
Attachment on the carrier		
Result	Test passed	
Test for conductor damage and slackening		
Rotation speed	10 (+/- 2) rpm	
Revolutions	135	
Conductor cross section/weight	0.2 mm² / 0.2 kg	
	4 mm² / 0.9 kg	
	6 mm² / 1.4 kg	
Result	Test passed	
Environmental and real-life conditions Aging Temperature cycles	192	
Result	Test passed	
Needle-flame test Time of exposure	30 s	
Result	Test passed	
	1650 passed	
Oscillation/broadband noise		
Specification	DIN EN 50155 (VDE 0115-200):2022-06	
Spectrum	Service life test category 2, bogie-mounted	
F	Service life test category 2, bogie-mounted	
Frequency	$f_1 = 5 \text{ Hz to } f_2 = 250 \text{ Hz}$	
ACD level	5 - 250 Hz	
ASD level	6.12 (m/s²)²/Hz	
	6.12 (m/s²)²/Hz	



3211861

https://www.phoenixcontact.com/us/products/3211861

Acceleration	3.12g
	3.12g
Test duration per axis	5 h
	5 h
Test directions	X-, Y- and Z-axis
	X-, Y- and Z-axis
Result	Test passed
	Test passed
ocks	
Specification	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
	Half-sine
Acceleration	30g
	30g
Shock duration	18 ms
	18 ms
Number of shocks per direction	3
	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed
	Test passed
nbient conditions	
Ambient temperature (operation)	-60 °C 110 °C (Operating temperature range incl. self-heating for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	+70 °C)
Ambient temperature (storage/transport) Ambient temperature (assembly) Ambient temperature (actuation) Permissible humidity (operation)	+70 °C) -5 °C 70 °C
Ambient temperature (assembly) Ambient temperature (actuation) Permissible humidity (operation)	+70 °C) -5 °C 70 °C -5 °C 70 °C
Ambient temperature (assembly) Ambient temperature (actuation)	+70 °C) -5 °C 70 °C -5 °C 70 °C 20 % 90 %
Ambient temperature (assembly) Ambient temperature (actuation) Permissible humidity (operation) Permissible humidity (storage/transport)	+70 °C) -5 °C 70 °C -5 °C 70 °C 20 % 90 %
Ambient temperature (assembly) Ambient temperature (actuation) Permissible humidity (operation) Permissible humidity (storage/transport) Idards and regulations Connection in acc. with standard	+70 °C) -5 °C 70 °C -5 °C 70 °C 20 % 90 % 30 % 70 %
Ambient temperature (assembly) Ambient temperature (actuation) Permissible humidity (operation) Permissible humidity (storage/transport) adards and regulations	+70 °C) -5 °C 70 °C -5 °C 70 °C 20 % 90 % 30 % 70 %




3211861

https://www.phoenixcontact.com/us/products/3211861

Drawings

Application drawing

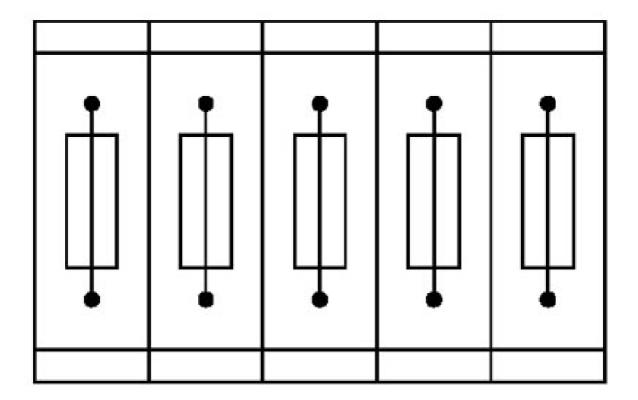


Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks



3211861

https://www.phoenixcontact.com/us/products/3211861

Circuit diagram

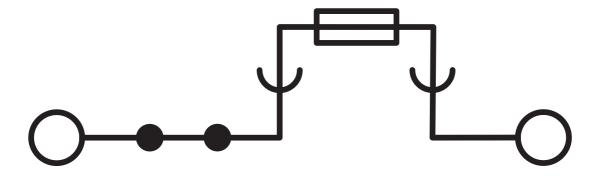




3211861

https://www.phoenixcontact.com/us/products/3211861

Application drawing

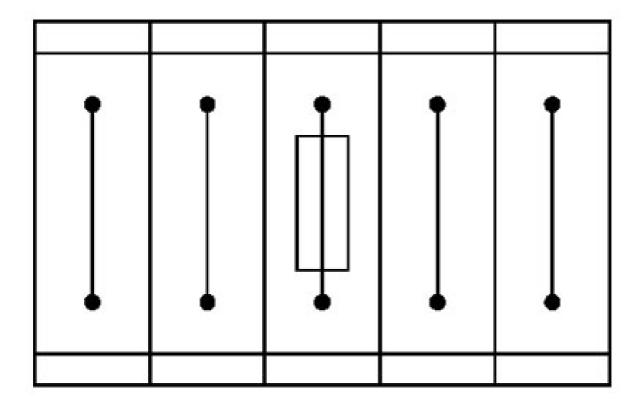

Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks



3211861

https://www.phoenixcontact.com/us/products/3211861

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3211861

N.	1

Approval ID: TAE000010T

GCSA Approval ID: 13631				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group B				
	300 V	6.3 A	24 - 10	-
Use group C				
	300 V	6.3 A	24 - 10	-

	IECEE CB Scheme
scheme	Approval ID: NI -61565

EAC
Approval ID: RU C-DE.BL08.B.00644

cULus Recognized Approval ID: E60425

LR
Approval ID: LR2371832TA

ClassNK NK Approval ID: 14ME0912

PRS
Approval ID: TE/2107/880590/21

cULus Recognized Approval ID: E60425





3211861

https://www.phoenixcontact.com/us/products/3211861



3211861

https://www.phoenixcontact.com/us/products/3211861

Classifications

UNSPSC 21.0

ECLASS

	ECLASS-11.0	27141116		
	ECLASS-12.0	27141116		
	ECLASS-13.0	27250113		
ETIM				
	ETIM 9.0	EC000899		
UN	ISPSC			

39121400



3211861

https://www.phoenixcontact.com/us/products/3211861

Environmental product compliance

EU RoHS					
Fulfills EU RoHS substance requirements	Yes, No exemptions				
China RoHS					
Environment friendly use period (EFUP)	EFUP-E				
	No hazardous substances above the limits				
EU REACH SVHC					
REACH candidate substance (CAS No.)	No substance above 0.1 wt%				



3211861

https://www.phoenixcontact.com/us/products/3211861

Accessories



Note: Applying some accessories below might limit this product.

FBS 2-6 - Plug-in bridge

3030336

https://www.phoenixcontact.com/us/products/3030336



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 32 A

FBS 3-6 - Plug-in bridge

3030242

https://www.phoenixcontact.com/us/products/3030242



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 4-6 - Plug-in bridge

3030255

https://www.phoenixcontact.com/us/products/3030255



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 32 A

FBS 5-6 - Plug-in bridge

3030349

https://www.phoenixcontact.com/us/products/3030349



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 6-6 - Plug-in bridge

1008238

https://www.phoenixcontact.com/us/products/1008238



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

1 Max. current carrying capacity: 32 A

FBS 10-6 - Plug-in bridge

3030271

https://www.phoenixcontact.com/us/products/3030271



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 20-6 - Plug-in bridge

3030365

https://www.phoenixcontact.com/us/products/3030365



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

Max. current carrying capacity: 32 A

FBSR 2-6 - Plug-in bridge

3033715

https://www.phoenixcontact.com/us/products/3033715



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBSR 3-6 - Plug-in bridge

3001594

https://www.phoenixcontact.com/us/products/3001594



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

Max. current carrying capacity: 24 A

FBSR 4-6 - Plug-in bridge

3001595

https://www.phoenixcontact.com/us/products/3001595



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBSR 5-6 - Plug-in bridge

3001596

https://www.phoenixcontact.com/us/products/3001596



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

Max. current carrying capacity: 24 A

FBSR 10-6 - Plug-in bridge

3033716

https://www.phoenixcontact.com/us/products/3033716



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red



3211861

https://www.phoenixcontact.com/us/products/3211861

FBSRH 2-6 - Short-circuit connector

3033812

https://www.phoenixcontact.com/us/products/3033812



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

Max. current carrying capacity: 24 A

FBS 2-6 BU - Plug-in bridge

3036932

https://www.phoenixcontact.com/us/products/3036932



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 3-6 BU - Plug-in bridge

3036945

https://www.phoenixcontact.com/us/products/3036945



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

1 Max. current carrying capacity: 32 A

FBS 4-6 BU - Plug-in bridge

3036958

https://www.phoenixcontact.com/us/products/3036958



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 5-6 BU - Plug-in bridge

3036961

https://www.phoenixcontact.com/us/products/3036961



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

1 Max. current carrying capacity: 32 A

FBS 10-6 BU - Plug-in bridge

3032198

https://www.phoenixcontact.com/us/products/3032198



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



3211861

https://www.phoenixcontact.com/us/products/3211861

FBS 20-6 BU - Plug-in bridge

3032208

https://www.phoenixcontact.com/us/products/3032208



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

Max. current carrying capacity: 32 A

FBS 50-6 BU - Plug-in bridge

3032211

https://www.phoenixcontact.com/us/products/3032211



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue



3211861

https://www.phoenixcontact.com/us/products/3211861

D-ST 4 - End cover

3030420

https://www.phoenixcontact.com/us/products/3030420

End cover, depth: 29 mm, width: 2.2 mm, height: 55.9 mm, color: gray



ATP-ST 4 - Partition plate

3030721

https://www.phoenixcontact.com/us/products/3030721

Partition plate, depth: 39 mm, width: 2 mm, height: 59.8 mm, color: gray





3211861

https://www.phoenixcontact.com/us/products/3211861

CARRIER-TM 300 - Marker carriers

0828282

https://www.phoenixcontact.com/us/products/0828282



Marker adapter, 300 mm in length, for manual cutting, can be engaged in a flat marker groove, for ZB ..., UC-TM ... or UCT-TM ...

DMET 5X20 - Feed-through connector

3032075

https://www.phoenixcontact.com/us/products/3032075



Feed-through metal in the shape of a 5×20 mm glass tube fuse insert for use in fuse terminal blocks.



3211861

https://www.phoenixcontact.com/us/products/3211861

WS PT 4 - Warning label

1029563

https://www.phoenixcontact.com/us/products/1029563



Warning label, 5-section, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 6.2 mm

NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5





3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730




DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602




DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored



3211861

https://www.phoenixcontact.com/us/products/3211861

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

https://www.phoenixcontact.com/us/products/0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

ZBF 5 CUS - Zack Marker strip, flat

0825025

https://www.phoenixcontact.com/us/products/0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

https://www.phoenixcontact.com/us/products/0808671



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

https://www.phoenixcontact.com/us/products/0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

https://www.phoenixcontact.com/us/products/0810821



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers $2\dots20,\,22\dots40$, etc. up to $82\dots100$, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15×5.15 mm, Number of individual labels: 10

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

https://www.phoenixcontact.com/us/products/0810863



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

UC-TMF 5 - Marker for terminal blocks

0818153

https://www.phoenixcontact.com/us/products/0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

UC-TMF 5 CUS - Marker for terminal blocks

0824638

https://www.phoenixcontact.com/us/products/0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96



3211861

https://www.phoenixcontact.com/us/products/3211861

UCT-TMF 5 - Marker for terminal blocks

0828744

https://www.phoenixcontact.com/us/products/0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

UCT-TMF 5 CUS - Marker for terminal blocks

0829658

https://www.phoenixcontact.com/us/products/0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: $5.2 \, \text{mm}$, lettering field size: $4.4 \, \text{x} \, 4.7 \, \text{mm}$, Number of individual labels: $72 \, \text{mm}$



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

https://www.phoenixcontact.com/us/products/0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6 CUS - Zack Marker strip, flat

0825027

https://www.phoenixcontact.com/us/products/0825027



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

UC-TMF 6 - Marker for terminal blocks

0818140

https://www.phoenixcontact.com/us/products/0818140



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

UC-TMF 6 CUS - Marker for terminal blocks

0824646

https://www.phoenixcontact.com/us/products/0824646



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80



3211861

https://www.phoenixcontact.com/us/products/3211861

UCT-TMF 6 - Marker for terminal blocks

0828746

https://www.phoenixcontact.com/us/products/0828746



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

UCT-TMF 6 CUS - Marker for terminal blocks

0829665

https://www.phoenixcontact.com/us/products/0829665



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: $5.4 \times 4.7 \text{ mm}$, Number of individual labels: 60



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

https://www.phoenixcontact.com/us/products/0808749



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

https://www.phoenixcontact.com/us/products/0808765



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

https://www.phoenixcontact.com/us/products/0810834



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

https://www.phoenixcontact.com/us/products/0810876



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ISH 4/0,5 - Insulating sleeve

3002885

https://www.phoenixcontact.com/us/products/3002885



Insulating sleeve, color: gray

ISH 4/1,0 - Insulating sleeve

3002898

https://www.phoenixcontact.com/us/products/3002898



Insulating sleeve, color: black



3211861

https://www.phoenixcontact.com/us/products/3211861

TMT 6 R - Marker for terminal blocks

0816498

https://www.phoenixcontact.com/us/products/0816498



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK S1.1, perforated, mounting type: snapped, snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 6.35 x 6.15 mm, Number of individual labels: 16000

TMT 6 R CUS - Marker for terminal blocks

0824488

https://www.phoenixcontact.com/us/products/0824488



Marker for terminal blocks, can be ordered: by line, white, labeled according to customer specifications, mounting type: snap into universal marker groove, snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: $6.35 \times 6.15 \text{ mm}$



3211861

https://www.phoenixcontact.com/us/products/3211861

TMT (EX9,5)R - Marker for terminal blocks

0828295

https://www.phoenixcontact.com/us/products/0828295



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: snapped, snap into tall marker groove, for terminal block width: 30000 mm, lettering field size: 9.5×50000 mm, Number of individual labels: 1

US-TM 100 - Marker for terminal blocks

0829255

https://www.phoenixcontact.com/us/products/0829255



Marker for terminal blocks, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 104 x 9.8 mm, Number of individual labels: 13



3211861

https://www.phoenixcontact.com/us/products/3211861

ZB 6:UNBEDRUCKT - Zack marker strip

1051003

https://www.phoenixcontact.com/us/products/1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6 CUS - Zack marker strip

0824992

https://www.phoenixcontact.com/us/products/0824992



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

https://www.phoenixcontact.com/us/products/1051016



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers $1\dots10$, $11\dots20$, etc. up to $491\dots500$, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15×10.5 mm, Number of individual labels: 10

ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

https://www.phoenixcontact.com/us/products/1051029



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 \dots 10, 11 \dots 20, etc. up to 491 \dots 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

https://www.phoenixcontact.com/us/products/1051032



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

https://www.phoenixcontact.com/us/products/1051414



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



3211861

https://www.phoenixcontact.com/us/products/3211861

ZB 6,LGS:U-N - Marker for terminal blocks

1051430

https://www.phoenixcontact.com/us/products/1051430



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

UC-TM 6 - Marker for terminal blocks

0818085

https://www.phoenixcontact.com/us/products/0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6×10.5 mm, Number of individual labels: 80



3211861

https://www.phoenixcontact.com/us/products/3211861

UC-TM 6 CUS - Marker for terminal blocks

0824589

https://www.phoenixcontact.com/us/products/0824589



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

UCT-TM 6 - Marker for terminal blocks

0828736

https://www.phoenixcontact.com/us/products/0828736



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60



3211861

https://www.phoenixcontact.com/us/products/3211861

UCT-TM 6 CUS - Marker for terminal blocks

0829602

https://www.phoenixcontact.com/us/products/0829602



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/us/products/1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: $0.6 \times 3.5 \times 100$ mm, 2-component grip, with non-slip grip



3211861

https://www.phoenixcontact.com/us/products/3211861

ST-BW - Actuation tool

1207608

https://www.phoenixcontact.com/us/products/1207608



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages

PROJECT COMPLETE - Software

1050453

https://www.phoenixcontact.com/us/products/1050453



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com