

3212133

https://www.phoenixcontact.com/us/products/3212133

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G /  $6.3 \times 32$ , nom. voltage: 250 V, nominal current: 10 A, connection method: Push-in connection, Rated cross section:  $6 \text{ mm}^2$ , cross section:  $0.5 \text{ mm}^2$ -  $10 \text{ mm}^2$ , mounting type: NS 35/7.5, NS 35/15, color: block

## Your advantages

- · In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- The compact design and front connection enable wiring in a confined space<br/>

  br/>

### Commercial data

| Item number                          | 3212133             |
|--------------------------------------|---------------------|
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BE22                |
| Product key                          | BE2234              |
| Catalog page                         | Page 112 (C-1-2019) |
| GTIN                                 | 4046356494632       |
| Weight per piece (including packing) | 26.611 g            |
| Weight per piece (excluding packing) | 26.611 g            |
| Customs tariff number                | 85369095            |
| Country of origin                    | CN                  |



3212133

https://www.phoenixcontact.com/us/products/3212133

## Technical data

### Notes

| General | The current is determined by the fuse used, the voltage by the selected LED.  If the fuse is faulty, the downstream circuit will not be disconnected. |
|---------|---|
|---------|---|

## Product properties

| Product type          | Fuse terminal block |
|-----------------------|---------------------|
| Number of connections | 2                   |
| Number of rows        | 1                   |
| Potentials            | 1                   |
|                       |                     |

#### Insulation characteristics

| Overvoltage category | III |
|----------------------|-----|
| Degree of pollution  | 3   |

## Electrical properties

| Glass / ceramics /   |
|--|
| 6 kV   |
| 1.31 W   |
| G / 6,3 x 32   |
| 110 V AC/DC 250 V AC/DC (LED red)  |
| 0.41 mA 0.96 mA  |
| max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)                     |
| max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)        |
| max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)                |
| max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |
|  |

## Input data

| LED voltage range | 110 V AC/DC 250 V AC/DC (LED red) |
|-------------------|-----------------------------------|
|-------------------|-----------------------------------|

## Connection data

| Number of connections per level  | 2                            |
|----------------------------------|------------------------------|
| Nominal cross section            | 6 mm²                        |
| Rated cross section AWG          | 10                           |
| Stripping length                 | 10 mm 12 mm                  |
| Internal cylindrical gage        | A5                           |
| Connection in acc. with standard | IEC 60947-7-3                |
| Conductor cross section rigid    | 0.5 mm² 10 mm²               |
| Cross section AWG                | 20 8 (converted acc. to IEC) |



3212133

https://www.phoenixcontact.com/us/products/3212133

| Conductor cross section flexible  | 0.5 mm² 10 mm²  |
|---|---|
| Conductor cross section, flexible [AWG]   | 20 8 (converted acc. to IEC)  |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.5 mm² 6 mm²   |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.5 mm² 6 mm²   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup> When using TWIN ferrules, we recommend a minimum ferrule length of 13 mm. |
| Nominal current   | 10 A  |
| Maximum load current  | 10 A (the current is determined by the fuse used)   |
| Nominal voltage   | 250 V   |
| Nominal cross section   | 6 mm²   |
| onnection cross sections directly pluggable   |   |
| Conductor cross section rigid   | 1 mm² 10 mm²  |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 1 mm² 6 mm²   |
|   | 1 mm² 6 mm²   |

#### **Dimensions**

| Width              | 8.2 mm  |
|--------------------|---------|
| End cover width    | 2.2 mm  |
| Height             | 74.5 mm |
| Depth              | 61.5 mm |
| Depth on NS 35/7,5 | 69 mm   |
| Depth on NS 35/15  | 76.5 mm |

## Material specifications

| Color                                  | black |
|--|-------|
| Flammability rating according to UL 94 | V0    |
| Insulating material group              | I     |
| Insulating material                    | PA    |

## Mechanical properties

## Mechanical data

| Open side panel | No |
|-----------------|----|
|-----------------|----|

## Environmental and real-life conditions

## Ambient conditions

| Ambient temperature (operation)          | -60 °C 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
|--|--|
| Ambient temperature (storage/transport)  | -25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)  |
| Ambient temperature (assembly)           | -5 °C 70 °C  |
| Ambient temperature (actuation)          | -5 °C 70 °C  |
| Permissible humidity (operation)         | 20 % 90 %  |
| Permissible humidity (storage/transport) | 30 % 70 %  |



3212133

https://www.phoenixcontact.com/us/products/3212133

## Standards and regulations

|   | Connection in acc. with standard | IEC 60947-7-3 |
|---|----------------------------------|---------------|
| М | punting                          |               |
|   | Mounting type                    | NS 35/7,5     |
|   |                                  | NS 35/15      |




3212133

https://www.phoenixcontact.com/us/products/3212133

## Drawings

Application drawing

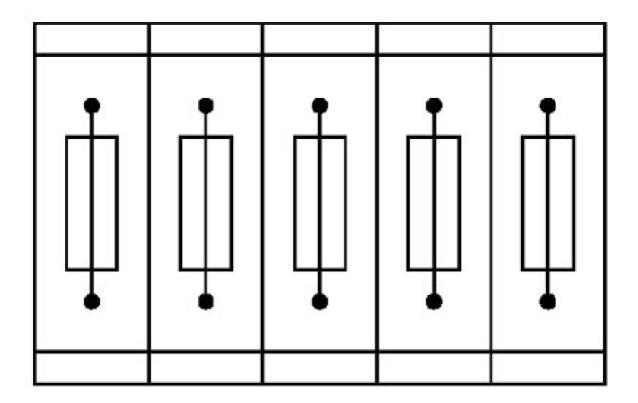


Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks



3212133

https://www.phoenixcontact.com/us/products/3212133

Application drawing

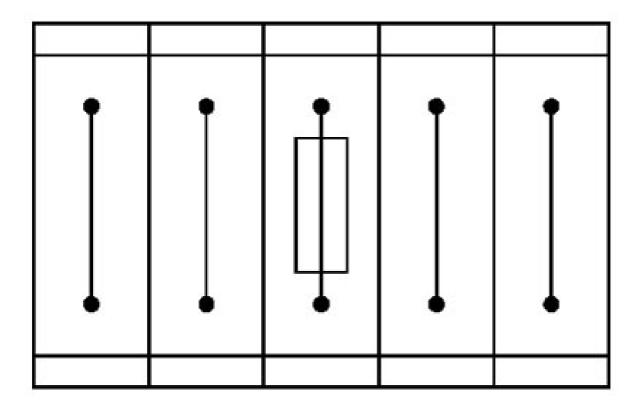


Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks



3212133

https://www.phoenixcontact.com/us/products/3212133

## Circuit diagram

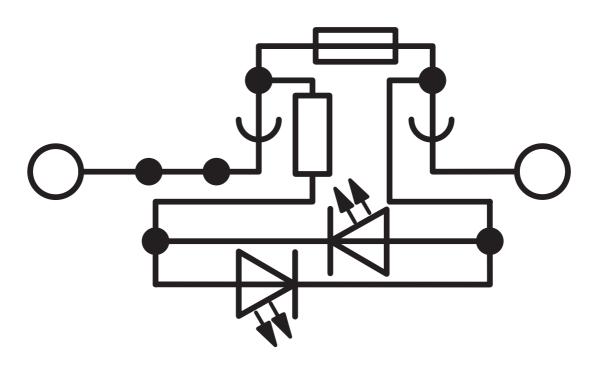



3212133

https://www.phoenixcontact.com/us/products/3212133

## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3212133

Approval ID: TAE000010T

| CSA Approval ID: 13631 |                                |                                |                   |                               |
|------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
|                        | Nominal voltage U <sub>N</sub> | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
| Use group B            |                                |                                |                   |                               |
|                        | 300 V                          | 10 A                           | 20 - 8            | -                             |
| Use group C            |                                |                                |                   |                               |
|                        | 300 V                          | 10 A                           | 20 - 8            | -                             |
| Use group D            |                                |                                |                   |                               |
|                        | 600 V                          | 5 A                            | 20 - 8            | -                             |

| EAC  | EAC                               |
|------|-----------------------------------|
| LIIL | Approval ID: RU C-DE.BL08.B.00644 |

| <b>.712</b> us | cULus Recognized    |
|----------------|---------------------|
| C TABUS        | Approval ID: F60425 |







3212133

https://www.phoenixcontact.com/us/products/3212133

## Classifications

## **ECLASS**

UNSPSC 21.0

|        | ECLASS-11.0 | 27141116 |
|--------|-------------|----------|
|        | ECLASS-12.0 | 27141116 |
|        | ECLASS-13.0 | 27250113 |
| ETIM   |             |          |
|        | ETIM 9.0    | EC000899 |
| UNSPSC |             |          |

39121400



3212133

https://www.phoenixcontact.com/us/products/3212133

## Environmental product compliance

| EU RoHS                                 |  |  |  |
|---|--|--|--|
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |  |  |
| China RoHS                              |  |  |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |  |  |
|   | No hazardous substances above the limits |  |  |
| EU REACH SVHC                           |  |  |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |  |  |



3212133

https://www.phoenixcontact.com/us/products/3212133

## Accessories



Note: Applying some accessories below might limit this product.

## FBS 2-8 - Plug-in bridge

3030284

https://www.phoenixcontact.com/us/products/3030284



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 30 A

## FBS 3-8 - Plug-in bridge

3030297

https://www.phoenixcontact.com/us/products/3030297



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 4-8 - Plug-in bridge

3030307

https://www.phoenixcontact.com/us/products/3030307



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

1 Max. current carrying capacity: 30 A

## FBS 5-8 - Plug-in bridge

3030310

https://www.phoenixcontact.com/us/products/3030310



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 6-8 - Plug-in bridge

3032470

https://www.phoenixcontact.com/us/products/3032470



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: red

1 Max. current carrying capacity: 30 A

## FBS 10-8 - Plug-in bridge

3030323

https://www.phoenixcontact.com/us/products/3030323



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 2-8 CT - Plug-in bridge

3033830

https://www.phoenixcontact.com/us/products/3033830



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

Max. current carrying capacity: 30 A

## FBS 3-8 CT - Plug-in bridge

3033831

https://www.phoenixcontact.com/us/products/3033831



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 4-8 CT - Plug-in bridge

3033832

https://www.phoenixcontact.com/us/products/3033832



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

1 Max. current carrying capacity: 30 A

## FBS 10-8 CT - Plug-in bridge

3033833

https://www.phoenixcontact.com/us/products/3033833



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 2-8 BU - Plug-in bridge

3032567

https://www.phoenixcontact.com/us/products/3032567



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

Max. current carrying capacity: 30 A

## FBS 3-8 BU - Plug-in bridge

3032570

https://www.phoenixcontact.com/us/products/3032570



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 4-8 BU - Plug-in bridge

3032583

https://www.phoenixcontact.com/us/products/3032583



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

1 Max. current carrying capacity: 30 A

## FBS 5-8 BU - Plug-in bridge

3032596

https://www.phoenixcontact.com/us/products/3032596



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 6-8 BU - Plug-in bridge

3032677

https://www.phoenixcontact.com/us/products/3032677



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

1 Max. current carrying capacity: 30 A

## FBS 10-8 BU - Plug-in bridge

3032606

https://www.phoenixcontact.com/us/products/3032606



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 2-8 GY - Plug-in bridge

3032621

https://www.phoenixcontact.com/us/products/3032621



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: gray

Max. current carrying capacity: 30 A

## FBS 3-8 GY - Plug-in bridge

3032622

https://www.phoenixcontact.com/us/products/3032622



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: gray



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 4-8 GY - Plug-in bridge

3032635

https://www.phoenixcontact.com/us/products/3032635



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: gray

1 Max. current carrying capacity: 30 A

## FBS 5-8 GY - Plug-in bridge

3032648

https://www.phoenixcontact.com/us/products/3032648



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: gray



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBS 6-8 GY - Plug-in bridge

3032664

https://www.phoenixcontact.com/us/products/3032664



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: gray

1 Max. current carrying capacity: 30 A

## FBS 10-8 GY - Plug-in bridge

3032651

https://www.phoenixcontact.com/us/products/3032651



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: gray



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBSR 2-8 - Plug-in bridge

3033808

https://www.phoenixcontact.com/us/products/3033808



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

Max. current carrying capacity: 30 A

## FBSR 3-8 - Plug-in bridge

3001597

https://www.phoenixcontact.com/us/products/3001597



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBSR 4-8 - Plug-in bridge

3000585

https://www.phoenixcontact.com/us/products/3000585



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 30 A

## FBSR 5-8 - Plug-in bridge

3033809

https://www.phoenixcontact.com/us/products/3033809



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## FBSR 10-8 - Plug-in bridge

3001599

https://www.phoenixcontact.com/us/products/3001599



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

1 Max. current carrying capacity: 30 A

## FBSR 16-8 - Plug-in bridge

3033816

https://www.phoenixcontact.com/us/products/3033816



Plug-in bridge, pitch: 8.2 mm, number of positions: 16, color: red



3212133

https://www.phoenixcontact.com/us/products/3212133

## SB-MER 2-8 - Switching jumper

3000587

https://www.phoenixcontact.com/us/products/3000587



Switching jumper, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange

Max. current carrying capacity: 30 A

## SB-MER 3-8 - Switching jumper

3000588

https://www.phoenixcontact.com/us/products/3000588



Switching jumper, pitch: 8.2 mm, number of positions: 3, length: 25 mm, color: gray/orange



3212133

https://www.phoenixcontact.com/us/products/3212133

## SB-MER 4-8 - Switching jumper

3000589

https://www.phoenixcontact.com/us/products/3000589



Switching jumper, pitch: 8.2 mm, number of positions: 4, length: 25 mm, color: gray/orange

1 Max. current carrying capacity: 30 A

### ATP-ST 4 - Partition plate

3030721

https://www.phoenixcontact.com/us/products/3030721



Partition plate, depth: 39 mm, width: 2 mm, height: 59.8 mm, color: gray



3212133

https://www.phoenixcontact.com/us/products/3212133

### CARRIER-TM 300 - Marker carriers

0828282

https://www.phoenixcontact.com/us/products/0828282



Marker adapter, 300 mm in length, for manual cutting, can be engaged in a flat marker groove, for ZB ..., UC-TM ... or UCT-TM ...

## WS PT 6 - Warning label

1029029

https://www.phoenixcontact.com/us/products/1029029



Warning label, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 8.2 mm



3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

### NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

#### NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

### NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

### NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored



3212133

https://www.phoenixcontact.com/us/products/3212133

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



### NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

### NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white




3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

### NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

### NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3212133

https://www.phoenixcontact.com/us/products/3212133

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

### NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15





3212133

https://www.phoenixcontact.com/us/products/3212133

### NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

https://www.phoenixcontact.com/us/products/1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZB 6 CUS - Zack marker strip

0824992

https://www.phoenixcontact.com/us/products/0824992



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

### ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

https://www.phoenixcontact.com/us/products/1051016



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.  $15 \times 10.5$  mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

https://www.phoenixcontact.com/us/products/1051029



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1  $\dots$  10, 11  $\dots$  20, etc. up to 491  $\dots$  500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

### ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

https://www.phoenixcontact.com/us/products/1051032



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

#### ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

https://www.phoenixcontact.com/us/products/1051414



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

#### ZB 6,LGS:U-N - Marker for terminal blocks

1051430

https://www.phoenixcontact.com/us/products/1051430



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10. 5 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

#### UC-TM 6 - Marker for terminal blocks

0818085

https://www.phoenixcontact.com/us/products/0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

#### UC-TM 6 CUS - Marker for terminal blocks

0824589

https://www.phoenixcontact.com/us/products/0824589



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80



3212133

https://www.phoenixcontact.com/us/products/3212133

#### UCT-TM 6 - Marker for terminal blocks

0828736

https://www.phoenixcontact.com/us/products/0828736



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

#### UCT-TM 6 CUS - Marker for terminal blocks

0829602

https://www.phoenixcontact.com/us/products/0829602



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

https://www.phoenixcontact.com/us/products/0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

### ZBF 6 CUS - Zack Marker strip, flat

0825027

https://www.phoenixcontact.com/us/products/0825027



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

#### UC-TMF 6 - Marker for terminal blocks

0818140

https://www.phoenixcontact.com/us/products/0818140



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

#### UC-TMF 6 CUS - Marker for terminal blocks

0824646

https://www.phoenixcontact.com/us/products/0824646



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80



3212133

https://www.phoenixcontact.com/us/products/3212133

#### UCT-TMF 6 - Marker for terminal blocks

0828746

https://www.phoenixcontact.com/us/products/0828746



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

#### UCT-TMF 6 CUS - Marker for terminal blocks

0829665

https://www.phoenixcontact.com/us/products/0829665



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

https://www.phoenixcontact.com/us/products/0808749



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

### ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

https://www.phoenixcontact.com/us/products/0808765



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1  $\dots$  10, 11  $\dots$  20, etc. up to 91  $\dots$  100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

https://www.phoenixcontact.com/us/products/0810834



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

### ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

https://www.phoenixcontact.com/us/products/0810876



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

https://www.phoenixcontact.com/us/products/0808781



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

### ZBF 8 CUS - Zack Marker strip, flat

0825030

https://www.phoenixcontact.com/us/products/0825030



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10



3212133

https://www.phoenixcontact.com/us/products/3212133

### ZBF 8,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808804

https://www.phoenixcontact.com/us/products/0808804



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

#### UC-TMF 8 - Marker for terminal blocks

0818137

https://www.phoenixcontact.com/us/products/0818137



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size:  $7.6 \times 5.1$  mm, Number of individual labels: 56



3212133

https://www.phoenixcontact.com/us/products/3212133

#### UC-TMF 8 CUS - Marker for terminal blocks

0824654

https://www.phoenixcontact.com/us/products/0824654



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

#### UCT-TMF 8 - Marker for terminal blocks

0828748

https://www.phoenixcontact.com/us/products/0828748



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42



3212133

https://www.phoenixcontact.com/us/products/3212133

### UCT-TMF 8 CUS - Marker for terminal blocks

0829672

https://www.phoenixcontact.com/us/products/0829672



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

### ISH 4/0,5 - Insulating sleeve

3002885

https://www.phoenixcontact.com/us/products/3002885



Insulating sleeve, color: gray



3212133

https://www.phoenixcontact.com/us/products/3212133

### ISH 4/1,0 - Insulating sleeve

3002898

https://www.phoenixcontact.com/us/products/3002898



Insulating sleeve, color: black

#### TMT 6 R - Marker for terminal blocks

0816498

https://www.phoenixcontact.com/us/products/0816498



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLL MASTER 300/600, THERMOMARK X1.2, THERMOMARK S1.1, perforated, mounting type: snapped, snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 6.35 x 6.15 mm, Number of individual labels: 16000



3212133

https://www.phoenixcontact.com/us/products/3212133

#### TMT 6 R CUS - Marker for terminal blocks

0824488

https://www.phoenixcontact.com/us/products/0824488



Marker for terminal blocks, can be ordered: by line, white, labeled according to customer specifications, mounting type: snap into universal marker groove, snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 6. 35 x 6 15 mm

#### TMT (EX9,5)R - Marker for terminal blocks

0828295

https://www.phoenixcontact.com/us/products/0828295



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: snapped, snap into tall marker groove, for terminal block width: 30000 mm, lettering field size:  $9.5 \times 50000$  mm, Number of individual labels: 1



3212133

https://www.phoenixcontact.com/us/products/3212133

#### US-TM 100 - Marker for terminal blocks

0829255

https://www.phoenixcontact.com/us/products/0829255



Marker for terminal blocks, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 104 x 9.8 mm, Number of individual labels: 13

#### SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/us/products/1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size:  $0.6 \times 3.5 \times 100$  mm, 2-component grip, with non-slip grip



3212133

https://www.phoenixcontact.com/us/products/3212133

#### ST-BW - Actuation tool

1207608

https://www.phoenixcontact.com/us/products/1207608



Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages

### PROJECT COMPLETE - Software

1050453

https://www.phoenixcontact.com/us/products/1050453



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com