## 1SNK505314R0000 - ACTIVE

#### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK505314R0000 Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block, Gray, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



#### Block Function: **Disconnect**

Modular Terminal Block Product Type: Screw Clamp Terminal Block

Primary Product Color: Gray

Product Spacing: 5.2 mm [.205 in ]

Number of Positions: 2

#### Features

#### **Product Type Features**

Modular Terminal Block Product Type

Screw Clamp Terminal Block

#### **Configuration Features**

Gauge Type	A3-B3
Number of Levels	1
Number of Circuits	1
Block Function	Disconnect
Number of Positions	2
Electrical Characteristics	
Impulse Withstanding Voltage Rating (IEC)	6000 V
Power Loss	.6 W
Short-Time Withstanding Current Rating @ 1s	300 A
Voltage Rating (IEC)	400 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	150 V
Voltage Rating (CSA)	150 V
Dielectric Withstanding Voltage (Max)	1890 V
Current Rating (UL)	18 A
Current Rating (IEC)	18 A

Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block, Gray, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK



### **Body Features**

Product Weight	8.4 g[.331 oz]
Primary Product Color	Gray
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail
Housing Features	
Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - Twin Ferrule per Screw Clamp	24 - 16 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	24 - 10 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	24 - 14 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 - 4 mm <sup>2</sup>
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	.2 - 1.5 mm²
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 - 10 AWG
Wire Stripping Length	10.5 mm[.413 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	.2 - 1.5 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	47.3 mm
Product Length	47.3 mm[1.86 in]
Product Height	53 mm
Product Spacing	5.2 mm[.205 in]
Usage Conditions	
Installation Temperature Range	-5 - 40 °C[23 - 104 °F]

Operating Temperature Range

### Industry Standards

IP Rating	
-----------	--

UL Flammability Rating

UL 94V-0

IP20

-55 - 110 °C[-67 - 230 °F]

### Product Compliance

For compliance documentation, visit the product page on TE.com>

Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block, Gray, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block, Gray, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK




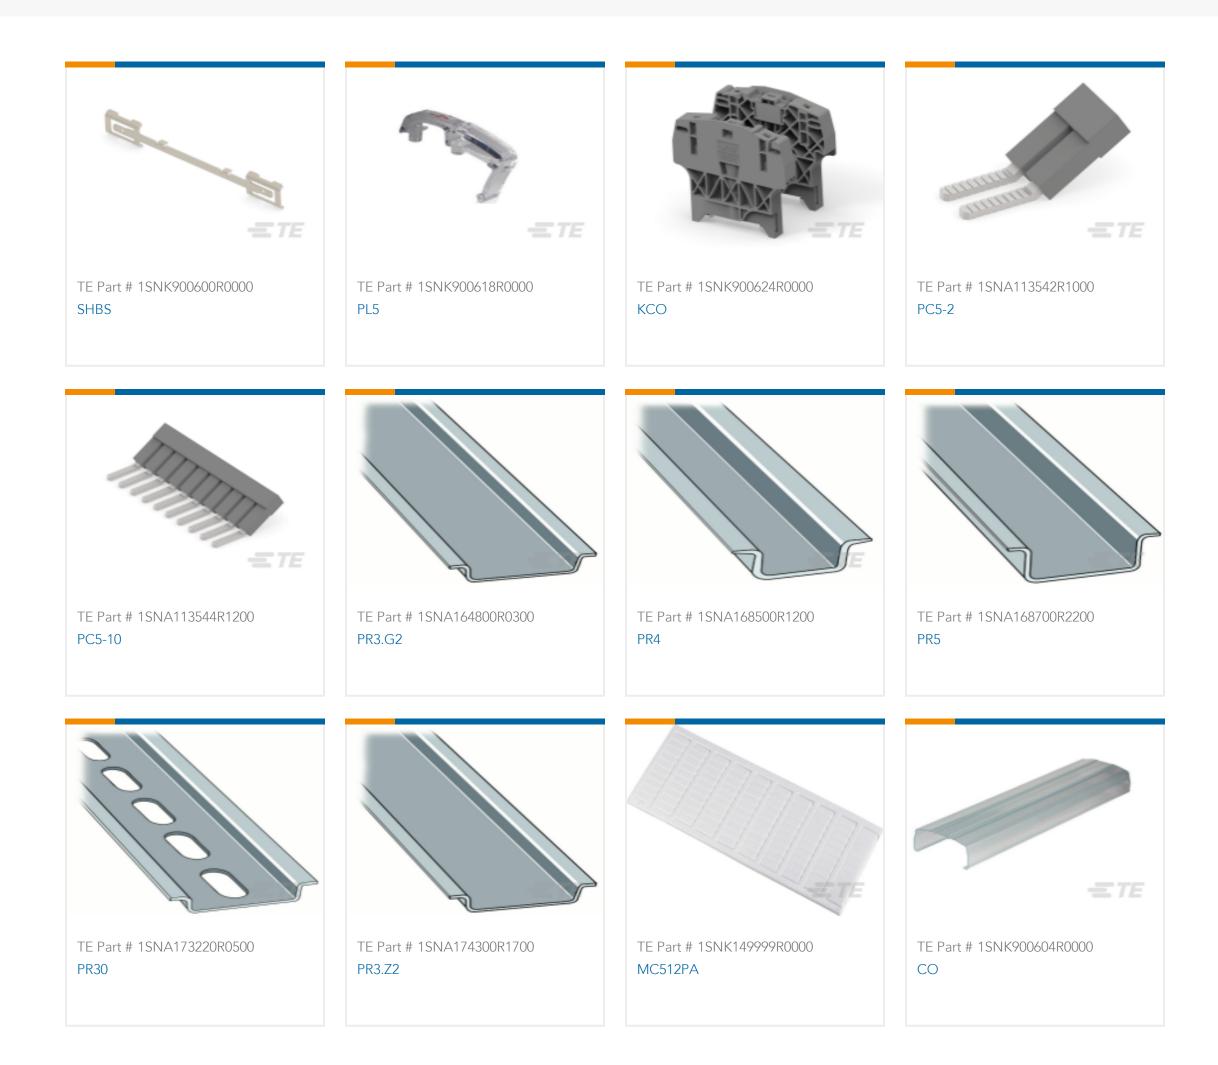

# Also in the Series | ENTRELEC SNK

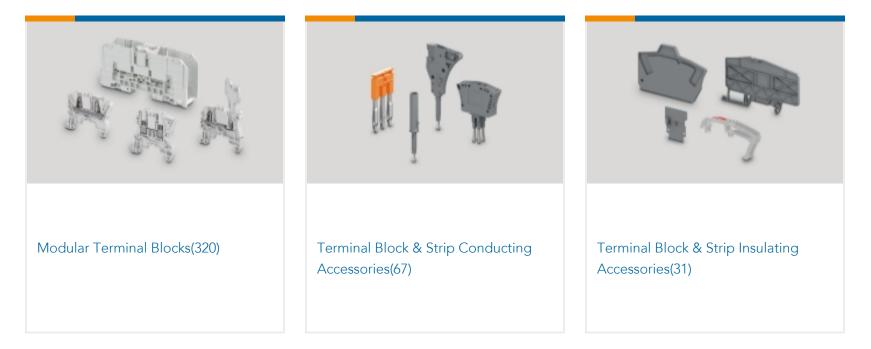

## **Customers Also Bought**

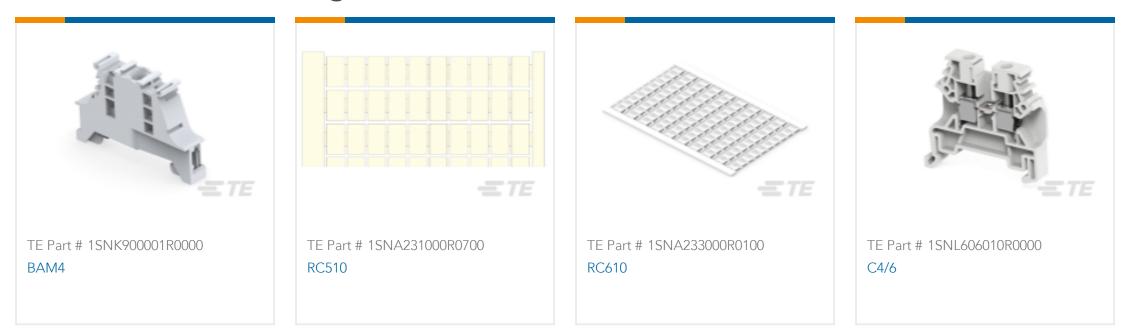

Modular Terminal Blocks, Disconnect, Screw Clamp Terminal Block, Gray, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK







### Documents

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1SNK505314R0000\_A.2d\_dxf.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_1SNK505314R0000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK505314R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

**ENTRELEC Terminal Block - Master Catalog** 

English

ZS4-SP-T2

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)