
# 1SNK706010R0000 V ACTIVE



#### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK706010R0000

Modular Terminal Blocks, Feed-Through, PI-Spring Terminal Block,

Gray, Product Spacing .236 in [6 mm], 2 Position, DIN Rail,

ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks









PI-Spring Terminal Block

8000 V

600 V

30 A

1 W

2200 V



Block Function: Feed-Through

Modular Terminal Block Product Type: PI-Spring Terminal Block

Primary Product Color: Gray Product Spacing: 6 mm [.236 in]

Modular Terminal Block Product Type

Impulse Withstanding Voltage Rating (IEC)

Dielectric Withstanding Voltage (Max)

Voltage Rating (CSA)

Current Rating (CSA)

Power Loss

Number of Positions: 2

#### **Features**

# **Product Type Features**

Configuration Features	
Gauge Type	2.9 mm Dia.
Number of Levels	1
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2
Electrical Characteristics	
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V



Short-Time Withstanding Current Rating @ 1s	480 A
Voltage Rating (IEC)	1000 V
Current Rating (UL)	30 A
Current Rating (IEC)	32 A
Body Features	
Product Weight	7.9 g[.311 oz]
Primary Product Color	Gray
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail
Housing Features	
Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.5 - 6 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	.5 - 1 mm²
Wire Stripping Length	12.5 mm[.492 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.5 - 4 mm <sup>2</sup>
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 - 12 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 - 4 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	41.1 mm
Product Length	41.1 mm
Product Height	55.3 mm
Product Spacing	6 mm[.236 in]
Usage Conditions	
Installation Temperature Range	-5 - 40 °C[23 - 104 °F]
Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]
Industry Standards	
IP Rating	IP20



# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts












































# Also in the Series | ENTRELEC SNK



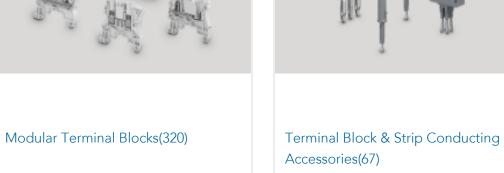



Terminal Block & Strip Insulating Accessories(31)

# Customers Also Bought





TE Part # 1SNK705150R0000 ZK2.5-PE



TE Part # 1SNK705210R0000 ZK2.5-D2



TE Part # 1SNK708150R0000 ZK6-PE



ZK10



TE Part # 1SNK712010R0000 ZK16



TE Part # 1SNK905302R0000 JB5-2



TE Part # 1SNK706020R0000 ZK4-BL



ZK6-BL



TE Part # 1SNA290241R1000 DB2.5/5.2L

TE Part # 1SNA290281R0100 FEDB.L

### **Documents**

# **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706010R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706010R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706010R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use

## Datasheets & Catalog Pages

**ENTRELEC Terminal Block - Master Catalog** 

**ENTRELEC Terminal Block - Master Catalog** 

English

Modular Terminal Blocks, Feed-Through, PI-Spring Terminal Block, Gray, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK



ZK4

English

SNK SERIES TERMINAL BLOCKS

English

**ENTRELEC Terminal Blocks Catalogue (RUS)** 

**Essential Entrelec Terminal Blocks** 

French

**Essential Entrelec Terminal Blocks** 

English

**Essential Entrelec Terminal Blocks** 

Japanese

Agency Approvals

Bureau Veritas Marine and Offshore Certificate

English