# 1SNK706150R0000 - ACTIVE

#### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK706150R0000 Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Ground

Modular Terminal Block Product Type: PI-Spring Terminal Block

Primary Product Color: Green & Yellow

Product Spacing: 6 mm [.236 in ]

Number of Positions: 2

## Features

### Product Type Features

Modular Terminal Block Product Type

PI-Spring Terminal Block

#### **Configuration Features**

Gauge Type	2.9 mm Dia.
Number of Levels	1
Number of Circuits	1
Block Function	Ground
Number of Positions	2
Electrical Characteristics	
Impulse Withstanding Voltage Rating (IEC)	8000 V
Dielectric Withstanding Voltage (Max)	2200 V
Short-Time Withstanding Current Rating @ 1s	480 A
Body Features	
Product Weight	12.6 g[.496 oz]
Primary Product Color	Green & Yellow
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

**C** For support call +1 800 522 6752

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK



# Housing Features

Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.5 - 6 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	26 - 18 AWG
Wire Stripping Length	12.5 mm[.492 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.5 - 4 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 - 12 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 - 4 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	41.2 mm
Product Length	41.2 mm
Product Height	62.7 mm
Product Spacing	6 mm[.236 in]
Usage Conditions	
Installation Temperature Range	-5 - 40 °C[23 - 104 °F]
Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]

# Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK




#### Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

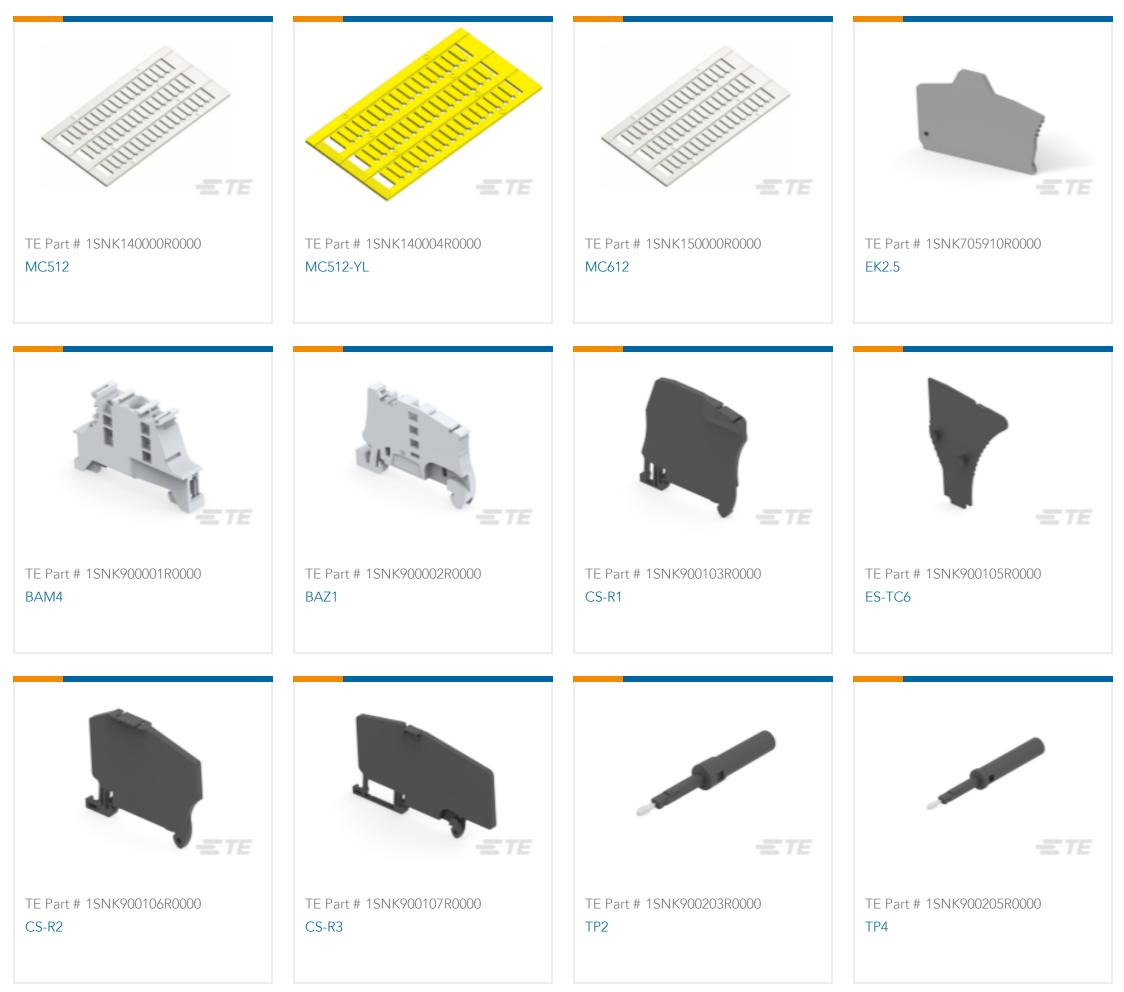

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK



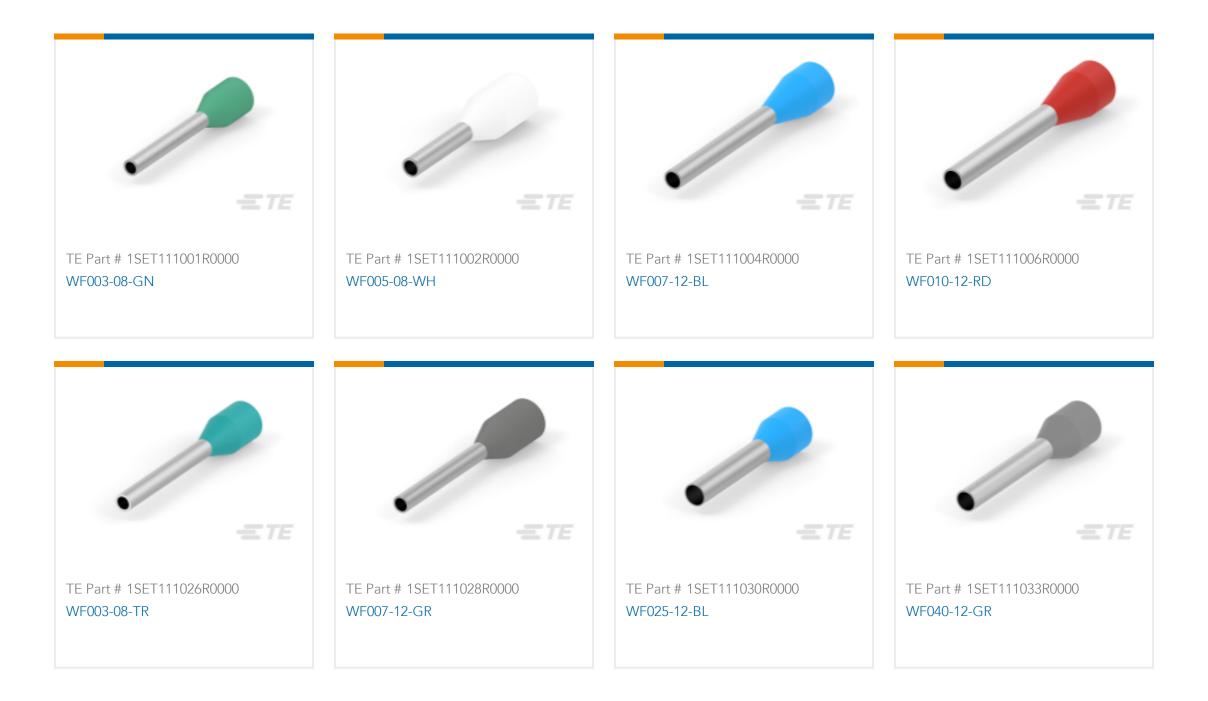

# Also in the Series ENTRELEC SNK






Terminal Block & Strip Conducting



Accessories(67)

Terminal Block & Strip Insulating Accessories(31)

# Customers Also Bought

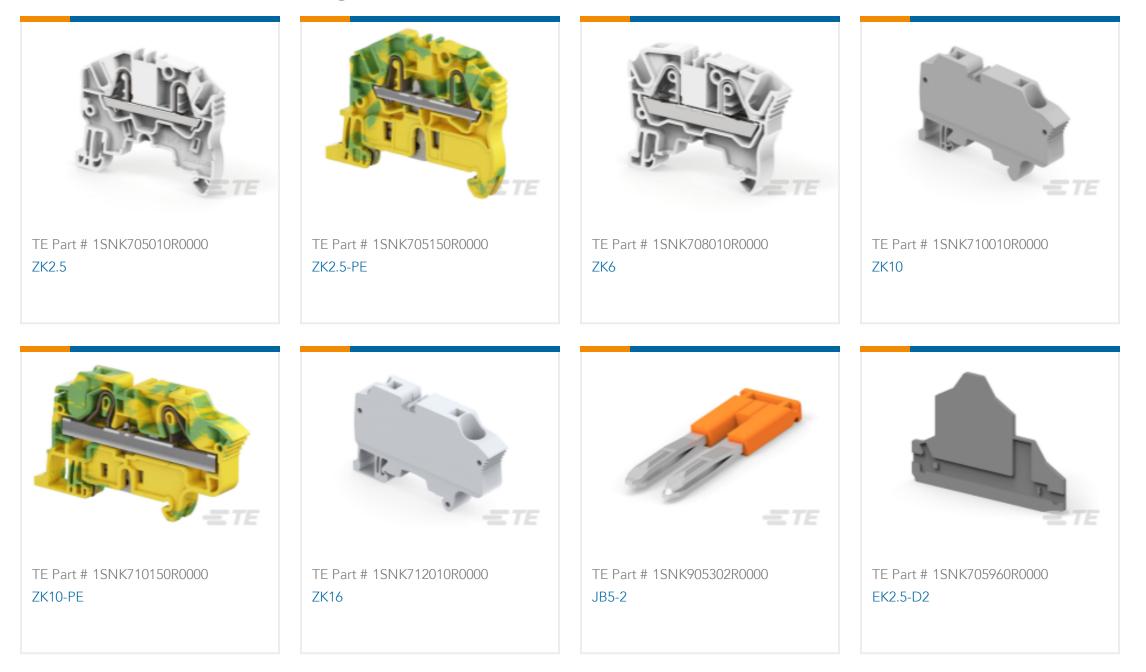

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK





# Documents

## **CAD** Files

### 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706150R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706150R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK706150R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

**Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog** 

**ENTRELEC Terminal Block - Master Catalog** 

English

ZK4-PE

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

**Essential Entrelec Terminal Blocks** 

French

**Essential Entrelec Terminal Blocks** 

English

**Essential Entrelec Terminal Blocks** 

Japanese

Agency Approvals Bureau Veritas Marine and Offshore Certificate English

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .236 in [6 mm], 2 Position, DIN Rail, ENTRELEC SNK

