


# Product data sheet

## Characteristics

# 9422TFB2

Operating mechanism, flange mounted, bracket mount, fixed depth assembly, 200A, 600V, H, K, J, R fuseholder, switch mechanism, 6 inch handle

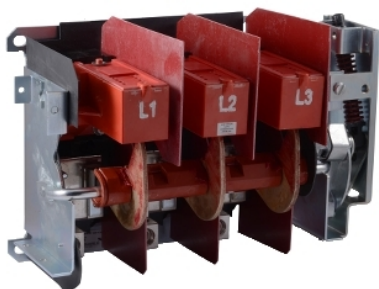

## Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

## Complementary

Mounting Type	Bracket fixed depth
Current Rating	200 A
Horsepower Rating	40 Hp 200 V AC 60 Hp 230 V AC 125 Hp 460 V AC 150 Hp 575 V AC 40 hp 250 V DC
Fuse Rating	200 A 250/600 V
Handle Type	6 in handle included
Fuse Type	K R J H

## Environment

Certifications	CSA[RETURN]UL Recognized
----------------	--------------------------




## Ordering and shipping details

Category	US10CP121732
Discount Schedule	0CP1
GTIN	785901043782
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.50 in (34.29 cm)
Package 1 Width	14.50 in (36.83 cm)
Package 1 Length	23.00 in (58.42 cm)
Package 1 Weight	28.19 lb(US) (12.788 kg)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------