SIEMENS

Data sheet

3LD9200-5B



Auxiliary switch, 1 NO+1 NC, accessory for main and emergency switching-off 3LD2 switch front mounting and for molded case switch 3LD5 UL front mounting

Model	
product brand name	SENTRON
product designation	auxiliary switch
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches, front mounting
operational current	
 at AC-15 at 110 V rated value 	6 A
 at AC-15 at 230 V rated value 	3 A
 at AC-15 at 500 V rated value 	1.4 A
• at DC-13 at 24 V rated value	4 A
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	
• minimum	0.8 N·m
• maximum	1.2 N·m
Approvals Certificates	

General Product Approval









Miscellaneous




 other
 Environment

 Miscellaneous
 Confirmation

 Environmental Confirmations
 Environmental Confirmations

Further information
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5B
Service&Support (Manuals, Certificates, Characteristics, FAQs,)
https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5B
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5B
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications

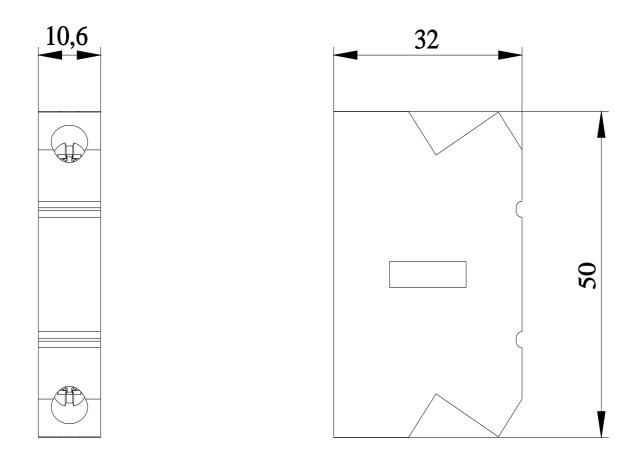

last modified:

4/18/2024 🖸