

# easyE<sup>®</sup> 60

## Electric Linear Actuator

**Bansbach**  
easylift<sup>®</sup>

**Data** Motor/Gear 4 VDC power supply, permanent magnet motor

Gear Ratio	D	E	F	G	H
Force 12V (dyn. push and pull) [N]	1900	4300	6600	8100	10000
Speed at maximum load [mm/s]	26	12	8	6	5

Current at maximum load: **24VDC** (max 28VDC) = 11.5A

### Max. static load\*/Self-locking force

\*Depending on stroke length for push-applications

### Temperature

### Relative humidity

### Protection class

### Cable specification

### Bending radius

### Materials

### Duty cycle

### Color

### Stroke length/weight

Stroke	[mm]	50	100	150	200	250	300	350	400	500	750
Weight	[kg]	4.1	4.4	4.7	5	5.3	5.6	5.9	6.2	6.5	7.6

Type easyE 60 max. load limited to 5000 N for stroke lengths  $\geq$  500mm. Actual weight may vary depending on model and options selected.

### Options:

- Stainless steel versions (AISI 316)
- Front and rear brackets in aluminum or stainless steel
- Front and rear brackets with clevis
- Brackets with spherical bearings
- Hall sensors for positioning and/or synchronization
- Other cable lengths (1-9m)
- Connector types (Molex 5557/DIN 8 pole/Phono/Others)
- Low noise
- HE (Harsh Environment) version (gear ratio 1:4 not available). Tested according to IP68 and IP69 and passed the criteria for a depth of one meter for one hour. Test reports available upon request.
- Version certified according to IEC60601-1, ANSI/AAMI/ES60601-1, CAN/CSA-22.2 No60601-1 available (24 VDC only)
- ATEX zone 22, group II 3 D approval
- Tested according to EN/UL/CSA60.601


### On request:

- Available in all RAL colors
- Other stroke lengths available
- Customized front, rear brackets and built in measures


### Contact Bansbach for any special requirements

\* The dust and water sealing of IP68/69K actuators might affect their performance in lower gear ratios

## Speed/force

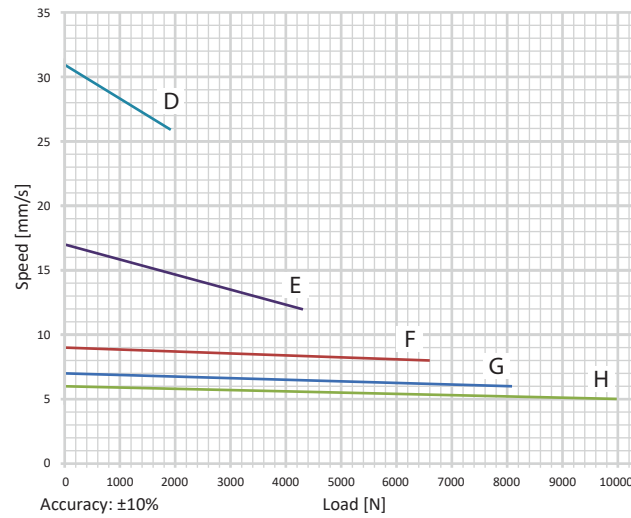


## Force/current

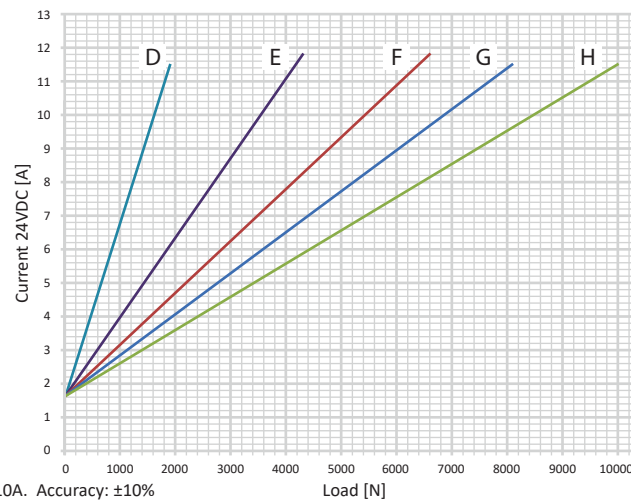

## Dimensions


Axial backlash:  
+/- 0.5mm

General  
dimensional  
variation:  
+/- 1mm

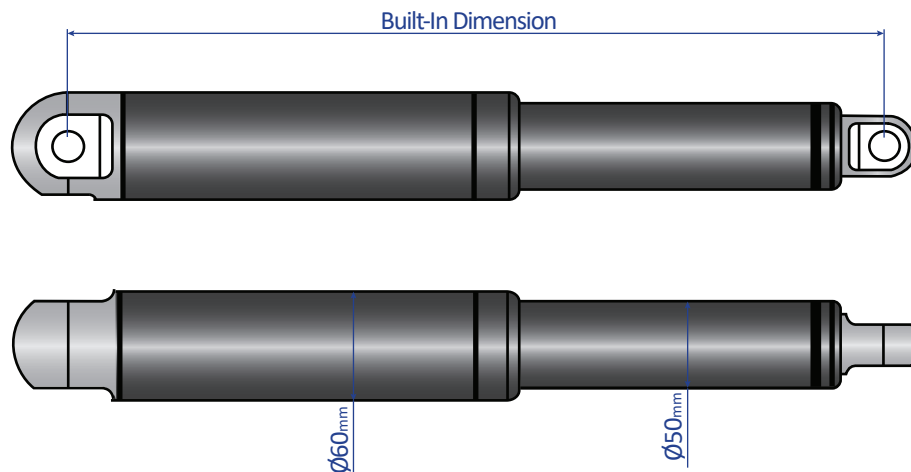


Built-In Dimension 'A'						
Gear Ratio	Standard	Clevis Rear	Hall	UL/EN60.601	Harsh Environment	Emergency lowering/spline
All Ratios	358+stroke	–	+15	+15	+25	+31/+10
Stroke length ≥ 500mm: +25mm						

## Standard Brackets

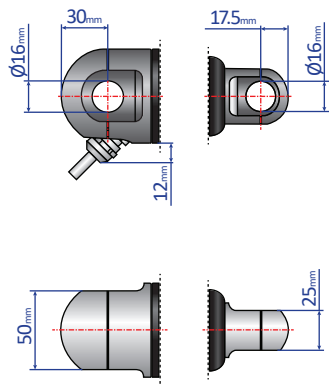


**Alu / AISI316**  
Max. static load 16800N

**Hinge Eye**  
A3 – Aluminum  
C3 – Stainless Steel

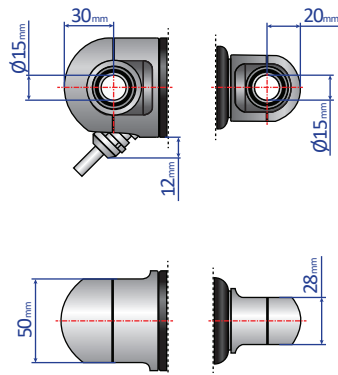

**Alu / AISI316 with spherical bearings**  
Max. static load 11000N


E2 – Aluminum

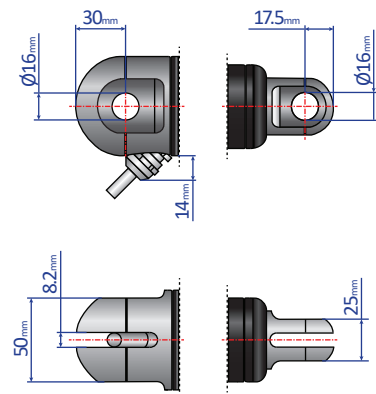

**Alu / AISI316 with clevis**  
Max. static load 16800N

F3 – Aluminum  
H3 – Stainless Steel


## Recommended Mounting Methods

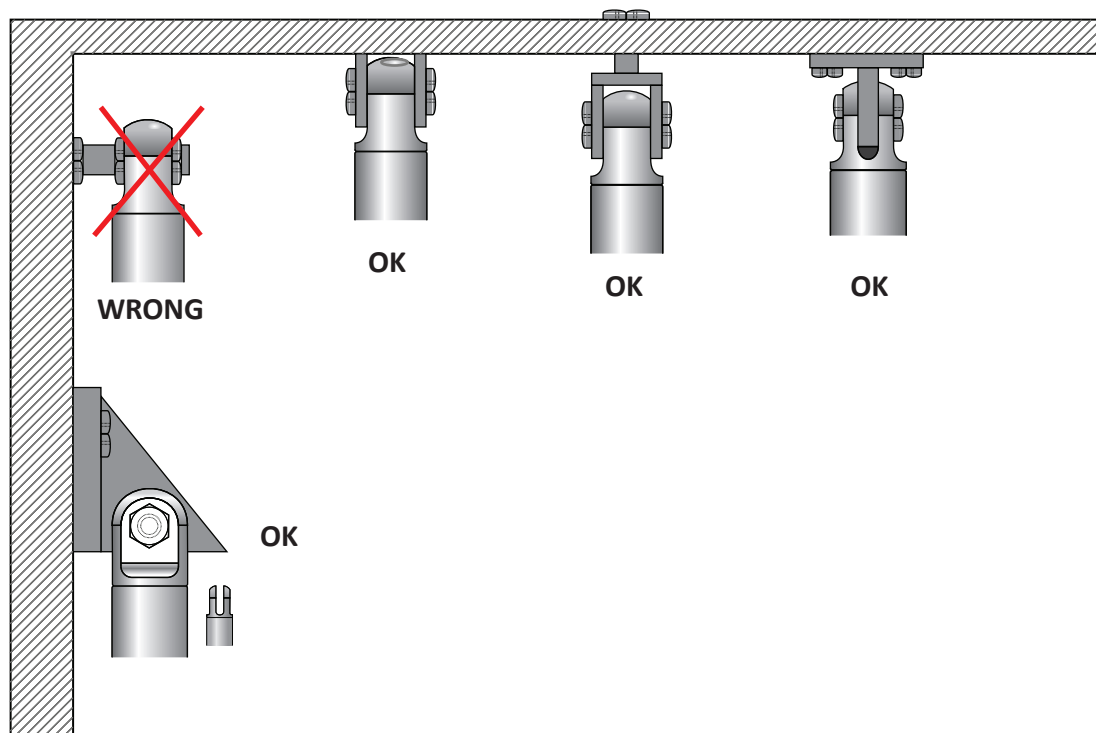

- Do not clamp actuators on tubing
- Always keep both brackets mounted in the same orientation and ensure to flush mount actuator
- Brackets must always be able to rotate on axels in mountings

easyE<sup>®</sup> 60

## easyE® 60 Item Number Combination

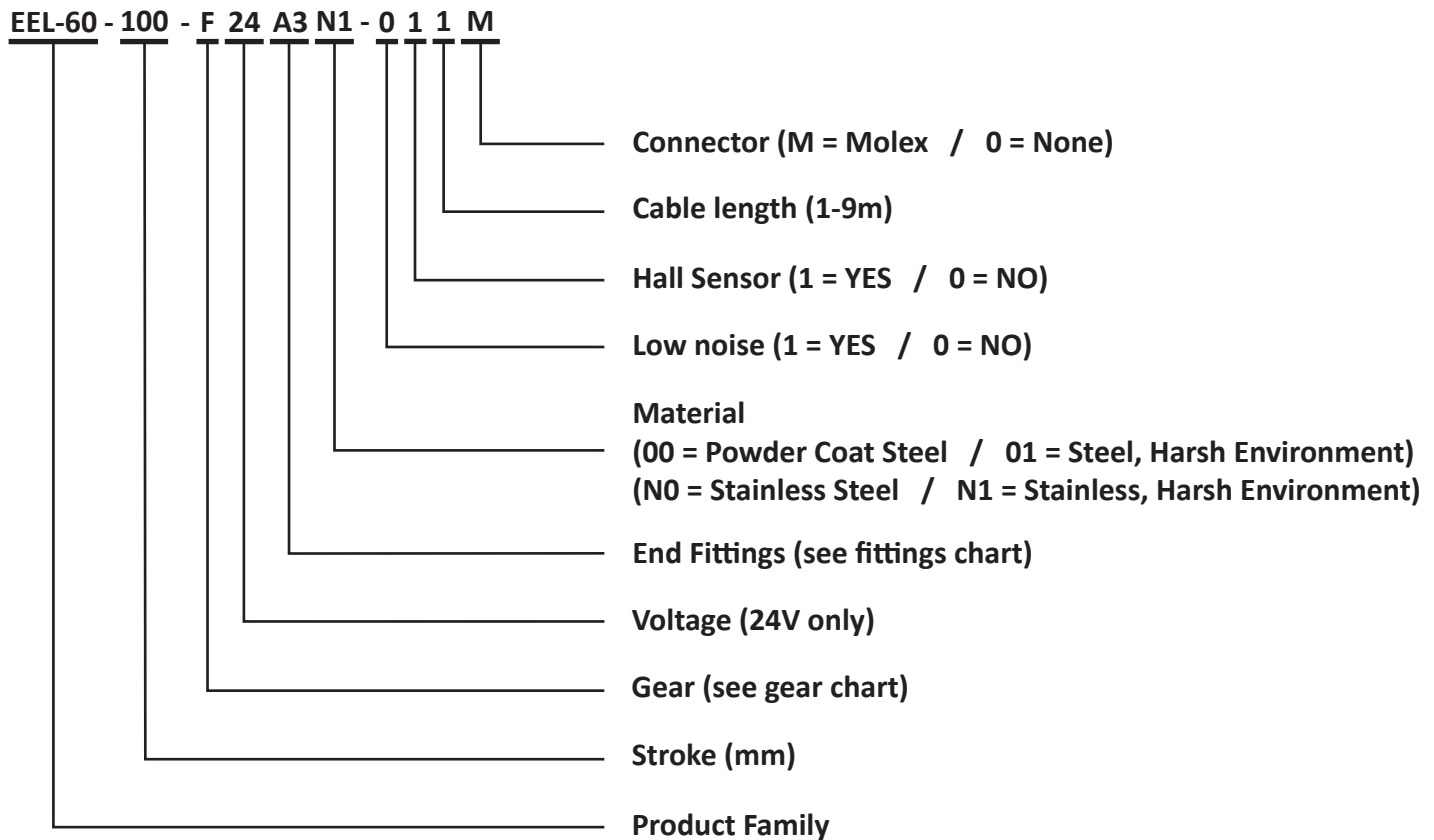

### Please Note

- Power supply without over-current protection can cause serious damage to the actuator at mechanical end-stop or when actuator is overloaded in another way
- Radial forces might have an adverse affect on the performance or lead to damage of the actuator
- Keep piston tube clean
- Longer cable lengths may cause voltage drop which affects the performance of the actuator
- For medical applications maximum ambient temperature is 48°C
- Function of the actuator is subject to the settings of the control box
- Bansbach does not have any responsibility for possible errors in this data sheet
- Specifications are subject to change without notice
- The dust and water sealing of Harsh Environment actuators might affect their performance
- All specifications are for 25°C ambient – low temperature might affect their performance
- Depending on load and application, nominal and actual stroke length may differ due to internal disc springs not being fully compressed

### Disclaimer

- Modern production processes and a certified quality system, guarantee that Bansbach products are of the highest quality standard. It is always the responsibility of the customer to examine the appropriateness of the application and environment for each product.
- Bansbach is not responsible for any errors found within this document. Information is subject to change without notice.

For more information, please visit our website at: [www.bansbach.com](http://www.bansbach.com)

### Bansbach Easylift®

50 West Drive  
Melbourne, FL 32904

Tel: (321) 253-1999  
Fax: (321) 253-5546

[sales@easylift.com](mailto:sales@easylift.com)  
[www.easylift.com](http://www.easylift.com)

**Bansbach**  
**easylift®**