

# Type ANE Automotive / Marine Limiter Fast Acting



www.optifuse.com (619) 593-5050

**Specifications:**

- **Voltage Rating:** 125 VAC, 32 VDC
- **Amperage Rating:** 35A, 40A, 50A, 60A, 70A, 80A, 100A, 120A, 125A, 130A, 150A, 175A, 200A, 225A, 250A, 275A, 300A, 350A, 400A
- **Interrupting Rating:** 2000A @32V DC


- **Construction:**  
**Body Material:** FR4  
**Terminals:** Gold-plated Brass/Copper Alloy

| Time Characteristics |               |
|----------------------|---------------|
| % of Rated Current   | Clearing Time |
| 100%                 | Min 4h        |
| 250%                 | Max 300s      |

**Recommended Mounting:**

- Optifuse Fuse Block BLC-09 to 200A
- Optifuse Fuse Block BLC-209 to 800A

**Mechanical Dimensions: Inches [mm]**

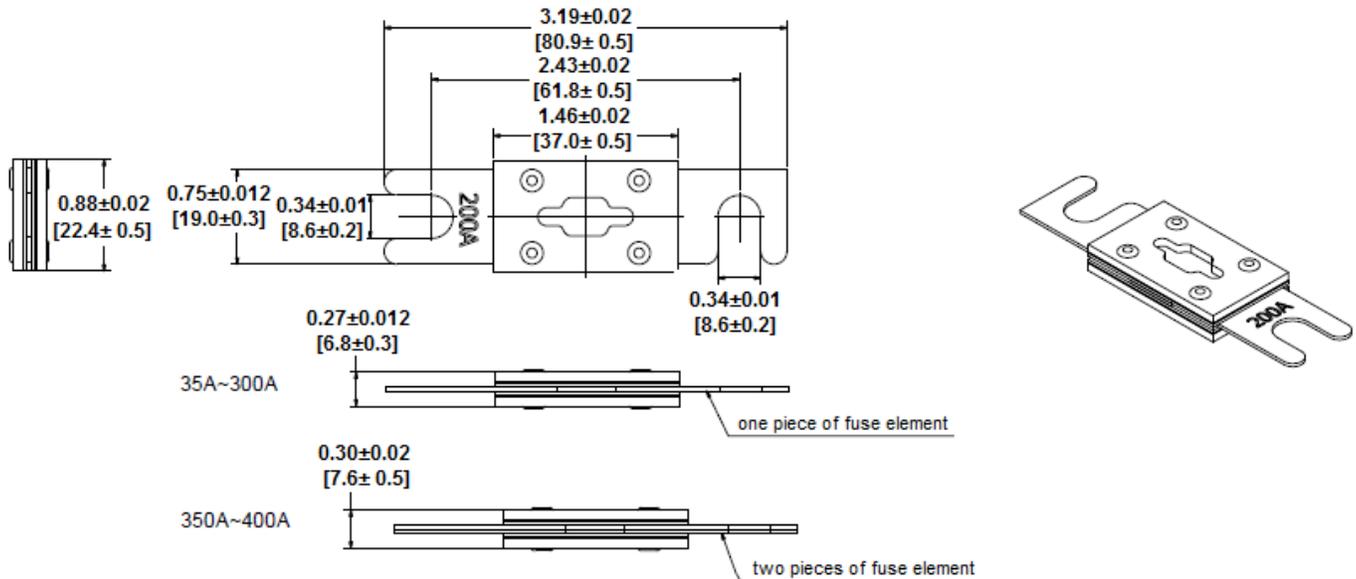

|  |  |
|--|--|
|  | <p><b>Warning:</b> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</p> |
|  | <p>-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.</p>  |

**Type ANE  
Automotive / Marine Limiter  
Fast Acting**



www.optifuse.com

(619) 593-5050

**TIME CURRENT CURVE GRAPH**

