


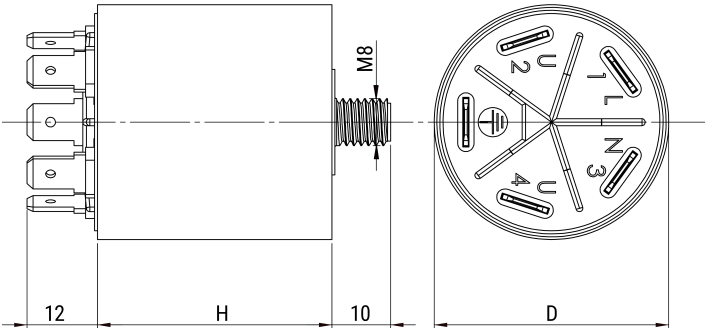

Click [here](#) for the 3D model.

| Dimensions |          |
|------------|----------|
| D          | 40mm NOM |
| H          | 50mm NOM |

| Packaging Specifications |       |
|--------------------------|-------|
| Packaging                | Bulk  |
| Packaging Quantity       | 1     |
| Typical Component Weight | 105 g |

| General Information |                           |
|---------------------|---------------------------|
| Series              | FNC                       |
| Style               | Plastic Cylinder          |
| Description         | Compact, High Performance |
| Features            | High Performance          |
| RoHS                | Yes                       |
| Qualifications      | UL, CSA                   |
| Terminal Type       | Faston                    |

| Specifications           |             |
|--------------------------|-------------|
| Voltage AC               | 275 VAC     |
| Rated Frequency          | 50-60 Hz    |
| Rated Current            | 16 A (40°C) |
| Rated Temperature        | 40°C        |
| Temperature Range        | -25/+85°C   |
| Climate Category         | 25/085/21   |
| Test Voltage DC (P to P) | 1700 VDC    |
| Test Voltage DC (P to E) | 3000 VDC    |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.