


DIMENSIONS

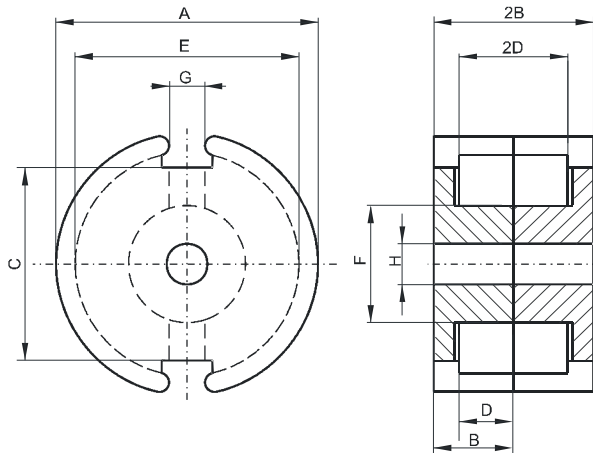

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	42.4	-0.7	+ 0.7
B	14.7	-0.05	+ 0.05
2B	29.4	-0.1	+ 0.1
C	32.0	-0.7	+ 0.7
D	10.15 Min.		
2D	20.3 Min.		
E	36.3	-0.7	+ 0.7
F	17.4	-0.3	+ 0.3
G	5.1	-0.6	+ 0.6
H	5.55	-0.15	+ 0.15
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
265.0	214.0	68.6	18200

INDUCTANCE

AL value (nH/T²)	Test conditions
9000 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

LOSS FACTOR

$\tan \delta/\mu$ ($\times 10^{-6}$)	Test conditions
< 6	100 kHz, < 0.25 mT, 25 °C
α_F ($\times 10^{-6}$)	Test conditions
-0.7 to 0.7	20 °C to 40 °C
-0.7 to 0.7	40 °C to 70 °C