
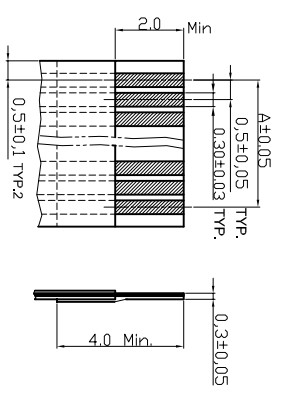


Sold Pad Pattern

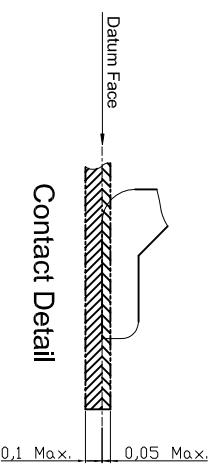

Accommodated FFC/FPC



1 2 3 4 5 6 7

NOTES:


1. Body : Nylon 6T with 30% GF. UL94V-0
Color Nature
2. Slider : Nylon 6T with 30% GF. UL94V-0
Color Black
3. Contact : Phosphor Bronze
4. Fixed tab : Brass with Matte Tin plated
5. Plating: Matte Tin plated over Nickel
6. Contact style: Downside contact

AFFC23-xx-050-SHB-X
 Packing:
 R = Tape & Reel
 T = Tube

A = 0.50x No. of Spaces
 B = A + 6.2
 C = A + 1.1
 * Available in 5 through 65 circuits

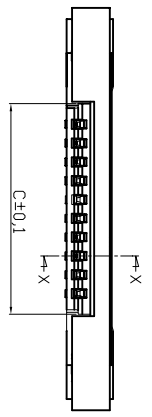

RoHS compliant
 Unit: mm



Scale	Free						
TOLERANCE							
.X	±0.15						
.XX	±0.10						
.XXX	±0.05						
DIM		TOL					
X.°	±1°						
X.X°	±X°						
Angle	TOL						

Id.	Modification	Date	Name
①	Drawn	03.08.2009	Dean
②	Change material and add circuits	21.04.2010	Dean
③	Add UL No.	13.06.2016	Amy

Date	Name
03.08.2009	Dean
13.06.2016	Amy

ASSMANN
 WSW components

Customer-No.	
ASSMANN WSW-No.	AFFC23-xx-050-SHB-X
Drawing-No.	ASS 3629 CO
Replace	rev03
	SHEET 1/2

1 2 3 4 5 6 7

H G F E D C B A

