


SMD Power Inductor

CDPQ2419



Description

- Ferrite core construction.
- Magnetically shielded.
- L×W×H: 27.5×26.5×20.0mm Max.
- Product weight: 38g(Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C


Packaging

- Pallet packaging.
- 40pcs per pallet, 200pcs per package.

Applications

- High Current Inductor for DC/DC converters in distributed power systems and PV inverters etc.

Dimension - [mm]

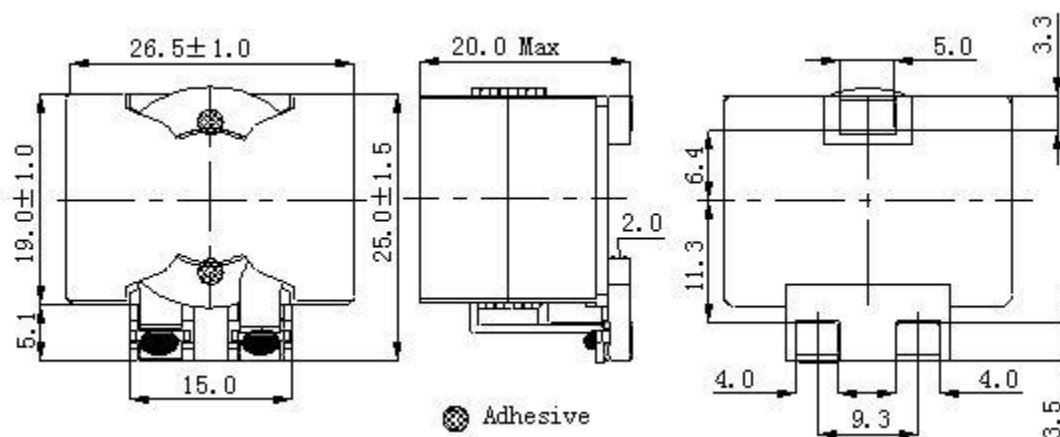


SMD Power Inductor


CDPQ2419



Recommended Land pattern - [mm]

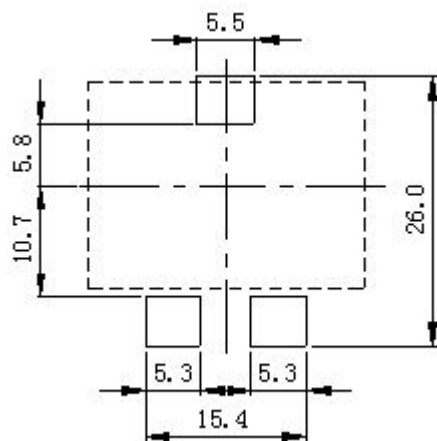

Wire Connection



SMD Power Inductor

CDPQ2419



Electrical Characteristics



Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2	Temperature Rise Current (A) Max.(Typ.) ※3
CDPQ2419NP-3R3LB-AL51	3.30 $\pm$ 15%	2.86 (2.60)	(100)	(28.00)
CDPQ2419NP-4R7LB-AL73	4.70 $\pm$ 15%	2.86 (2.60)	(72.00)	(28.00)
CDPQ2419NP-100LB-AL156	10.00 $\pm$ 15%	2.86 (2.60)	(35.00)	(28.00)
CDPQ2419NP-150LB-AL234	15.00 $\pm$ 15%	2.86 (2.60)	(24.00)	(28.00)
CDPQ2419NP-220LB-AL343	22.00 $\pm$ 15%	2.86 (2.60)	(16.00)	(28.00)

※1 Measuring condition at 100kHz 0.1V.

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 20% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Solder Reflow Condition

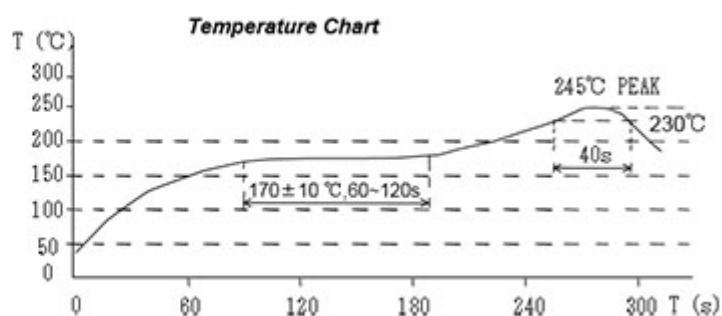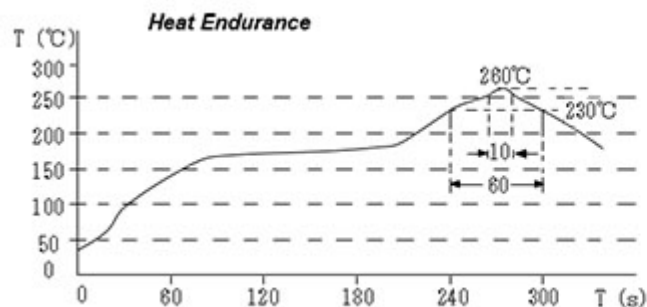





Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT


1. CDPQ2419NP-3R3LB-AL51

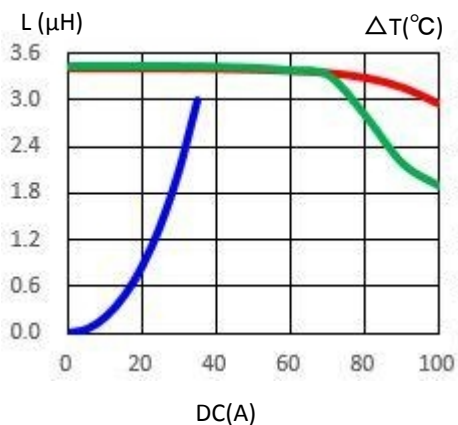


2. CDPQ2419NP-4R7LB-AL73

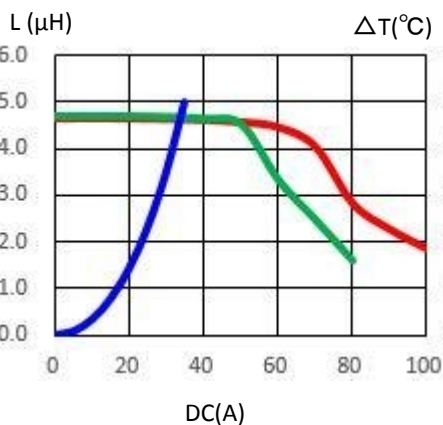


3. CDPQ2419NP-100LB-AL156

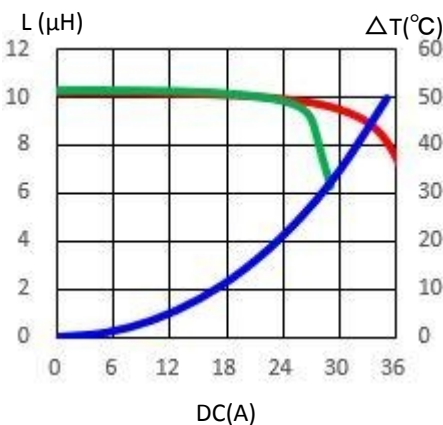

4. CDPQ2419NP-150LB-AL234

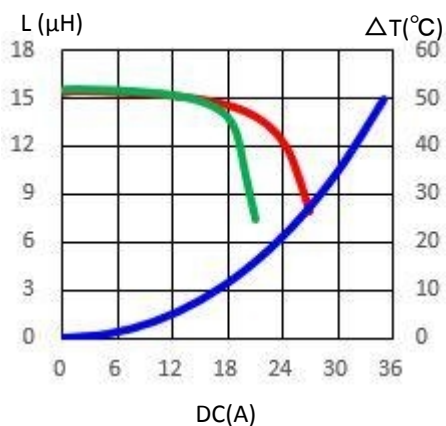

5. CDPQ2419NP-220LB-AL343

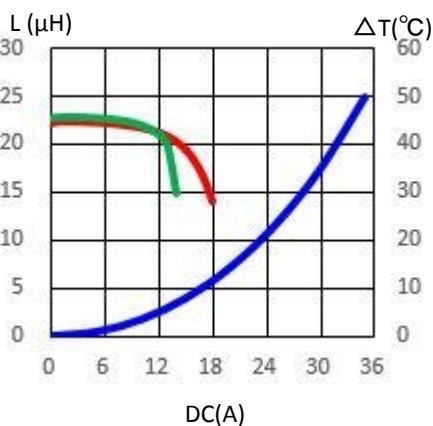

For sales office information, please [click here](#) to visit our website.