1-644042-2 - ACTIVE


MTA 100

TE Internal #: 1-644042-2 Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100

View on TE.com >

Connectors > Rectangular Connectors > Standard Rectangular Connectors >

Nylon Gold Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

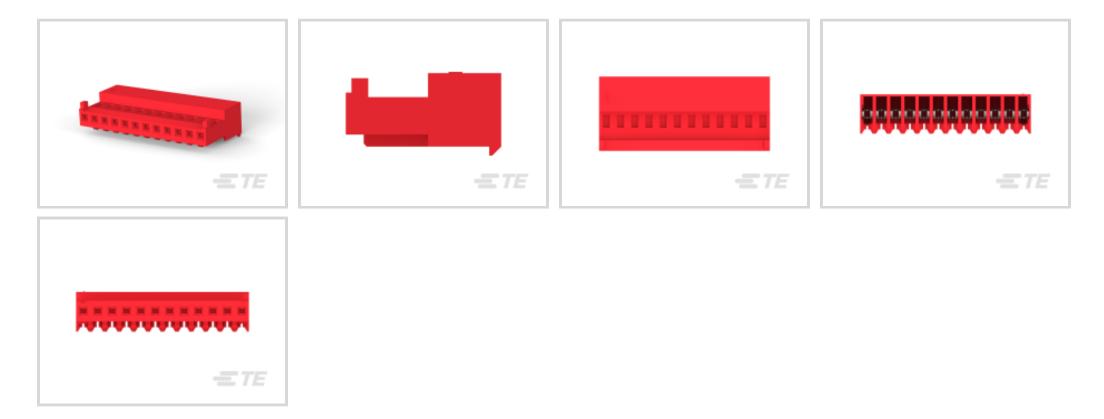

Connector Product Type: Connector Assembly

Connector & Housing Type: Receptacle

Mating Alignment: With

Mating Alignment Type: Polarization

Mating Retention: With

All Nylon Gold Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100 (74)



Features

Product Type Features

| Compatible With Discrete Wire Type | Stranded | |
|---|--------------------|--|
| Connector Product Type | Connector Assembly | |
| Connector & Housing Type | Receptacle | |
| Connector System | Wire-to-Board | |
| Insertion Force Type | Normal | |
| Sealable | No | |
| Connector & Contact Terminates To | Wire & Cable | |
| | Whe de Cable | |
| Configuration Features | | |
| | 12 | |
| Configuration Features | | |
| Configuration Features Number of Cavities | 12 | |

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



Electrical Characteristics

| 0501/4.0 | | |
|--|--|--|
| 250 VAC | | |
| | | |
| Receptacle | | |
| Tin | | |
| Nickel | | |
| Gold, Gold Flash over Palladium Nickel | | |
| With | | |
| 5 A | | |
| | | |
| Insulation Displacement (IDC) | | |
| | | |
| Locking Lance | | |
| With | | |
| Polarization | | |
| With | | |
| Locking Ramp | | |
| | | |

Connector Mounting Type

Cable Mount (Free-Hanging)

Housing Features

| Housing Material | Nylon 6/6 | |
|-----------------------------|----------------------------|--|
| Housing Color | Red | |
| Centerline (Pitch) | 2.54 mm[.1 in] | |
| Dimensions | | |
| Connector Height | 6.99 mm[.275 in] | |
| Product Width | 13.21 mm[.52 in] | |
| Product Length | 30.48 mm[1.2 in] | |
| Wire Size | .34 mm² | |
| Usage Conditions | | |
| Operating Temperature Range | -55 - 105 °C[-67 - 221 °F] | |
| Operation/Application | | |
| Shielded | No | |
| Circuit Application | Signal | |

C For support call +1 800 522 6752

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



Industry Standards

| CSA Rating | LR 7189 | |
|--|---|--|
| UL Rating | Recognized | |
| Compatible With Agency/Standards Products | CSA, UL | |
| Compatible With Approved Standards Products | UL E28476 | |
| UL Flammability Rating | UL 94V-2 | |
| Packaging Features | | |
| Packaging Quantity | 500 | |
| Packaging Method | Bag/Box | |
| Product Compliance For compliance documentation, visit the product page on TE.com> | | |
| EU RoHS Directive 2011/65/EU | Compliant | |
| EU ELV Directive 2000/53/EC | Compliant | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 | |

(240)

Does not contain REACH SVHC

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Halogen Content

Solder Process Capability

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100



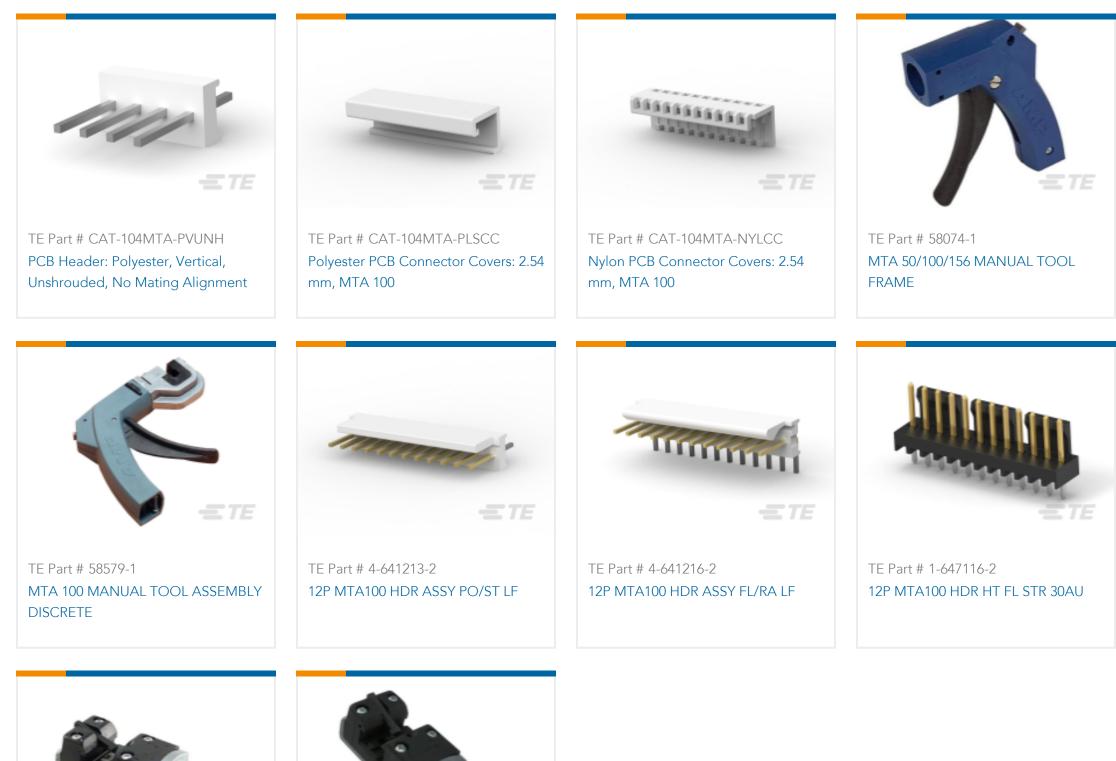

TE Part # 58246-3 MTA 100 CRIMP HEAD PRODUCTION RBBN CABLE



TE Part # 58246-2 MTA 100 CRIMP HEAD PRODUCTION DISCRETE

Also in the Series | MTA 100

| | A Contraction of the second se | | |
|-----------------------------|--|-----------------------|---------------------------------|
| Connector Caps & Covers(69) | Connector Contacts(8) | Connector Hardware(1) | Insertion & Extraction Tools(2) |



Customers Also Bought

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Alignment, Polarization Mating Alignment Type, Mating Retention, MTA 100





Documents

Product Drawings 12P MTA100 CONN ASSY 30AU

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1-644042-2_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-644042-2_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-644042-2_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Product Specifications Product Specification

English

Agency Approvals Agency Approval Document

English