



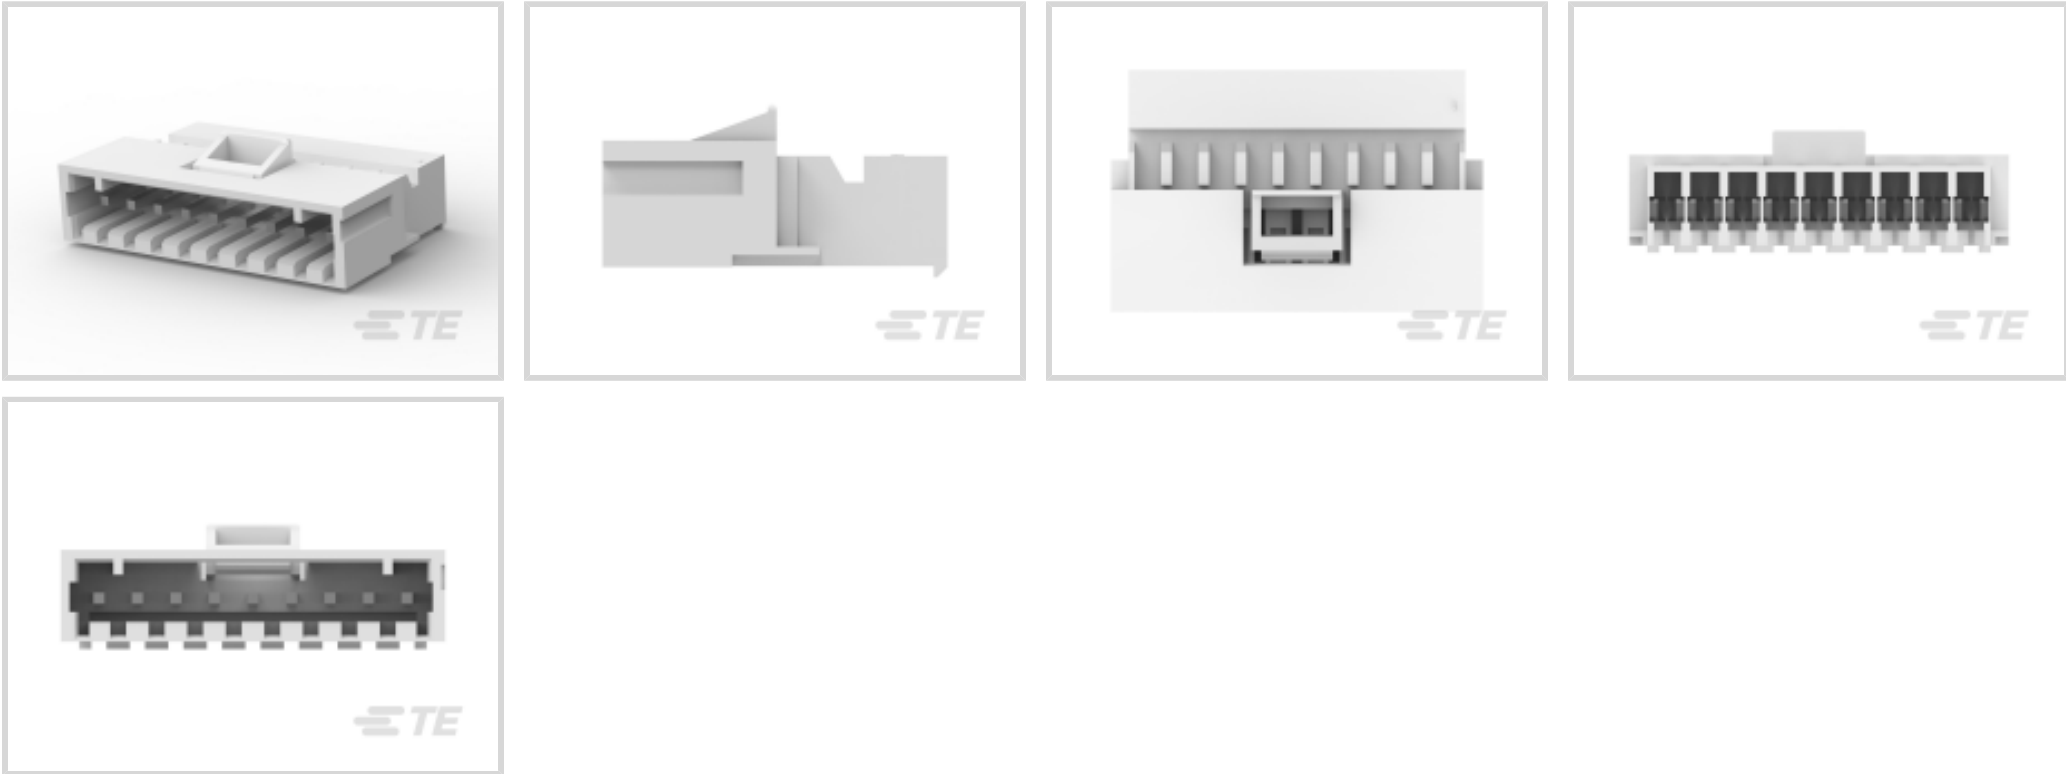
MTA 156

TE Internal #: 3-641438-9

Rectangular Power Connectors, Connector Assembly, Plug, Wire-to-Wire, 9 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-2, MTA 156

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Connector Assembly**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **9**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Compatible With Discrete Wire Type	Solid, Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	9
Number of Power Positions	9
Number of Signal Positions	0
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features



Cable Exit Angle	90°
Connector Profile	Standard

Contact Features

Contact Layout	Inline
Contact Underplating Material Thickness	50 µm[1.27 µin]
Wire Contact Termination Area Plating Thickness	2.03 µm[80 µin]
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	With
Contact Type	Pin
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 µm[80 µin]

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Strain Relief	With
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
Contact Retention Type Within Housing	Locking Lance
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Wire & Cable IDC Installation Type	Closed End
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	White



Housing Material	Nylon
Dimensions	
Connector Height	12.37 mm
Product Length	39.62 mm
Compatible Insulation Diameter Range	2.41 mm[.095 in]
Wire Size	.2 mm ²
Usage Conditions	
Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	900
Packaging Method	Package
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



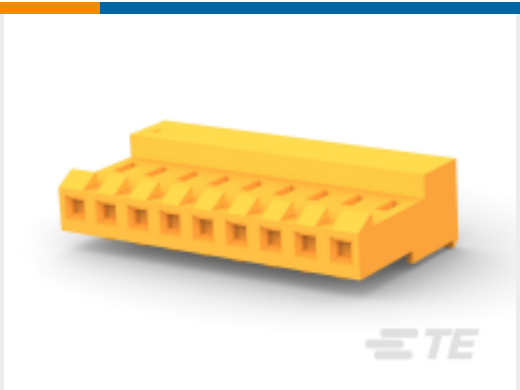
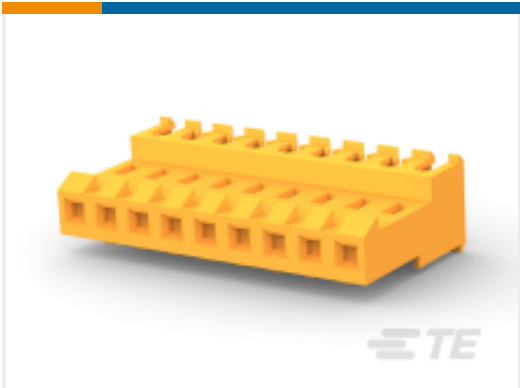
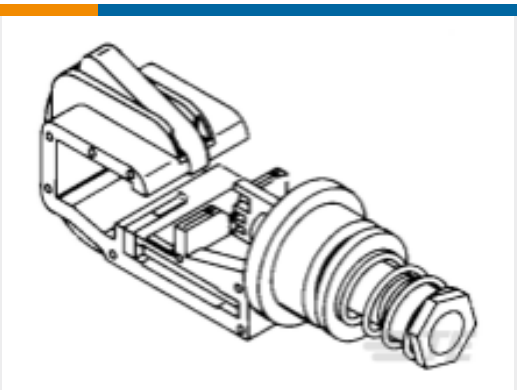
Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-103156-WBHSM Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156	 TE Part # 58074-1 MTA 50/100/156 MANUAL TOOL FRAME	 TE Part # 3-640426-9 09P MTA156 CONN ASSY 18AWG ORA	 TE Part # 3-640428-9 09P MTA156 CONN ASSY 22AWG RED
 TE Part # 3-640599-9 09P MTA156 CONN ASSY 18AWG ORA	 TE Part # 3-640427-9 09P MTA156 CONN ASSY 20AWG YEL	 TE Part # 3-640429-9 09P MTA156 CONN ASSY 24AWG WHT	 TE Part # 640551-9 09P MTA156 COVER
 TE Part # 643067-9 09P MTA156 MOLDED COVER	 TE Part # 643071-9 09P MTA156 FD-THRU COVER	 TE Part # 640643-9 09P MTA156 COVER F/T	 TE Part # 58082-1 MTA 156 CRIMP HEAD PRODUCTION POSTED



TE Part # 3-640600-9
09P MTA156 CONN ASSY 20AWG LF

TE Part # 3-640430-9
09P MTA156 CONN ASSY 26AWG BLU

TE Part # 3-640601-9
09P MTA156 CONN ASSY 22AWG LF

TE Part # 3-640602-9
09P MTA156 CONN ASSY 24AWG LF

TE Part # 3-644860-9
09P MTA156 CONN ASSY 18AWG LF

Also in the Series | MTA 156

Connector Caps & Covers(89)

Connector Contacts(4)

Connector Hardware(2)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(314)

Rectangular Power Connectors(691)

Standard Rectangular Connectors(336)

Customers Also Bought

TE Part # 4-640440-0
10P MTA100 CONN ASSY 22AWG RED

TE Part # 770233-1
CMNL IDC COVER

TE Part # 7-520365-2
ULTRA-FAST .110/.125 ASY REC 26-22 TPBR

TE Part # 643067-9
09P MTA156 MOLDED COVER





TE Part # 770156-4
4P CMNL IDC PLUG 20AWG YEL V2



TE Part # 214049-E
SRCA 1,27 4 F 1 I2426 137 E1 094 1,07 TR



TE Part # 214157-E
SRCA 1,27 2 F 1 I2426 137 E1 094 1,07 TR



TE Part # 474016-E
DRCB 2,54 10 M SMD * 137 E012 094 GURT *



TE Part # 484084-E
SRCA 1,27 10 F 1-KS IDC22 137 E1 094 1,2



TE Part # 364215-E
SRCBUG A 2,54 2 3 CSI 165 E1 ADV J 2 324

Documents

Product Drawings

09P MTA156 PSTD CONN ASSY WHT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-641438-9_R.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-641438-9_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-641438-9_R.3d_stp.zip

English

Customer View Model

ENG_CVM_3-641438-9_M.3d_igs.zip

English

Customer View Model

ENG_CVM_3-641438-9_M.3d_stp.zip

English

Customer View Model

ENG_CVM_3-641438-9_M.2d_dxf.zip

English

3D PDF

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

Product Specification

English

Agency Approvals

UL

English