

# HKP

## 1/4" x 1 1/4" Panel-mount fuse holders



### Product features

- For 1/4" x 1 1/4" (6.3 mm x 32 mm) fuses
- Maximum panel thickness 5/16" (7.9 mm) thick
- Bayonet-type knob
- Vibration resistant
- Military version is designated FHN26G1
- Standard plastic nut
- Optional metal nut
- Cap – BK-9435-1-2
- Neoprene washer – 9732

### Agency information

- UL Recognized: IZLT2, E14853
- CSA Component Acceptance: Class 6225-01, File 47235
- CE (HKP, HKP-L, HKP-W, HKP-OO)

### Environmental data

- Temperature rating (RTI): The mounting body for all devices has a temperature rating of 150 °C. The knob for these devices are molded plastic with a temperature rating of 150 °C.
- Meets UL 94HB
- Terminal Strength: 5 pounds
- Torque: Mounting – 20 inch-pound
- Salt Spray (corrosion): Test condition B

### Ordering information

- Specify packaging prefix and product code
- Optional metal nut, order separately part number 1A4806-2 (100 parts minimum)

| Product code | Specifications  |                |                |
|--------------|---|----------------|----------------|
|              | Feature   | Voltage rating | Current rating |
| HKP-R        | Standard  | 250 V          | 30 A           |
| HKP-BBHH-R   | 1/4" Quick-Connects, nut and washer assembled                                 | 250 V          | 15 A           |
| HKP-HH-R     | 1/4" Quick-Connects   | 250 V          | 15 A           |
| HKP-L-R      | 2250 stand-off barrier  | 250 V          | 30 A           |
| HKP-LW-HH-R  | Drip-proof knob, 2250V stand-off barrier and 1/4" quick connects <sup>1</sup> | 250 V          | 15 A           |
| HKP-OO-R     | Snap-lock   | 250 V          | 30 A           |
| HKP-W-R      | Drip-proof knob <sup>1</sup>  | 250 V          | 30 A           |

1. IP53 rating for exposed locations





Powering Business Worldwide



Dimensions - in (mm)

Drawing Not to Scale

HKP-BBHH-R, HKP-HH-R, HKP-LW-HH-R

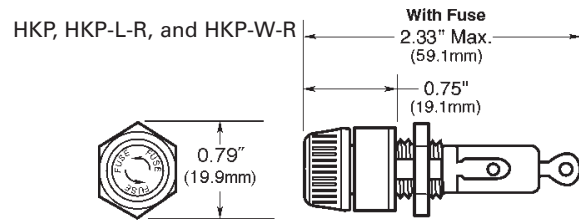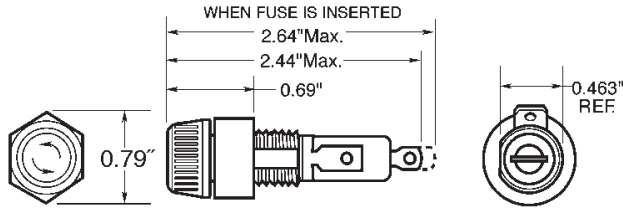


Punched Mounting Hole

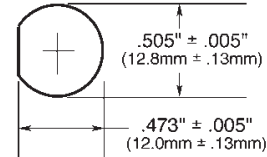

| Component | Material         |
|-----------|------------------|
| Terminal  | Tin-Plated Brass |
| Body      | Thermoset        |
| Cap       | Thermoset        |
| Nut       | Thermoplastic    |

HKP-OO-R

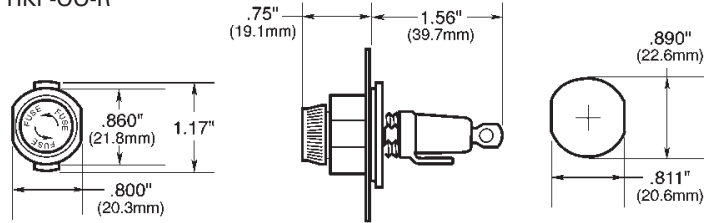

| Packaging             |   |
|-----------------------|---|
| Packaging code prefix | Description   |
| BK-                   | 100 fuseholder components packed separately into a carton |

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2023 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2106 PCN23014M  
July 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

