


Mechanical Dimensions: Inches [mm]

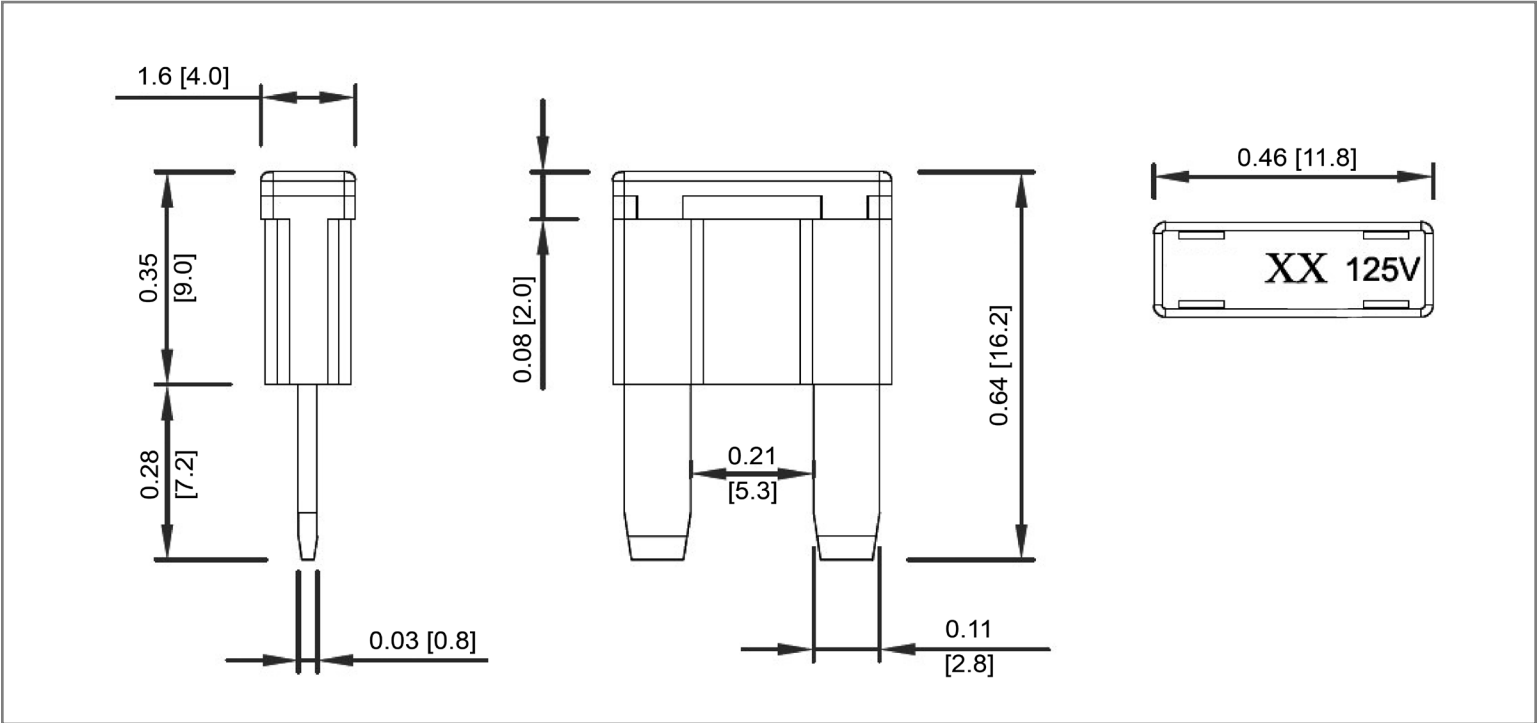

Part Numbers Information

Amperage	Body Color	Bulk Part #
1	Black	ANM125-M-1A
2	Grey	ANM125-M-2A
3	Violet	ANM125-M-3A
4	Pink	ANM125-M-4A
5	Tan	ANM125-M-5A
6	Light Red	ANM125-M-6A
7	Light Orange	ANM125-M-7A
7.5	Brown	ANM125-M-7.5A
8	Light Yellow	ANM125-M-8A
10	Red	ANM125-M-10A
12	Light Pink	ANM125-M-12A
15	Blue	ANM125-M-15A


Electrical Specifications

Voltage Rating	125VDC
Interrupting Rating	1000A @ 125VDC


Material Specifications

Body Material	Nylon with 25% Fiberglass (UL94V-0)
Terminal Material	Copper Alloy, Tin Plated
Ignition Protected	
Sand Filled	

Time vs Percent of Rated Current

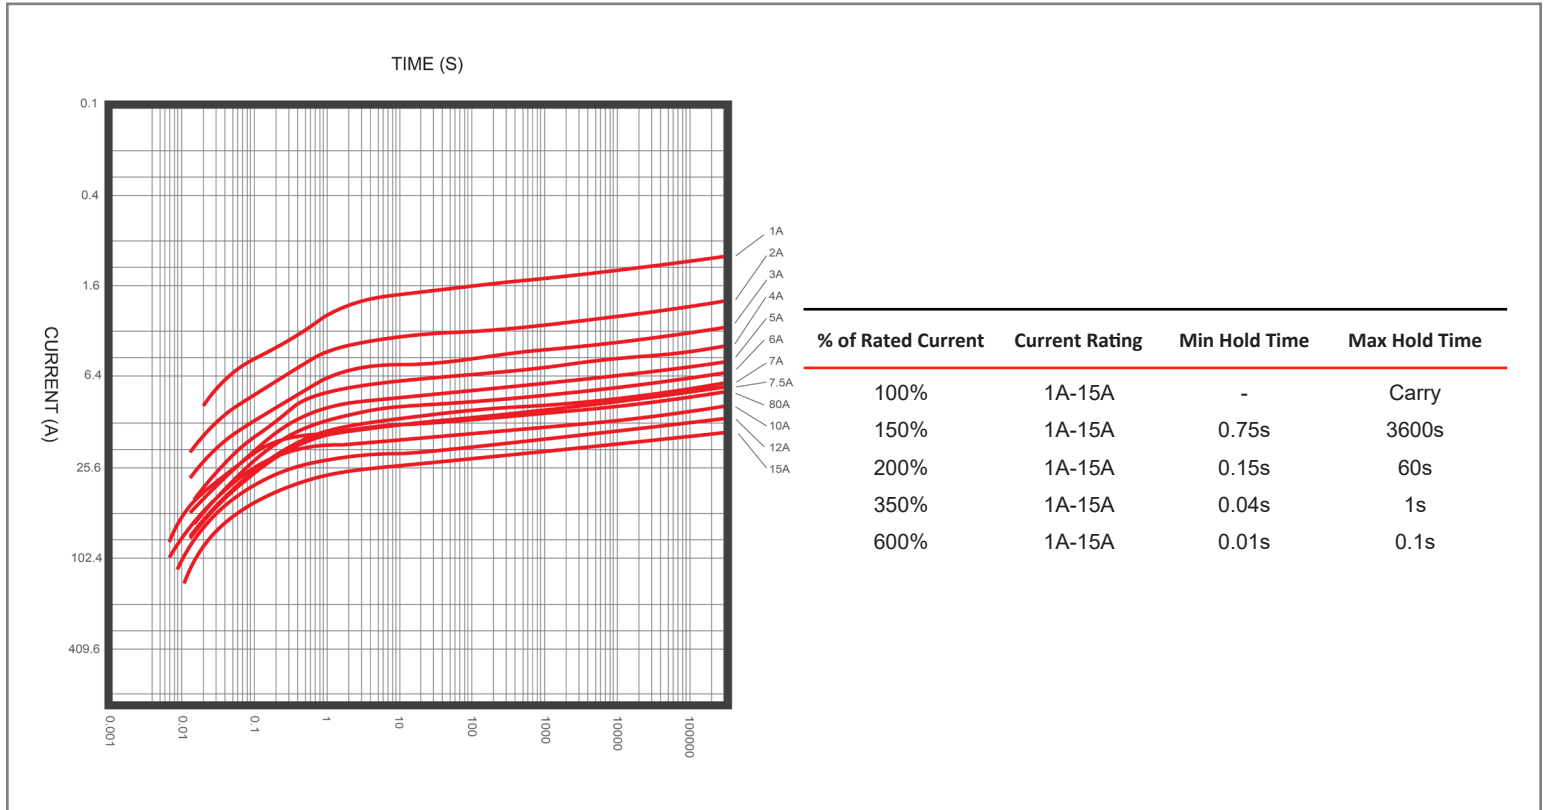

Effect of Ambient Temperature on Current-Carrying Capacity

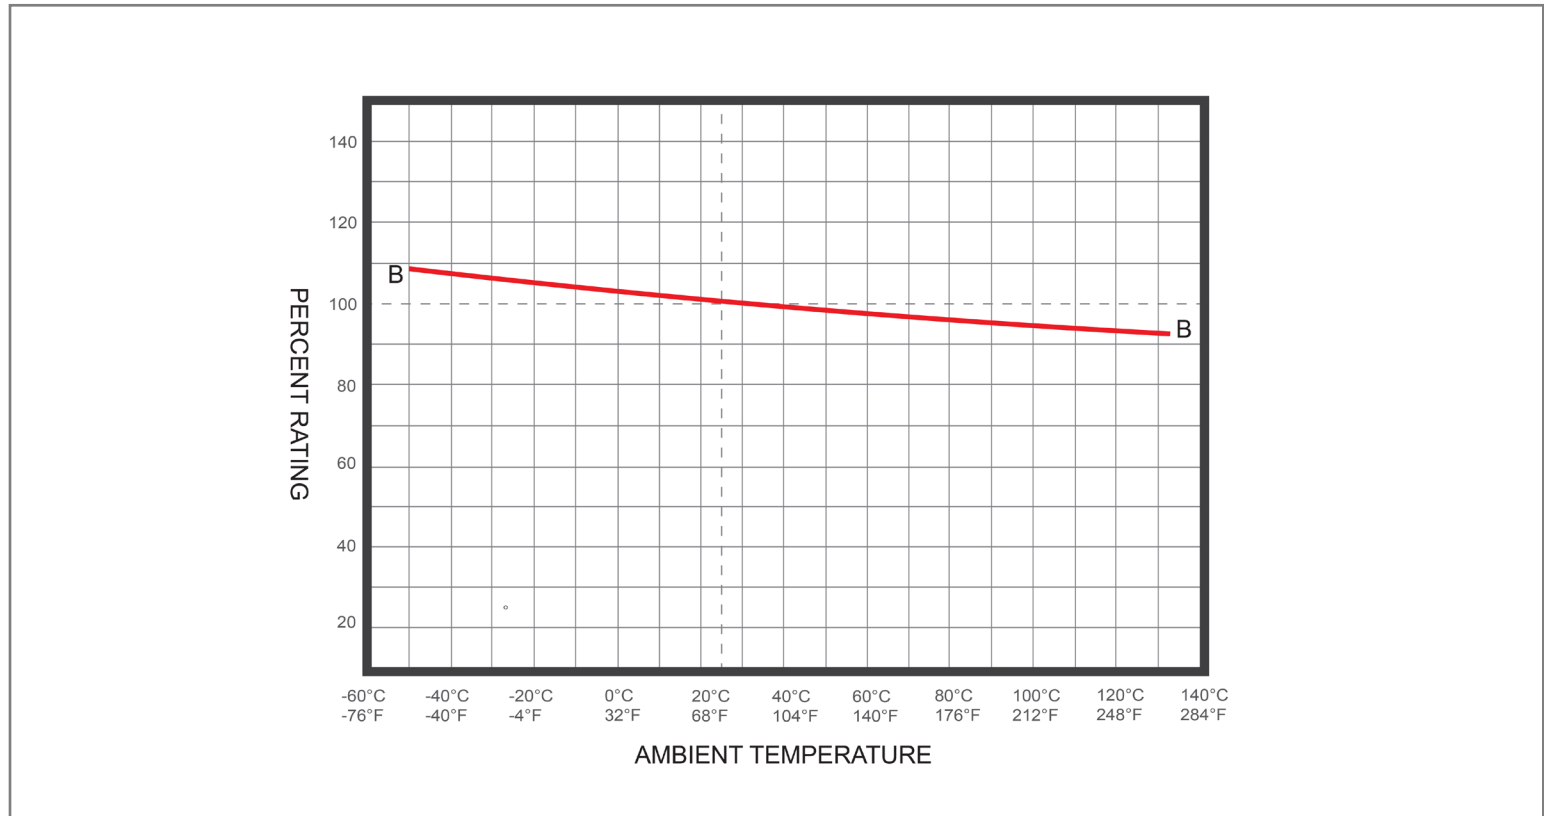

Rev Date of issue Revision Notes

Designed Approved

C

03-27-2023

Initial Drawing

RC

OF