
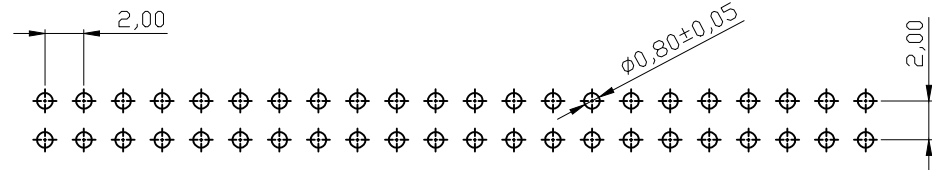


1 2 3 4 5 6 7

A

A

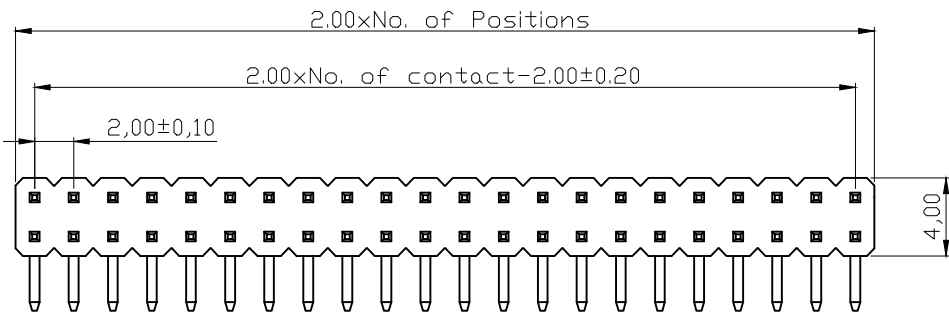

Recommended PCB Layout

B

B

C

C

**NOTES:**

**MATERIAL**

- 1. Insulator Material: PBT+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating :  
 A-SL200-DA-GxxD: Gold flash over Ni  
 A-SL200-DA-ZxxD: Sn over Ni

**ELECTRICAL**

- 1. Current Rating : 1.5Amps/contact max
- 2. Withstand Voltage : 1000V AC/minute
- 3. Contact Resistance : 20mΩ/contact max
- 4. Insulation Resistance: 1000MΩ min at Voltage=100V

**ENVIRONMENTAL**



- 1. Operation Temperature: -40°C to +105°C
- 2. Soldering temperature: +220°C max
- 3. Mechanical life cycle: min.200
- Packing : PE Bag

**Dimension antitheses list**

A	B	D
2.80	4.00	0.75

D

D

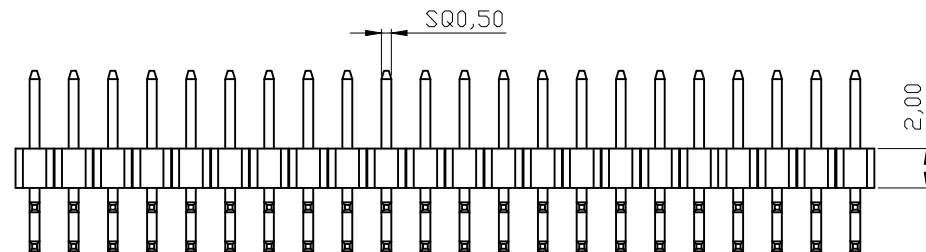

E

E

F

F

**RoHS compliant**  
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE		⑤	Update the current rating	17.09.2012	Amy	Drawn	02.02.2009	Dean
X.	±0.50	④	Change of Plant	30.01.2012	Lucas	Approved	17.09.2012	Jackey
X.X	±0.30	③	Sheet 2 cancelled	21.12.2009	Dean			
X.XX	±0.20	②	Sheet 2 added	09.09.2009	Schulz			
X.XXX	±0.10	①	Drawn	02.02.2009	Dean			
DIM	TOL							
Angle	±5°	Id.	Modification	Date	Name			

ASSMANN WSW-No. A-SL200-DA-xxxD

Drawing-No. ASS 3341 CO rev05

Replace Sheet

G

G

H

H

1 2 3 4 5 6 7