

1

2

3

4

5

6

7

NOTES:

MATERIAL

- 1.Pin: Brass, see order code
- 2.Insulator Material: PPS, UL94V-0






ELECTRICAL

- 1.Current Rating: 3.0AMPs/contact max
- 2.Contact Resistance: 10mΩ max
- 3.Dielectric strength: 500V min

ENVIRONMENTAL

- 1.Operation Temperature: -40°C to +105°C
- 2.Soldering Temperature:+255°C
- 3.Packing : see order code

Order code:

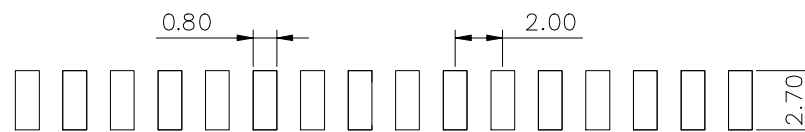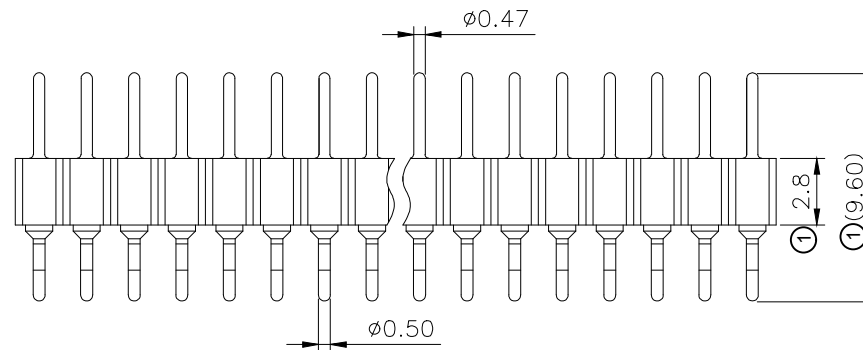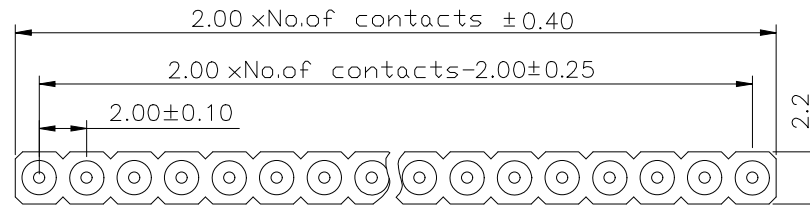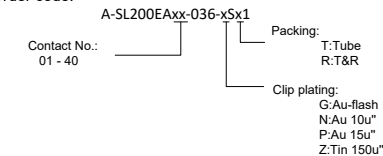

Recommended P.C.B Layout

Scale	Free					Date	Name	Description:		
TOLERANCE						Drawn	30.11.2021	Daniel	Pin Header	
X.	±0.35					Approved	29.03.2023	Daniel	ASSMANN WSW-No.	
X.X	±0.25								A-SL200EAxx-036-xSx1	
X.XX	±0.20									
X.XXX	±0.15	①	Modify tolerance	29.03.2023	Daniel			Drawing-No.	ASS 9114 CO	rev01
DIM	TOL	②	Drawn	30.11.2021	Daniel			Customer-No.	SHEET	1 / 1
Angle	TOL	Id.	Modification	Date	Name					

RoHS compliant

Unit:mm

1

2

3

4

5

6

7

SV5143