

PRODUCT NUMBER

87610-YXXLF

RoHS COMPATIBLE, SEE NOTE 7

PLATING

2 = 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL

UNDERPLATE : 1.27µm Ni MIN

NOTES:

- 1 - HOUSING MAT'L : GLASS FILLED THERMOPLASTIC. UL94V-0 COLOR: BLUE
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm

NO RIGHT POLARIZATION FOR POS 04, 06, 08.

- 5 - NO LEFT POLARIZATION FOR POS 04, 06, 08, 14.

- 6 - RETENTION LEGS IN THE CENTER OF THE CONNECTOR.

- 7 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.

b - MANUFACTURING PROCESS COMPATIBILITY






- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.

c - LABELLING:

- MEETS PACKAGING SPECS AS PER GS-14-920

- d - LEGAL STATEMENT: SEE GS-47-0004

TOTAL NUMBER OF POSITIONS	
06	26
08	34
10	40
14	44
16	50
18	60
20	64

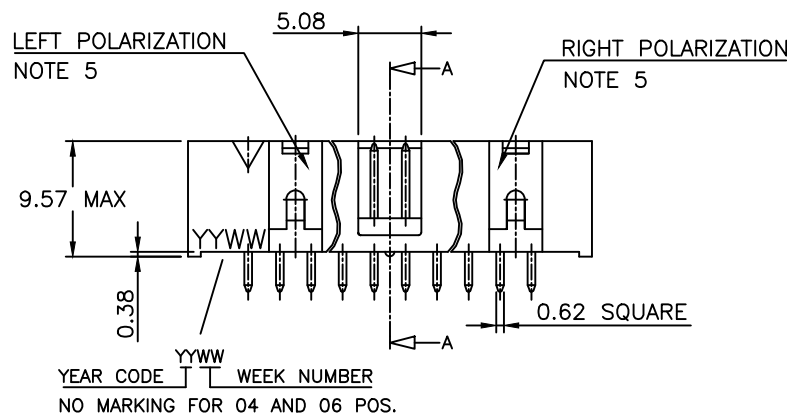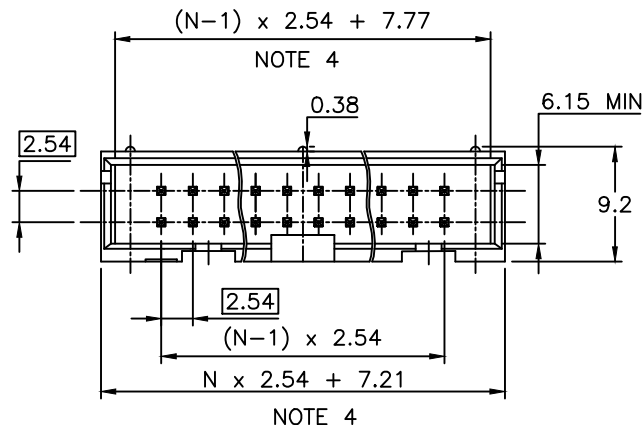

mat'l. code				surface		tolerance		projection		product family				
SEE NOTES				ISO 1302		ISO 406 ISO 1101				QUICKIE				
ltr	ecr	no	dr	date	tolerances unless otherwise specified					title				
K	F07	0198	LMU	07.05.30	angles	linear	.X ±0.3				SHR.LP.HEADER STR RETENTION LEGS			
L	F08	0148	YOV	08.04.11			.XX ±0.13							
M	B	19071	LMU	14.10.15			.XXX ±0.05							
N	B	19094	LMU	14.10.16	dr	DLE		01.01.24			dwg no		sheet 1 of 1	size
H	F04	0389	JCO	04.12.22	enrg	JCO		04.12.20			87610		A3	
J	F06	0228	LMU	06.07.18	appd	JCO		04.12.22			type		CUSTOMER Drawing	
sheet	revision													
index	sheet													