



TE Internal #: 1-440054-1

PCB Mount Header, Vertical, Wire-to-Board, 11 Position, 2 mm [.079 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Signal, Natural

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > AMP HPI 2.0 mm Headers



Connector System: **Wire-to-Board**

Number of Positions: **11**

Number of Rows: **1**

Centerline (Pitch): **2 mm [ .079 in ]**

PCB Mount Orientation: **Vertical**

[All AMP HPI 2.0 mm Headers \(205\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector System                  | Wire-to-Board         |
| Header Type                       | Partially Shrouded    |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type       | PCB Mount Header      |

Configuration Features

|                       |          |
|-----------------------|----------|
| Number of Positions   | 11       |
| Number of Rows        | 1        |
| PCB Mount Orientation | Vertical |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Body Features

|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|



Contact Features

|  |                  |
|--|------------------|
| Contact Mating Area Length                           | 3.35 mm[.131 in] |
| Mating Square Post Dimension                         | .5 mm[.02 in]    |
| PCB Contact Termination Area Plating Material Finish | Bright           |
| Contact Shape & Form                                 | Square           |
| Contact Mating Area Plating Material Finish          | Bright           |
| PCB Contact Termination Area Plating Material        | Tin              |
| Contact Base Material                                | Brass            |
| Contact Mating Area Plating Material                 | Tin              |
| Contact Type   | Pin              |
| Contact Current Rating (Max)                         | 3 A              |

Termination Features

|   |                       |
|---|-----------------------|
| Square Termination Post & Tail Dimension    | .5 mm[.02 in]         |
| Termination Post & Tail Length              | 3.4 mm[.134 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

|                          |              |
|--------------------------|--------------|
| Mating Alignment Type    | Polarization |
| Mating Retention         | Without      |
| PCB Mount Retention Type | Kinked Tines |
| Connector Mounting Type  | Board Mount  |
| Mating Alignment         | With         |
| PCB Mount Alignment      | Without      |
| PCB Mount Retention      | With         |

Housing Features

|                    |               |
|--------------------|---------------|
| Housing Material   | Nylon 66 GF   |
| Centerline (Pitch) | 2 mm[.079 in] |

Dimensions

|                             |                            |
|-----------------------------|----------------------------|
| Connector Length            | 24 mm[.945 in]             |
| Connector Height            | 6.05 mm[.238 in]           |
| Connector Width             | 4.7 mm[.185 in]            |
| PCB Thickness (Recommended) | 1 – 1.6 mm[.039 – .063 in] |

Usage Conditions

|  |  |
|--|--|
|  |  |
|--|--|



|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -25 – 85 °C[-13 – 185 °F] |
|-----------------------------|---------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 300 |
| Packaging Method   | Bag |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free  |
| Solder Process Capability                     | Wave solder capable to 240°C   |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-440129-1  
2.0MM,HSG,11POS

Customers Also Bought



TE Part #327717  
PIDG SPD 22-16 COMM 22-18MIL 4



TE Part #440054-5  
AMP HPI 2.0 mm Headers




TE Part #9-1534904-4  
CONNECTOR HSG 94 POS.



TE Part #140814-2  
250 FASTON,TAB,TPBR



TE Part #140814-1  
250 FASTON,TAB,BR

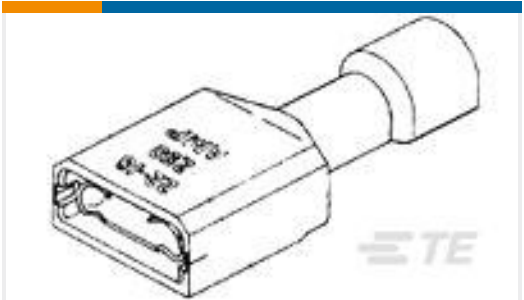

TE Part #2-520405-2  
ULTRA-FAST 250 ASY REC 22-18 TPBR



TE Part #1-1879352-5  
RR02 5% 1R2 AMMO



TE Part #CB5411-000  
SST-6-07/FR/97

Documents

Product Drawings

2.0MM,HDR,11POS,VERTICAL

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-440054-1\_F4.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-440054-1\_F4.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-440054-1\_F4.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

[HPI Connectors QRG](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English