# 776163-1 - ACTIVE

### AMP | AMPSEAL TE Internal #: 776163-1 PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > AMPSEAL PCB Horizontal Headers



Connector System: Wire-to-Board

Number of Positions: 35

Centerline (Pitch): 4 mm [.157 in ]

Sealable: Yes

PCB Mount Orientation: Right Angle

All AMPSEAL PCB Horizontal Headers (61)

#### Features

#### Product Type Features

PCB Connector Assembly Type

PCB Mount Header

Header Type	Fully Shrouded	
Connector System	Wire-to-Board	
Sealable	Yes	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Positions	35	
PCB Mount Orientation	Right Angle	
Number of Rows	3	
Body Features		
Primary Product Color	Black	
Connector & Keying Code	1	
Contact Features		
Contact Type	Pin	
Contact Mating Area Plating Material	Tin	
Contact Current Rating (Max)	8 A	

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



#### **Termination Features**

Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	4 mm[.157 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	

## Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Wave solder capable to 265°C	
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and based on the information they provided. This information is subject to chang		

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**



# Also in the Series | AMPSEAL




Automotive Connector Locks & Position Assurance(1)	Automotive Housings(31)	Automotive Terminals(8)	Connector Backshells(4)

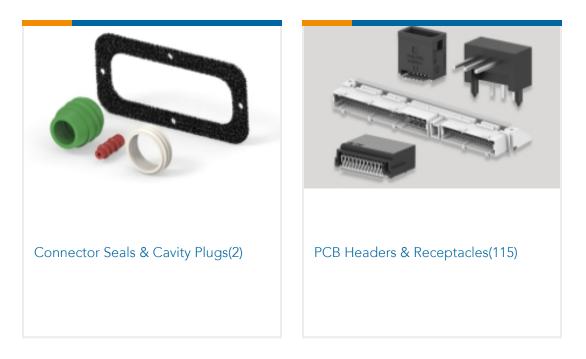

**Customers Also Bought** 

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



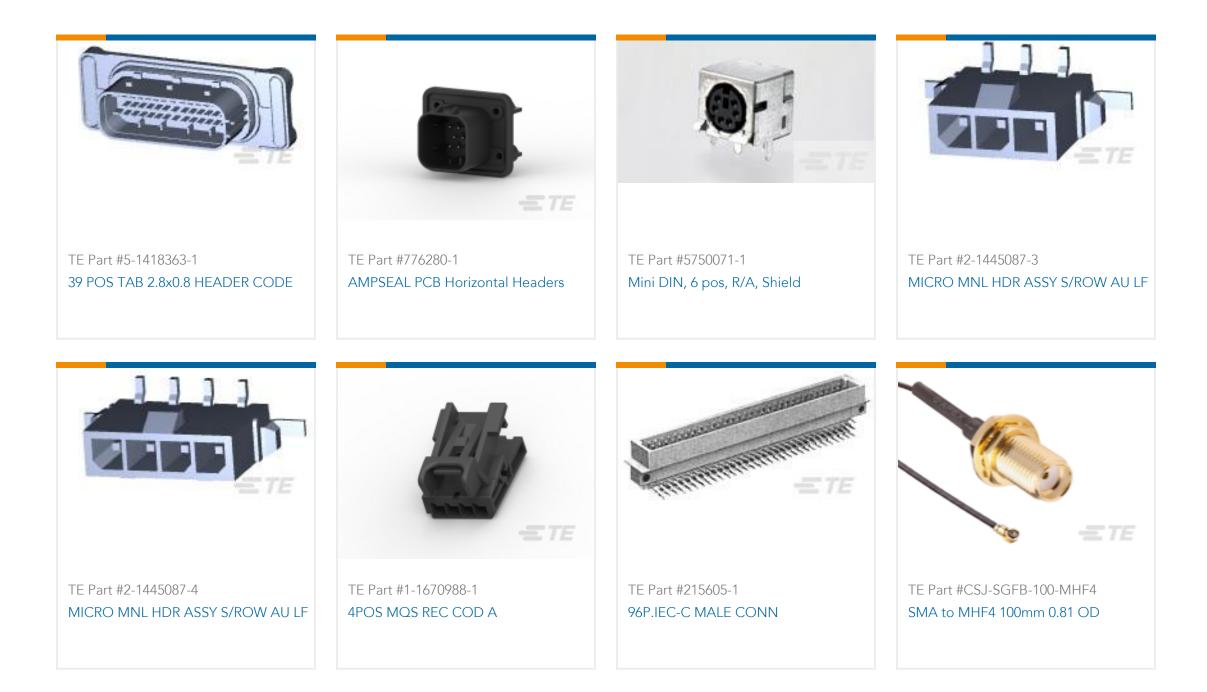

### Documents

Product Drawings 35POS,PIN DIA 1.3,HDR ASSY,90DEG,COD 1

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_776163-1\_S.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_776163-1\_S.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_776163-1\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

**Product Specifications** 

**Application Specification** 

English

PCB Mount Header, Right Angle, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



Agency Approvals UL Report

English