

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, contact surface: Tin, contact connection type: Socket, number of potentials: 7, number of rows: 1, number of positions: 7, number of connections: 7, product range: GMVSTBW 2,5/..-STF-EX, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: -90 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5 EX, locking: Screw locking mechanism, mounting: Screw flange, type of packaging: packed in cardboard

## Your advantages

- Well-known connection principle allows worldwide use
- Satisfies the more stringent safety requirements of “Ex eb” protection according to IEC 60079-7 for potentially explosive areas
- Screwable flange for superior mechanical stability
- Low temperature rise, thanks to maximum contact force

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1810052                        |
| Packing unit                         | 50 pc                          |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | AA03                           |
| Product key                          | AACAMK                         |
| Catalog page                         | Page 379 (C-1-2013)            |
| GTIN                                 | 4046356706087                  |
| Weight per piece (including packing) | 19 g                           |
| Weight per piece (excluding packing) | 18.068 g                       |
| Customs tariff number                | 85366990                       |
| Country of origin                    | DE                             |

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Technical data

### Product properties

|                       |                        |
|-----------------------|------------------------|
| Product type          | PCB connector          |
| Product family        | GMVSTBW 2,5/...-STF-EX |
| Product line          | COMBICON Connectors M  |
| Type                  | Standard               |
| Number of positions   | 7                      |
| Pitch                 | 7.62 mm                |
| Number of connections | 7                      |
| Number of rows        | 1                      |
| Number of potentials  | 7                      |
| Mounting flange       | Screw flange           |

### Electrical properties

|                                         |                          |
|-----------------------------------------|--------------------------|
| Nominal current $I_N$                   | 12 A                     |
| Nominal voltage $U_N$                   | 352 V                    |
| Rated current / conductor cross section | 12 A/2.5 mm <sup>2</sup> |

### Ex data

#### Ex approval

|                                 |                                          |
|---------------------------------|------------------------------------------|
| Identification                  | 0344 <sup>CE</sup> II 2GD / Ex eb IIC Gb |
| EU-type examination certificate | KEMA 10ATEX0196 U                        |
| IECEx certificate               | IECEx KEM 10.0093U                       |

### Connection data

#### Connection technology

|                         |                      |
|-------------------------|----------------------|
| Type                    | Standard             |
| Connector system        | COMBICON MSTB 2,5 EX |
| Nominal cross section   | 2.5 mm <sup>2</sup>  |
| Contact connection type | Socket               |

#### Interlock

|                   |                         |
|-------------------|-------------------------|
| Locking type      | Screw locking mechanism |
| Mounting flange   | Screw flange            |
| Tightening torque | 0.3 Nm                  |

#### Conductor connection

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Connection method                  | Screw connection with tension sleeve        |
| Conductor/PCB connection direction | -90 °                                       |
| Conductor cross section rigid      | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible   | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG        | 24 ... 12                                   |

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

|                                                                                           |                                              |
|-------------------------------------------------------------------------------------------|----------------------------------------------|
| Conductor cross section flexible, with ferrule without plastic sleeve                     | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                      | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, solid                                               | 0.2 mm <sup>2</sup> ... 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, flexible                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1 mm <sup>2</sup>   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>    |
| Cylindrical gauge a x b / diameter                                                        | 2.8 mm x 2.0 mm / 2.4 mm                     |
| Stripping length                                                                          | 7 mm                                         |
| Drive form screw head                                                                     | Slotted (L)                                  |
| Tightening torque                                                                         | 0.5 Nm ... 0.6 Nm                            |

## Specifications for ferrules without insulating collar

|                           |                    |
|---------------------------|--------------------|
| recommended crimping tool | 1212034 CRIMPFOX 6 |
|---------------------------|--------------------|

## Specifications for ferrules with insulating collar

|                           |                    |
|---------------------------|--------------------|
| recommended crimping tool | 1212034 CRIMPFOX 6 |
|---------------------------|--------------------|

## Material specifications

### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)                                                                |
| Metal surface contact area (top layer)   | Tin (4 - 8 µm Sn)                                                                |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Color (Housing)                                                   | green (6021) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |


## Dimensions

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

|                                                                                    |          |
|------------------------------------------------------------------------------------|----------|
| Dimensional drawing                                                                |          |
|  |          |
| Pitch                                                                              | 7.62 mm  |
| Width [w]                                                                          | 51.3 mm  |
| Height [h]                                                                         | 26 mm    |
| Length [l]                                                                         | 12.52 mm |

## Mounting

|                   |        |
|-------------------|--------|
| Flange            |        |
| Tightening torque | 0.3 Nm |

## Notes

|                    |                                                                                                                                                                                          |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Environmental and real-life conditions

|                                         |                   |
|-----------------------------------------|-------------------|
| Ambient conditions                      |                   |
| Ambient temperature (operation)         | -60 °C ... 110 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C  |
| Relative humidity (storage/transport)   | 30 % ... 70 %     |
| Ambient temperature (assembly)          | -5 °C ... 100 °C  |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector




1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Drawings

Dimensional drawing

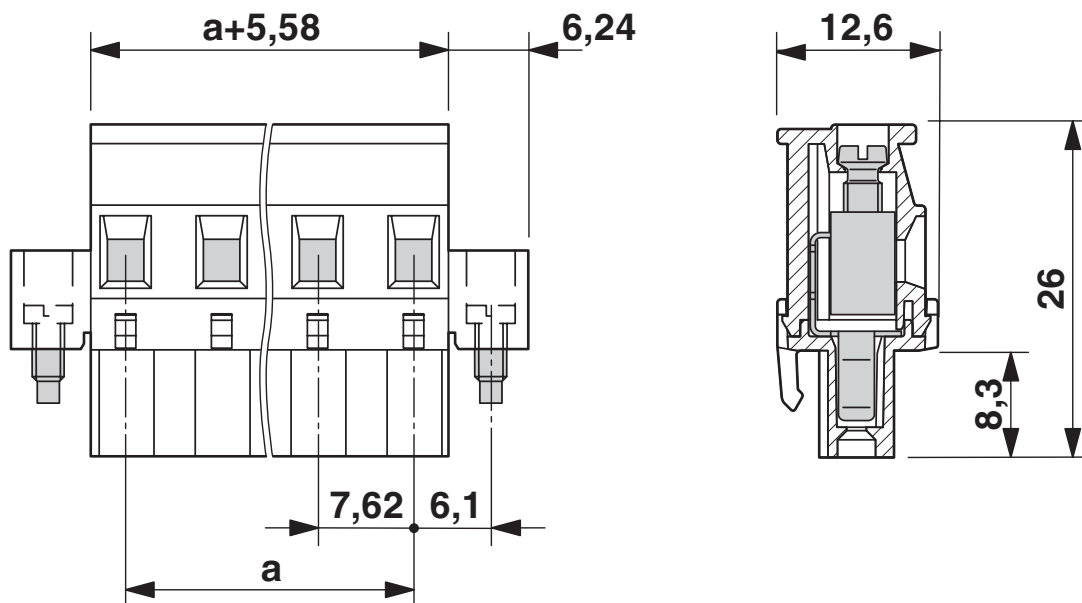

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1810052>



### ATEX

Approval ID: KEMA 10ATEX0196 U

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 352 V                 | 12 A                  | -                 | 0.2 - 2.5                   |



### IECEX

Approval ID: IECEX KEM 10.0093U

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 352 V                 | 12 A                  | -                 | 0.2 - 2.5                   |



### EAC Ex

Approval ID: B.00065/19



### CCC

Approval ID: 2021122313114375

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460202 |
| ECLASS-12.0 | 27460202 |
| ECLASS-13.0 | 27460202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002638 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |



# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## Accessories

### CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/us/products/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



---

### MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>

Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray



## GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector

1810052

<https://www.phoenixcontact.com/us/products/1810052>



## RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

---

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## SK 5,08/3,8:FORTL.ZAHLEN - Marker card

0804293

<https://www.phoenixcontact.com/us/products/0804293>



Marker card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 5.08 mm, lettering field size: 5.08 x 3.8 mm

---

## SK 5,08/3,8:UNBEDRUCKT - Marker card

0805412

<https://www.phoenixcontact.com/us/products/0805412>



Marker card, Sheet, white, unlabeled, can be labeled with: Marker pen: without print, mounting type: adhesive, for terminal block width: 5.08 mm, lettering field size: 5.08 x 3.8 mm, Number of individual labels: 120

## GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector

1810052

<https://www.phoenixcontact.com/us/products/1810052>



## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## GMSTB 2,5/ 7-GF-7,62 EX - PCB header

1795938

<https://www.phoenixcontact.com/us/products/1795938>



PCB headers, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, contact surface: Tin, contact connection type: Pin, number of potentials: 7, number of rows: 1, number of positions: 7, number of connections: 7, product range: GMSTB 2,5/-GF-EX, pitch: 7.62 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.23 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5 EX, Pin connector pattern alignment: Standard, locking: Screw locking mechanism, mounting: Threaded flange, type of packaging: packed in cardboard

# GMVSTBW 2,5/ 7-STF-7,62 EX - PCB connector



1810052

<https://www.phoenixcontact.com/us/products/1810052>

## GMSTBV 2,5/ 7-GF-7,62 EX - PCB header

1796717

<https://www.phoenixcontact.com/us/products/1796717>



PCB headers, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, contact surface: Tin, contact connection type: Pin, number of potentials: 7, number of rows: 1, number of positions: 7, number of connections: 7, product range: GMSTBV 2,5/...-GF-EX, pitch: 7.62 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.9 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, Pin connector pattern alignment: Standard, locking: Screw locking mechanism, mounting: Threaded flange, type of packaging: packed in cardboard

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)