

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Product description

Connector element right, left housing with engagement pin, right closed with cover

## Your advantages

- Plug with bridging option, for use with basic terminal blocks
- The plug with spring-cage connection is assembled directly on site by snapping together single-position plug elements
- The ST-COMBI plugs for self-assembly provide solutions that users can implement themselves

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3043161             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BE02                |
| Product key                          | BE2144              |
| Catalog page                         | Page 321 (C-1-2019) |
| GTIN                                 | 4017918895020       |
| Weight per piece (including packing) | 3.69 g              |
| Weight per piece (excluding packing) | 3.653 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | PL                  |

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## Technical data

### Product properties

|                     |               |
|---------------------|---------------|
| Product type        | Terminal plug |
| Number of positions | 1             |
| Pitch               | 5.2 mm        |
| Potentials          | 1             |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                     |      |
|---------------------|------|
| Rated surge voltage | 6 kV |
|---------------------|------|

### Connection data

|                                                                                           |                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                                   |
| Stripping length                                                                          | 8 mm ... 10 mm                                        |
| Internal cylindrical gage                                                                 | A3                                                    |
| Connection in acc. with standard                                                          | IEC 61984                                             |
| Conductor cross section rigid                                                             | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>            |
| Cross section AWG                                                                         | 28 ... 12 (converted acc. to IEC)                     |
| Conductor cross section flexible                                                          | 0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Conductor cross section, flexible [AWG]                                                   | 28 ... 14 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>          |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup>                                   |
| Nominal current                                                                           | 24 A                                                  |
| Maximum load current                                                                      | 24 A (with 4 mm <sup>2</sup> conductor cross section) |
| Nominal voltage                                                                           | 500 V                                                 |
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                                   |

### Dimensions

|        |        |
|--------|--------|
| Width  | 5.2 mm |
| Height | 20 mm  |
| Depth  | 39 mm  |
| Length | 20 mm  |
| Pitch  | 5.2 mm |

### Material specifications

|                                        |      |
|----------------------------------------|------|
| Color                                  | gray |
| Flammability rating according to UL 94 | V0   |
| Insulating material group              | I    |

# SPB 2,5/ 1-R - Plug



3043161

<https://www.phoenixcontact.com/us/products/3043161>

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Environmental and real-life conditions


### Ambient conditions

|                                          |                                                                          |
|------------------------------------------|--------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C (max. operating temperature see derating curve)                   |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                          |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                          |
| Permissible humidity (operation)         | 20 % ... 90 %                                                            |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                            |


## Standards and regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

## Drawings

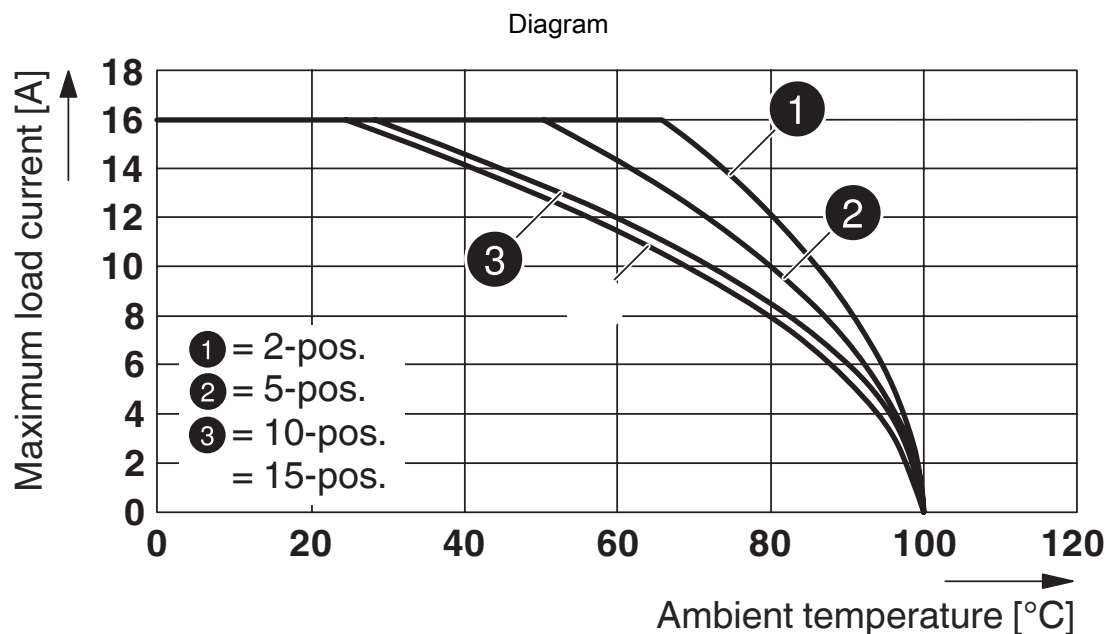

Derating curve for ST 2,5-TWIN-MT/1P, ST 2,5-TWIN-TG/1P and for all plug versions SP...

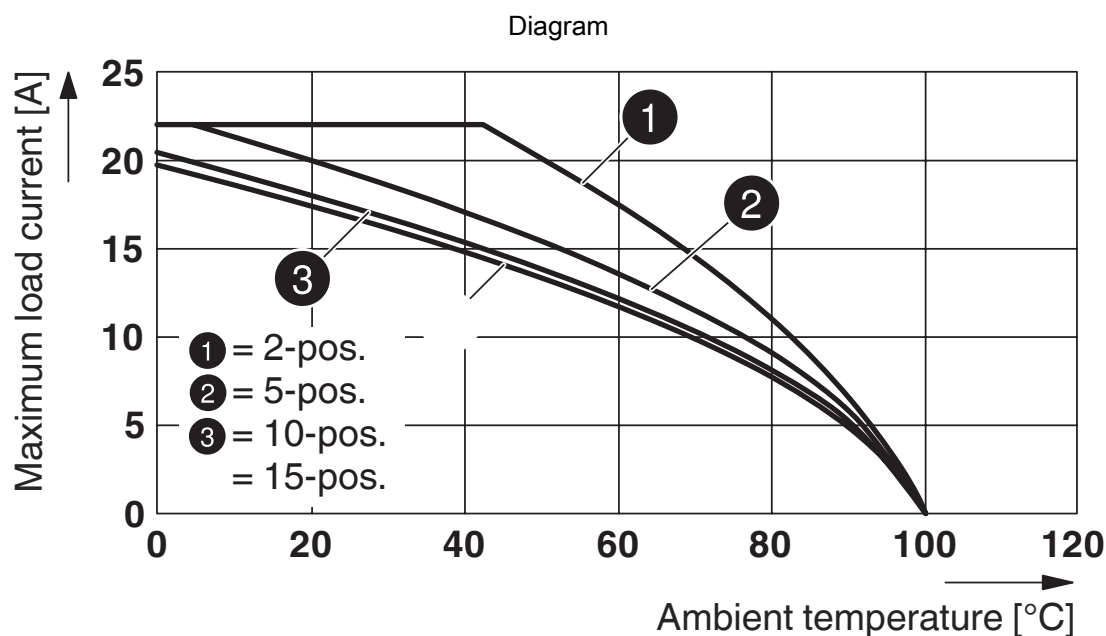


Derating curve for STTB 2,5/ 2P, STTB 2,5/ 2P-PV and for all plug versions SP...

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>

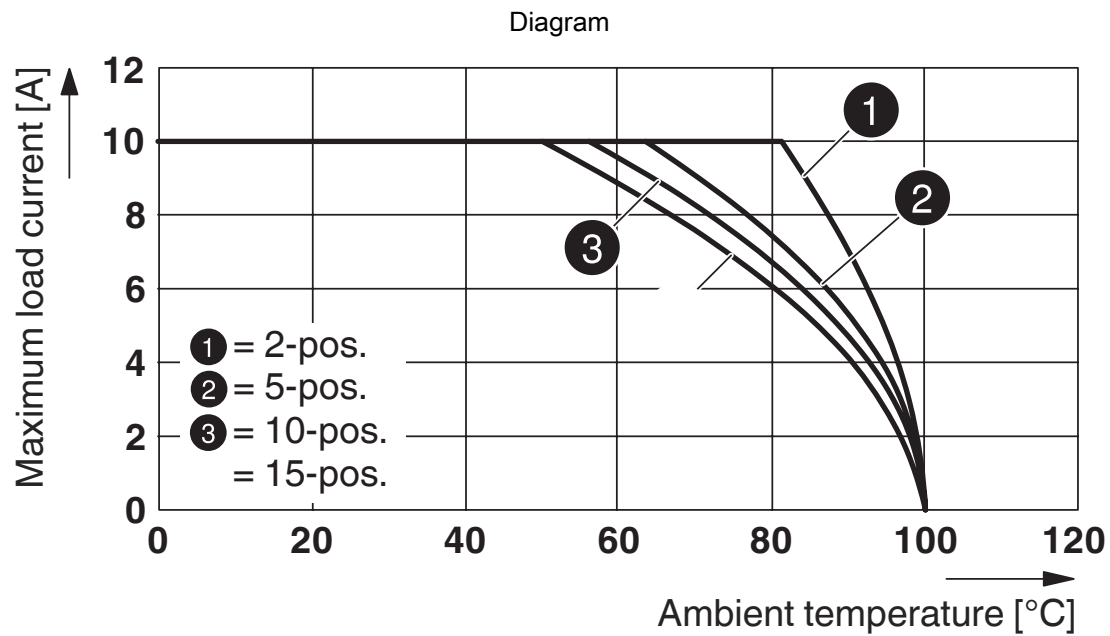

Derating curve for ST 2,5-4L/1P, ST 2,5-4L/2P and for all plug versions SP...

Circuit diagram




# SPB 2,5/ 1-R - Plug


3043161

<https://www.phoenixcontact.com/us/products/3043161>




Schematic diagram

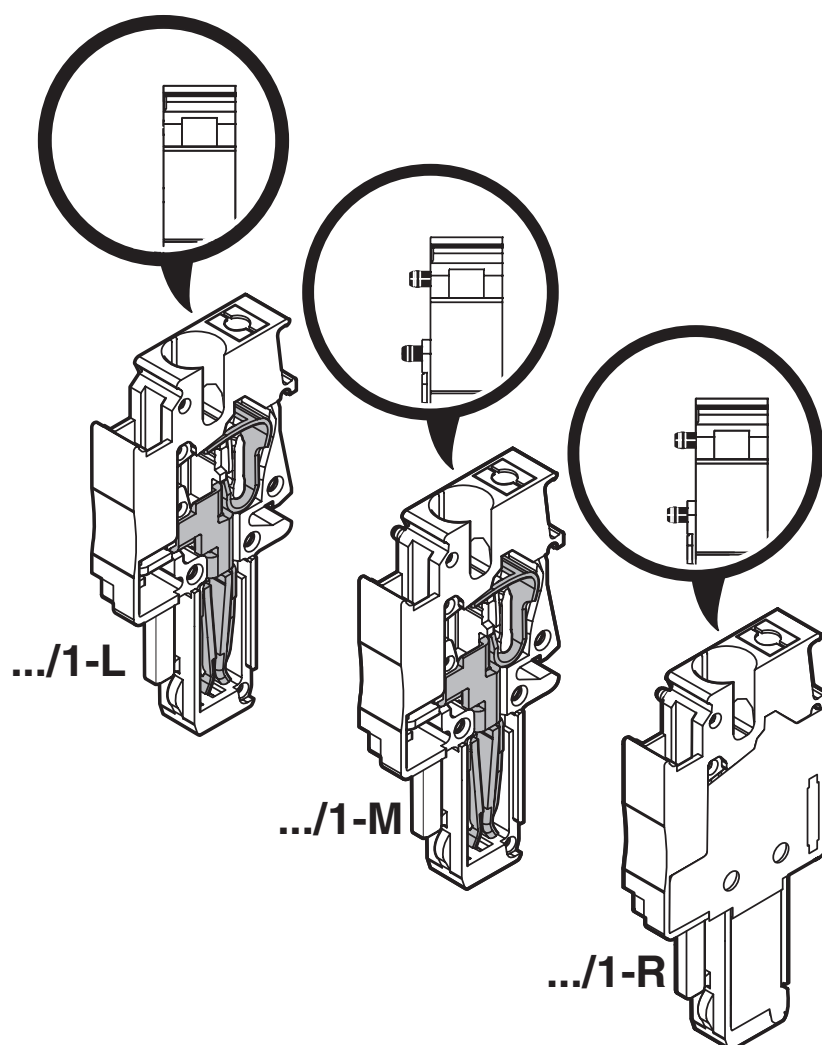

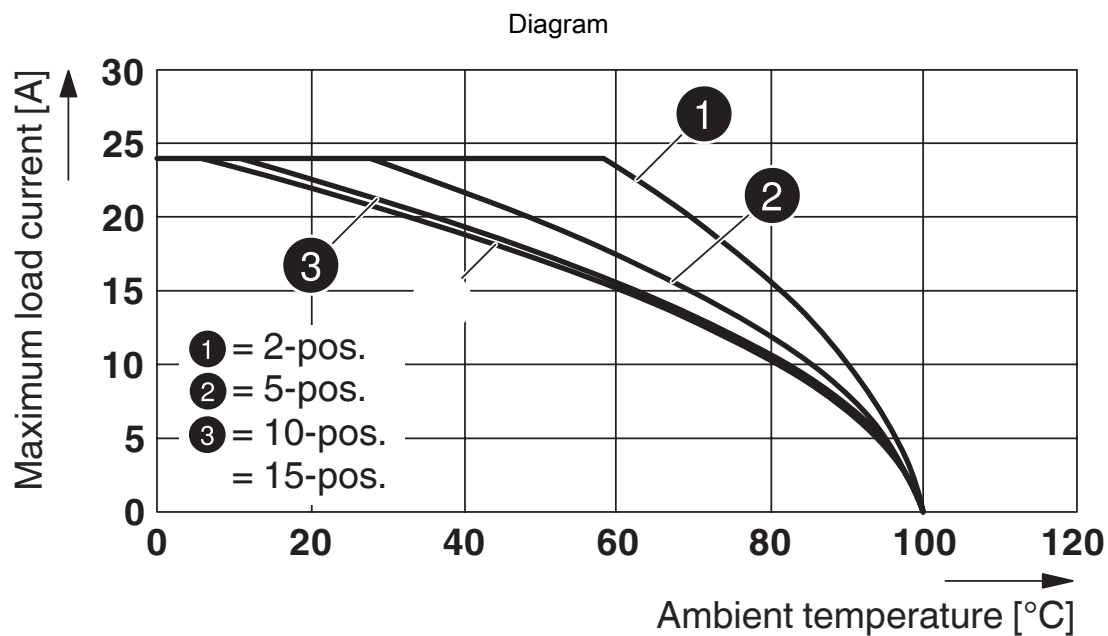

Derating curve for ST 2,5-QUATTRO/2P, ST 2,5-QUATTRO/4P and for all plug versions SP...

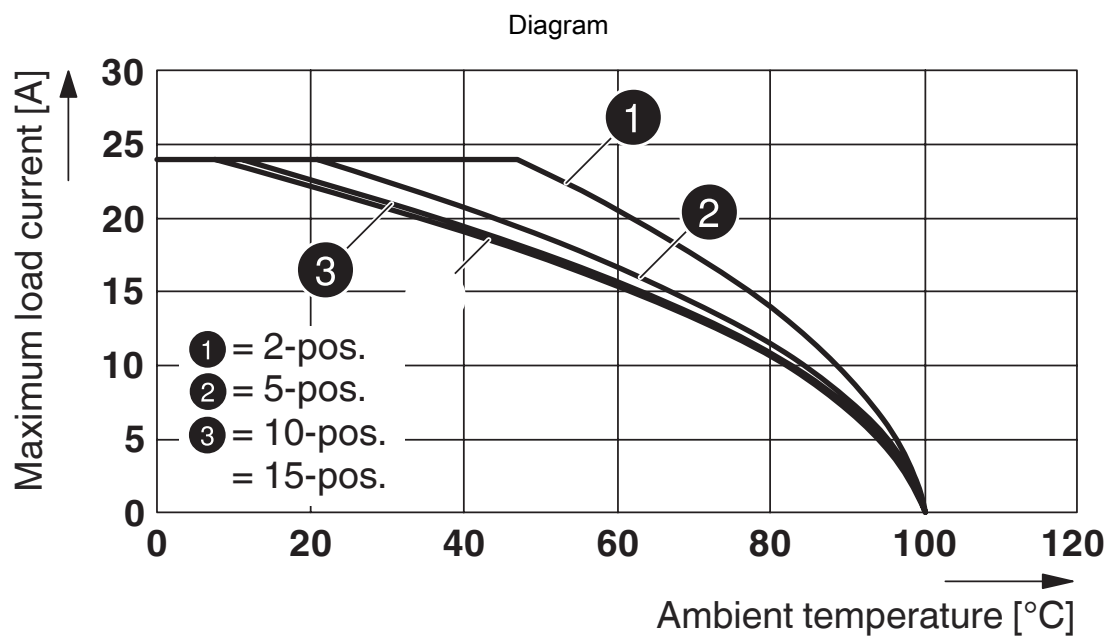

Derating curve for ST 2,5/ 1P, ST 2,5/ 2P, ST 2,5-TWIN/ 1P and for all plug versions SP...

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3043161>

| CSA<br>Approval ID: 13631 |                       |                       |                   |                             |
|---------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                           | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B               | 300 V                 | 20 A                  | 28 - 12           | -                           |
| Use group C               | 300 V                 | 20 A                  | 28 - 12           | -                           |
| Use group D               | 600 V                 | 5 A                   | 28 - 12           | -                           |

| CB<br>IECEE CB Scheme<br>Approval ID: DE1-62736/B1/B2 |  |  |  |  |
|-------------------------------------------------------|--|--|--|--|
|-------------------------------------------------------|--|--|--|--|

| EAC<br>Approval ID: RU C-DE.BL08.B.00511 |  |  |  |  |
|------------------------------------------|--|--|--|--|
|------------------------------------------|--|--|--|--|

| LR<br>Approval ID: LR2042068TA |  |  |  |  |
|--------------------------------|--|--|--|--|
|--------------------------------|--|--|--|--|

| RS<br>Approval ID: 22.44.01.00083.250 |  |  |  |  |
|---------------------------------------|--|--|--|--|
|---------------------------------------|--|--|--|--|

| BV<br>Approval ID: 27721/B0 BV |  |  |  |  |
|--------------------------------|--|--|--|--|
|--------------------------------|--|--|--|--|

| VDE Zeichengenehmigung<br>Approval ID: 40019518 |                       |                       |                   |                             |
|-------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                 | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Only flexible conductors                        | 500 V                 | -                     | -                 | 0.2 - 2.5                   |
| Only rigid conductors                           | 500 V                 | -                     | -                 | 0.2 - 4                     |

| cULus Recognized<br>Approval ID: E60425 |  |  |  |  |
|-----------------------------------------|--|--|--|--|
|-----------------------------------------|--|--|--|--|

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



**cULus Recognized**  
Approval ID: E60425

**DNV**

Approval ID: TAE00001CS

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141151 |
| ECLASS-12.0 | 27141151 |
| ECLASS-13.0 | 27250306 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002021 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/us/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

**i** Max. current carrying capacity: 24 A

---

### FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/us/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

**i** Max. current carrying capacity: 24 A

---

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/us/products/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

## FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/us/products/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/us/products/3030213>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

## FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/us/products/3030226>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/us/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 24 A

---

### FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/us/products/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/us/products/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

---

## FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/us/products/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/us/products/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 24 A

---

## FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/us/products/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/us/products/3036929>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 24 A

---

### FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/us/products/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### FBS 2-5 GY - Plug-in bridge

3038969

<https://www.phoenixcontact.com/us/products/3038969>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 24 A

---

### FBS 3-5 GY - Plug-in bridge

3038972

<https://www.phoenixcontact.com/us/products/3038972>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 24 A

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 4-5 GY - Plug-in bridge

3038985

<https://www.phoenixcontact.com/us/products/3038985>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 24 A

---

## FBS 5-5 GY - Plug-in bridge

3038998

<https://www.phoenixcontact.com/us/products/3038998>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 24 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 10-5 GY - Plug-in bridge

3039007

<https://www.phoenixcontact.com/us/products/3039007>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 24 A

---

## FBS 20-5 GY - Plug-in bridge

3038671

<https://www.phoenixcontact.com/us/products/3038671>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: gray



 Max. current carrying capacity: 24 A

---

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBS 50-5 GY - Plug-in bridge

3032127

<https://www.phoenixcontact.com/us/products/3032127>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: gray

 Max. current carrying capacity: 24 A

---

## FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/us/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/us/products/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/us/products/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/us/products/3001593>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 17.5 A

---

## FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/us/products/3033710>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 17.5 A

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### PDZ/2 - Strain relief

3040562

<https://www.phoenixcontact.com/us/products/3040562>



Strain relief, width: 9.6 mm, height: 28.9 mm, number of positions: 2, color: black

---

### PDZ/4 - Strain relief

3040575

<https://www.phoenixcontact.com/us/products/3040575>



Strain relief, width: 19.8 mm, height: 28.9 mm, number of positions: 4, color: black

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### PR - Latching

3040559

<https://www.phoenixcontact.com/us/products/3040559>



Latching, width: 4.4 mm, height: 29.8 mm, number of positions: 1, color: orange

---

### PR/2 - Latching

3040630

<https://www.phoenixcontact.com/us/products/3040630>



Latching, width: 10 mm, height: 29.8 mm, number of positions: 2, color: orange

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### PRT/2 - Latching

3040631

<https://www.phoenixcontact.com/us/products/3040631>



Latching, can only be released using a screwdriver, width: 9 mm, height: 23.2 mm, number of positions: 2, color: orange

---

### PRZ - Latching

3040614

<https://www.phoenixcontact.com/us/products/3040614>



Latching, number of positions: 2, length: 64 mm, color: orange

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## SPB 2,5/ 1-L - Plug

3043103

<https://www.phoenixcontact.com/us/products/3043103>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## SPB 2,5/ 1-L BK - Plug

3215025

<https://www.phoenixcontact.com/us/products/3215025>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: black

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## SPB 2,5/ 1-L BU - Plug

3043116

<https://www.phoenixcontact.com/us/products/3043116>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## SPB 2,5/ 1-L GNYE - Plug

3043129

<https://www.phoenixcontact.com/us/products/3043129>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## SPB 2,5/ 1-M - Plug

3043132

<https://www.phoenixcontact.com/us/products/3043132>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## SPB 2,5/ 1-M BK - Plug

3215012

<https://www.phoenixcontact.com/us/products/3215012>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: black

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## SPB 2,5/ 1-M BU - Plug

3043145

<https://www.phoenixcontact.com/us/products/3043145>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## SPB 2,5/ 1-M GNYE - Plug

3043158

<https://www.phoenixcontact.com/us/products/3043158>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/us/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

---

### ZBF 5 CUS - Zack Marker strip, flat

0825025

<https://www.phoenixcontact.com/us/products/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

<https://www.phoenixcontact.com/us/products/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/us/products/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

<https://www.phoenixcontact.com/us/products/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/us/products/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### UC-TMF 5 - Marker for terminal blocks

0818153

<https://www.phoenixcontact.com/us/products/0818153>




Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

---

### UC-TMF 5 CUS - Marker for terminal blocks

0824638

<https://www.phoenixcontact.com/us/products/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



### UCT-TMF 5 - Marker for terminal blocks

0828744

<https://www.phoenixcontact.com/us/products/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

---

### UCT-TMF 5 CUS - Marker for terminal blocks

0829658

<https://www.phoenixcontact.com/us/products/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## ISH 2,5/0,2 - Insulating sleeve

3002843

<https://www.phoenixcontact.com/us/products/3002843>

Insulating sleeve, color: white



---

## ISH 2,5/0,5 - Insulating sleeve

3002856

<https://www.phoenixcontact.com/us/products/3002856>

Insulating sleeve, color: gray



## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## ISH 2,5/1,0 - Insulating sleeve

3002869

<https://www.phoenixcontact.com/us/products/3002869>



Insulating sleeve, color: black

---

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

## SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

## ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/us/products/1207608>



Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages

# SPB 2,5/ 1-R - Plug

3043161

<https://www.phoenixcontact.com/us/products/3043161>



## DFS-SPB 2,5 - Flange cover

3061444

<https://www.phoenixcontact.com/us/products/3061444>

Flange cover, width: 4.5 mm, height: 24.7 mm, color: gray



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)