

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

## Commercial data

Item number	3060762
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1144
Catalog page	Page 357 (C-1-2019)
GTIN	4046356607964
Weight per piece (including packing)	6.623 g
Weight per piece (excluding packing)	6.623 g
Customs tariff number	85366990
Country of origin	CN

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Technical data

### Product properties

Product type	Terminal plug
Number of positions	1
Pitch	8.2 mm
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
---------------------	------

### Connection data

Nominal cross section	6 mm <sup>2</sup>
-----------------------	-------------------

### Level 1 above 1 below 1

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
2 conductors with same cross section, solid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Nominal current	41 A
Maximum load current	41 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	1000 V
Nominal cross section	6 mm <sup>2</sup>

### Dimensions

Width	8.2 mm
Height	21 mm
Depth	42.7 mm

# UP 6/ 1-M - Plug



3060762

<https://www.phoenixcontact.com/us/products/3060762>

Length	21 mm
Pitch	8.2 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Drawings

### Circuit diagram




# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>

Schematic diagram

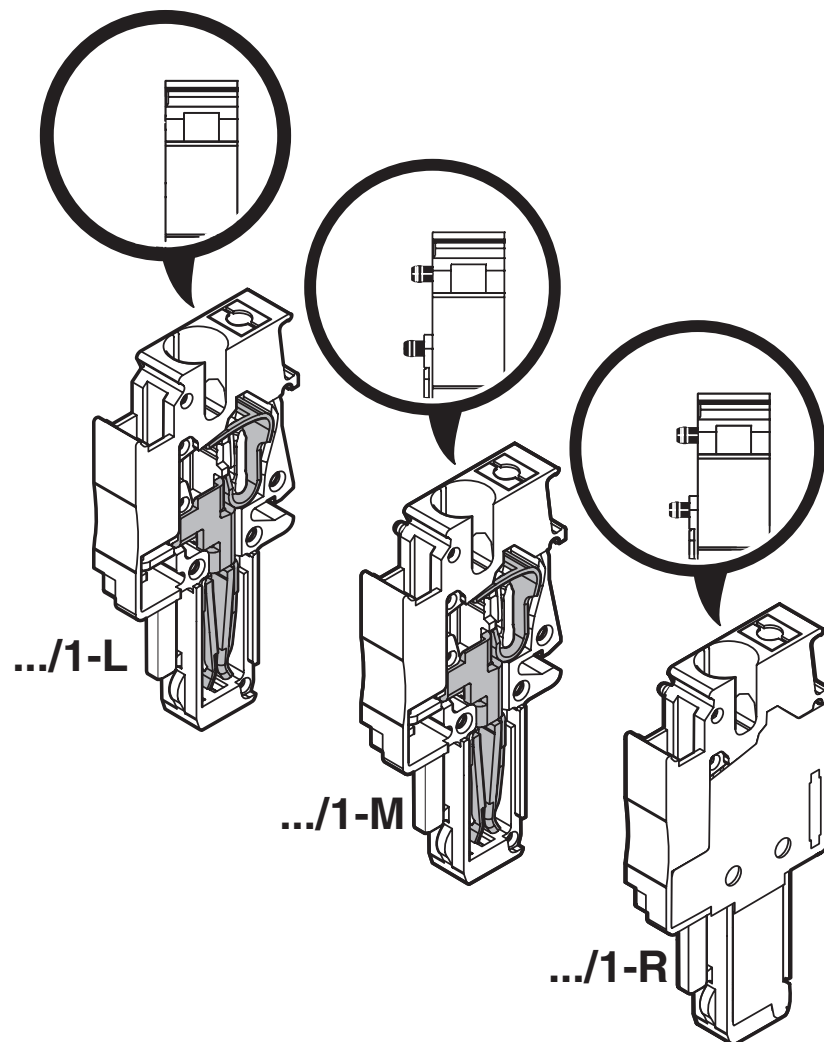

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3060762>

CSA Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	600 V	50 A	24 - 8	-
Use group C	600 V	50 A	24 - 8	-

CB IECEE CB Scheme Approval ID: DE1-62748				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	1000 V	41 A	-	0.2 - 6

EAC Approval ID: RU C-DE.BL08.B.00511				
--	--	--	--	--

cULus cULus Recognized Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	600 V	40 A	24 - 8	-
Use group C	600 V	40 A	24 - 8	-

VDE VDE Gutachten mit Fertigungsüberwachung Approval ID: 40034876				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	1000 V	41 A	-	0.2 - 6

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Classifications

### ECLASS

ECLASS-11.0	27141151
ECLASS-12.0	27141151
ECLASS-13.0	27250306

### ETIM

ETIM 9.0	EC002021
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



# UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## Accessories

### PRZ - Latching

3040614

<https://www.phoenixcontact.com/us/products/3040614>



Latching, number of positions: 2, length: 64 mm, color: orange

---

### PR - Latching

3040559

<https://www.phoenixcontact.com/us/products/3040559>



Latching, width: 4.4 mm, height: 29.8 mm, number of positions: 1, color: orange

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



### PR/2 - Latching

3040630

<https://www.phoenixcontact.com/us/products/3040630>



Latching, width: 10 mm, height: 29.8 mm, number of positions: 2, color: orange

---

### PRT/2 - Latching

3040631

<https://www.phoenixcontact.com/us/products/3040631>



Latching, can only be released using a screwdriver, width: 9 mm, height: 23.2 mm, number of positions: 2, color: orange

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## PZ/2 - Strain relief

3040627

<https://www.phoenixcontact.com/us/products/3040627>



Strain relief, width: 9.3 mm, height: 48.7 mm, number of positions: 2, color: black

---

## UP 6/ 1-L - Plug

3060733

<https://www.phoenixcontact.com/us/products/3060733>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## UP 6/ 1-L BU - Plug

3060746

<https://www.phoenixcontact.com/us/products/3060746>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

---

## UP 6/ 1-L GNYE - Plug

3060759

<https://www.phoenixcontact.com/us/products/3060759>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



### UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

### UP 6/ 1-M BU - Plug

3060775

<https://www.phoenixcontact.com/us/products/3060775>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## UP 6/ 1-M GNYE - Plug

3060788

<https://www.phoenixcontact.com/us/products/3060788>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

---

## UP 6/ 1-R - Plug

3060791

<https://www.phoenixcontact.com/us/products/3060791>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## UP 6/ 1-R BU - Plug

3060801

<https://www.phoenixcontact.com/us/products/3060801>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

---

## UP 6/ 1-R GNYE - Plug

3060814

<https://www.phoenixcontact.com/us/products/3060814>



Plug, nom. voltage: 1000 V, nominal current: 41 A, number of positions: 1, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## PH 6/2 - Cable housing

3000680

<https://www.phoenixcontact.com/us/products/3000680>



Cable housing, pitch: 16.4 mm, depth: 52.3 mm, width: 16.4 mm, height: 21 mm, number of positions: 2, color: gray

---

## PH 6/3 - Cable housing

3000681

<https://www.phoenixcontact.com/us/products/3000681>



Cable housing, pitch: 24.6 mm, width: 24.6 mm, height: 52.3 mm, number of positions: 3, color: gray



## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## PH 6/4 - Cable housing

3000682

<https://www.phoenixcontact.com/us/products/3000682>



Cable housing, pitch: 32.8 mm, depth: 52.3 mm, width: 32.8 mm, height: 21 mm, number of positions: 4, color: gray

---

## PH 6/5 - Cable housing

3000683

<https://www.phoenixcontact.com/us/products/3000683>



Cable housing, pitch: 41 mm, depth: 52.3 mm, width: 41 mm, height: 21 mm, number of positions: 5, color: gray

## UP 6/ 1-M - Plug

3060762


<https://www.phoenixcontact.com/us/products/3060762>



### PH 6/6 - Cable housing

3000684

<https://www.phoenixcontact.com/us/products/3000684>



Cable housing, pitch: 49.2 mm, depth: 52.3 mm, width: 49.2 mm, height: 21 mm, number of positions: 6, color: gray

---

### PH 6/7 - Cable housing

3000685

<https://www.phoenixcontact.com/us/products/3000685>



Cable housing, pitch: 57.4 mm, width: 57.4 mm, height: 52.3 mm, number of positions: 7, color: gray

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

<https://www.phoenixcontact.com/us/products/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

---

## ZBF 8 CUS - Zack Marker strip, flat

0825030

<https://www.phoenixcontact.com/us/products/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## ZBF 8,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808804

<https://www.phoenixcontact.com/us/products/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

---

## UC-TMF 8 - Marker for terminal blocks

0818137

<https://www.phoenixcontact.com/us/products/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## UC-TMF 8 CUS - Marker for terminal blocks

0824654

<https://www.phoenixcontact.com/us/products/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

---

## UCT-TMF 8 - Marker for terminal blocks

0828748

<https://www.phoenixcontact.com/us/products/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## UCT-TMF 8 CUS - Marker for terminal blocks

0829672

<https://www.phoenixcontact.com/us/products/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

---

## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



### MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

### MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



### MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

### MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow





## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

## SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip



## UP 6/ 1-M - Plug

3060762

<https://www.phoenixcontact.com/us/products/3060762>



## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)