


Buchanan

TE Internal #: 2342071-4 PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .138 in [3.5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board

View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

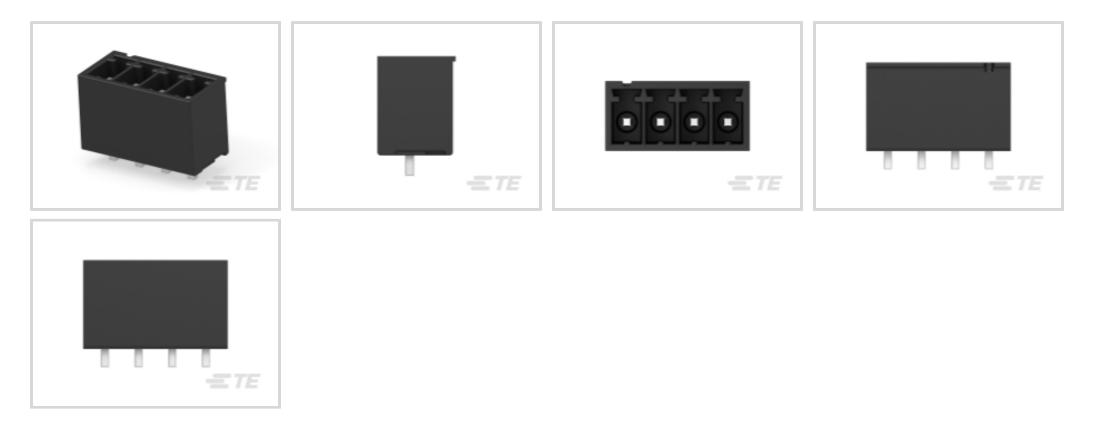

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 3.5 mm [.138 in]

Number of Rows: 1

Features

connectivity

Product Type Features

Header Type	Fully Shrouded
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stacking Configuration	Side Stackable
Number of Positions	4
Number of Rows	1
Electrical Characteristics	
Operating Voltage	300 VAC
Body Features	
Primary Product Color	Black
Product Orientation	Vertical

2342071-4

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .138 in [3.5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



Contact Features

Termination Post & Tail Length1.9 mm[.075 in]Termination Method to Printed Circuit BoardThrough Hole - SolderMechanical AttachmentBoard MountConnector Mounting TypeBoard MountHousing FeaturesHigh Temperature PolyamideCenterline (Pitch)3.5 mm[.138 in]Usage Conditions-40 – 105 °C[-40 – 221 °F]Operating Temperature Range-40 – 105 °C[-40 – 221 °F]Circuit ApplicationPower & Signal		
Contact Current Rating (Max)11 ATermination FeaturesTermination Post & Tail Length1.9 mm[.075 in]Termination Method to Printed Circuit BoardThrough Hole - SolderMechanical AttachmentSolderConnector Mounting TypeBoard MountHousing FeaturesHigh Temperature PolyamideCenterline (Pitch)3.5 mm[.138 in]Usage Conditions-40 – 105 °C[-40 – 221 °F]Operating Temperature Range-40 – 105 °C[-40 – 221 °F]Operation/ApplicationFower & Signal	Contact Mating Area Plating Material	Tin
Termination Features Termination Post & Tail Length 1.9 mm[.075 in] Termination Method to Printed Circuit Board Through Hole - Solder Mechanical Attachment Mechanical Attachment Connector Mounting Type Board Mount Housing Features High Temperature Polyamide Centerline (Pitch) 3.5 mm[.138 in] Usage Conditions -40 – 105 °C[-40 – 221 °F] Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Power & Signal	Contact Base Material	Copper Magnesium
Termination Post & Tail Length1.9 mm[.075 in]Termination Method to Printed Circuit BoardThrough Hole - SolderMechanical AttachmentBoard MountConnector Mounting TypeBoard MountHousing FeaturesHigh Temperature PolyamideCenterline (Pitch)3.5 mm[.138 in]Usage Conditions-40 – 105 °C[-40 – 221 °F]Operating Temperature Range-40 – 105 °C[-40 – 221 °F]Circuit ApplicationPower & Signal	Contact Current Rating (Max)	11 A
Termination Method to Printed Circuit Board Through Hole - Solder Mechanical Attachment Board Mount Connector Mounting Type Board Mount Housing Features High Temperature Polyamide Centerline (Pitch) 3.5 mm[.138 in] Usage Conditions -40 – 105 °C[-40 – 221 °F] Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Circuit Application Power & Signal	Termination Features	
Mechanical Attachment Board Mount Connector Mounting Type Board Mount Housing Features High Temperature Polyamide Kechanical Material Migh Temperature Polyamide Centerline (Pitch) 3.5 mm[.138 in] Usage Conditions -40 – 105 °C[-40 – 221 °F] Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Power & Signal	Termination Post & Tail Length	1.9 mm[.075 in]
Connector Mounting TypeBoard MountHousing FeaturesHigh Temperature PolyamideHousing MaterialHigh Temperature PolyamideCenterline (Pitch)3.5 mm[.138 in]Usage Conditions-40 – 105 °C[-40 – 221 °F]Operating Temperature Range-40 – 105 °C[-40 – 221 °F]Operation/ApplicationPower & Signal	Termination Method to Printed Circuit Board	Through Hole - Solder
Housing Features Housing Material High Temperature Polyamide Centerline (Pitch) 3.5 mm[.138 in] Usage Conditions -40 – 105 °C[-40 – 221 °F] Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application -40 – 105 °C[-40 – 221 °F]	Mechanical Attachment	
Housing MaterialHigh Temperature PolyamideCenterline (Pitch) $3.5 \text{ mm}[.138 \text{ in}]$ Usage Conditions $-40 - 105 ^{\circ}\text{C}[-40 - 221 ^{\circ}\text{F}]$ Operating Temperature Range $-40 - 105 ^{\circ}\text{C}[-40 - 221 ^{\circ}\text{F}]$ Operation/ApplicationFilleCircuit ApplicationPower & Signal	Connector Mounting Type	Board Mount
Centerline (Pitch) 3.5 mm[.138 in] Usage Conditions -40 – 105 °C[-40 – 221 °F] Operation/Application -40 – 105 °C[-40 – 221 °F] Circuit Application Power & Signal	Housing Features	
Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application	Housing Material	High Temperature Polyamide
Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application -40 – 105 °C[-40 – 221 °F] Circuit Application Power & Signal	Centerline (Pitch)	3.5 mm[.138 in]
Operation/Application Circuit Application Power & Signal	Usage Conditions	
Circuit Application Power & Signal	Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
	Operation/Application	
Packaging Features	Circuit Application	Power & Signal
	Packaging Features	



Packaging Method

Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

C For support call+1 800 522 6752

04/15/2024 02:57PM | Page 2

2342071-4

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .138 in [3.5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought









Documents

Product Drawings 4POS HDR ST, HT, 3.5MM PITCH, TL 1.9MM

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2342071-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2342071-4_A.3d_igs.zip

English

2342071-4

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .138 in [3.5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



Customer View Model

ENG_CVM_CVM_2342071-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

Product Specifications

Product Specification

English

Agency Approvals

UL

English