


## Data sheet | Item number: 2091-1402

THT male header; 1.0 mm Ø solder pin; straight; Pin spacing 3.5 mm; 2-pole;  
light gray


[www.wago.com/2091-1402](http://www.wago.com/2091-1402)

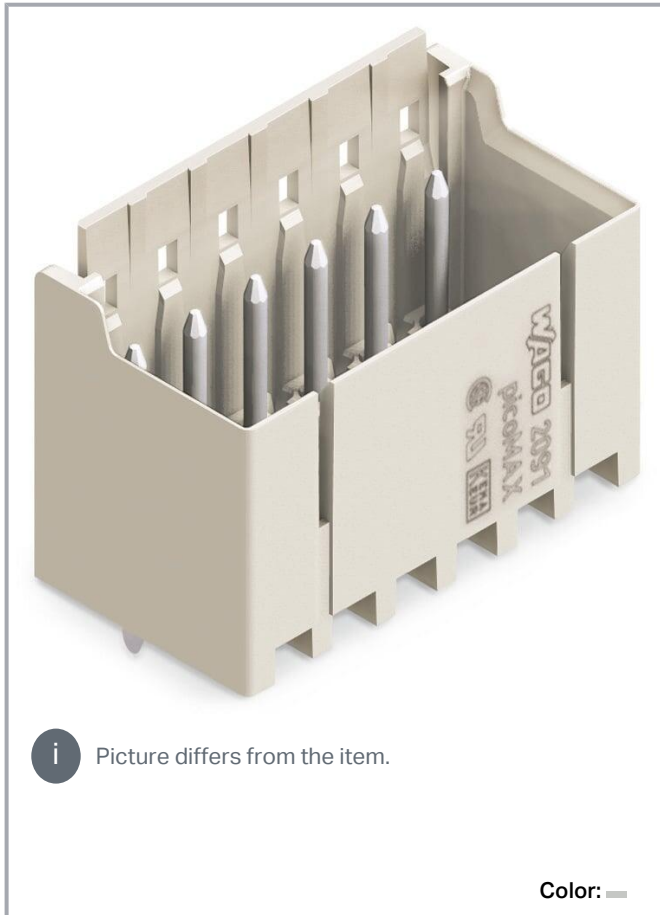

i Picture differs from the item.

Color: —


**Derating Curve**  
1-conductor female connector (2091-1122) with  
THT male header (2091-1402)  
Pin spacing: 3.5 mm / Conductor cross-section: 1.5 mm<sup>2</sup> "f-st"  
Based on: EN 60512-5-2 / Reduction factor: 0.8

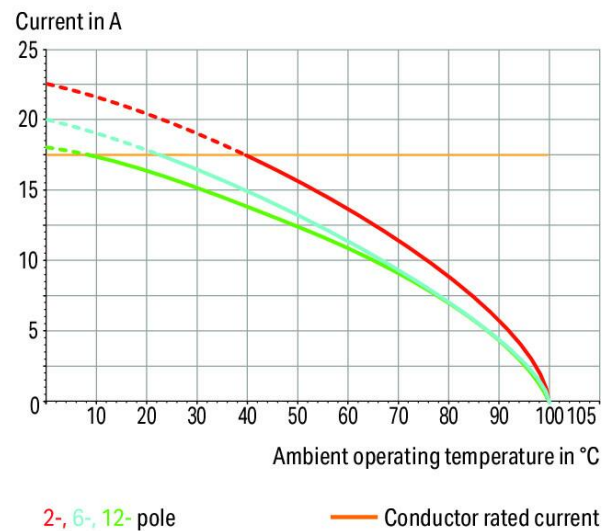

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

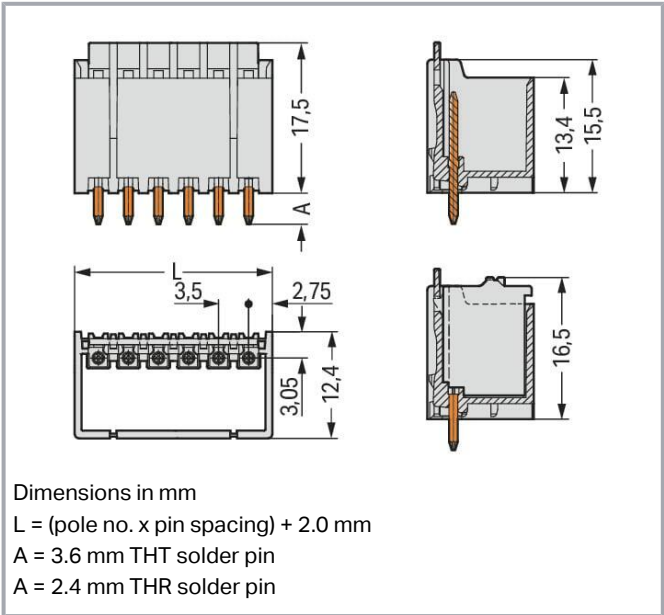

Item description

- Assembly of female connectors without loss of poles, allowing different functions to be divided within one male header (≥ 4 poles)
- Coding pins inserted into the header interface prevent mismating, allowing subsequent coding in panel feedthrough applications
- The female connector is fully shrouded by the male header's housing, providing vibration resistance up to 20 g

Data  
Notes

Safety information

The **picoMAX® Pluggable Connection System** includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected /disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Direct marking  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per IEC/EN

Ratings per

IEC/EN 60664-1

Subject to changes. Please also observe the further product documentation!



|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Nominal voltage (III/3)       | 160 V                                                                |
| Rated impulse voltage (III/3) | 2.5 kV                                                               |
| Rated voltage (III/2)         | 160 V                                                                |
| Rated impulse voltage (III/2) | 2.5 kV                                                               |
| Nominal voltage (II/2)        | 320 V                                                                |
| Rated surge voltage (II/2)    | 2.5 kV                                                               |
| Rated current                 | 10 A                                                                 |
| Legend (ratings)              | (III / 2) $\triangleq$ Overvoltage category III / Pollution degree 2 |

### Ratings per UL

|                                |         |
|--------------------------------|---------|
| Approvals per                  | UL 1059 |
| Rated voltage UL (Use Group B) | 300 V   |
| Rated current UL (Use Group B) | 10 A    |
| Rated voltage UL (Use Group D) | 300 V   |
| Rated current UL (Use Group D) | 10 A    |

### Connection data

|                            |   |
|----------------------------|---|
| Total number of potentials | 2 |
| Number of connection types | 1 |
| Number of levels           | 1 |

### Connection 1

|             |   |
|-------------|---|
| Pole number | 2 |
|-------------|---|

### Physical data

|                                      |                          |
|--------------------------------------|--------------------------|
| Pin spacing                          | 3.5 mm / 0.138 inches    |
| Width                                | 9 mm / 0.354 inches      |
| Height                               | 21.1 mm / 0.831 inches   |
| Height from the surface              | 17.5 mm / 0.689 inches   |
| Depth                                | 12.4 mm / 0.488 inches   |
| Solder pin length                    | 3.6 mm                   |
| Solder pin diameter                  | 1 mm                     |
| Drilled hole diameter with tolerance | 1.2 <sup>(+0.1)</sup> mm |

### Mechanical data

|                 |     |
|-----------------|-----|
| Variable coding | Yes |
|-----------------|-----|

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                          |     |
|--------------------------|-----|
| Anti-rotation protection | Yes |
|--------------------------|-----|

### Plug-in connection

|                                      |                     |
|--------------------------------------|---------------------|
| Contact type (pluggable connector)   | Male connector/plug |
| Connector (connection type)          | for PCB             |
| Mismating protection                 | No                  |
| Plugging without loss of pin spacing | Yes                 |
| Mating direction to the PCB          | 90 °                |
| Locking of plug-in connection        | Locking latch       |

### PCB contact

|             |     |
|-------------|-----|
| PCB contact | THT |
|-------------|-----|

### Material data

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| Note (material data)        | Information on material specifications can be found here |
| Color                       | light gray                                               |
| Material group              | I                                                        |
| Insulation material         | Polyphthalamide (PPA GF)                                 |
| Flammability class per UL94 | V0                                                       |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> )                   |
| Contact plating             | Tin                                                      |
| Fire load                   | 0.024 MJ                                                 |
| Weight                      | 1 g                                                      |

### Environmental requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +100 °C |
| Processing temperature  | -35 ... +60 °C  |

### Commercial data

|               |                         |
|---------------|-------------------------|
| Product Group | 26 (picoMAX Connectors) |
| eCl@ss 10.0   | 27-44-04-02             |
| eCl@ss 9.0    | 27-44-04-02             |
| ETIM 8.0      | EC002637                |
| ETIM 7.0      | EC002637                |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                       |               |
|-----------------------|---------------|
| ECCN                  | NO DATA       |
| PU (SPU)              | 200 pcs       |
| Packaging type        | box           |
| Country of origin     | DE            |
| GTIN                  | 4050821160991 |
| Customs tariff number | 85366930000   |

## Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

## Approvals / Certificates

### General approvals

| Logo                                                                               | Approval                                     | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|----------------------------------------------|--------------------------|------------------|
|                                                                                    | <b>CB</b><br>DEKRA Certification B.V.        | IEC 61984                | NL-49736 /A1     |
|   | <b>CSA</b><br>DEKRA Certification B.V.       | C22.2 No. 158            | 2362521          |
|  | <b>CSA</b><br>DEKRA Certification B.V.       | C22.2                    | 2362521          |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 61984                 | 71-102260 REV.1  |
|  | <b>UL</b><br>Underwriters Laboratories Inc.  | UL 1977                  | E45171           |

## Counterpart

|                                                                                   |                                                                                                                                                                       |                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  | <b>Item no.2091-1122</b><br>1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole; 1,50 mm²; light gray                 | <a href="http://www.wago.com/2091-1122">www.wago.com/2091-1122</a> |
|  | <b>Item no.2091-1102</b><br>1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole; Gripping plate; 1,50 mm²; light gray | <a href="http://www.wago.com/2091-1102">www.wago.com/2091-1102</a> |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.2091-1102/000-5000**

1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole;  
Gripping plate; direct marking; 1,50 mm²; light gray

[www.wago.com/2091-1102/000-5000](http://www.wago.com/2091-1102/000-5000)

**Item no.2091-1102/000-1000**

1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole;  
Gripping plate; direct marking; 1,50 mm²; light gray

[www.wago.com/2091-1102/000-1000](http://www.wago.com/2091-1102/000-1000)

**Item no.2091-1102/002-000**

1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole;  
Gripping plate sliding connector release; 1,50 mm²; light gray

[www.wago.com/2091-1102/002-000](http://www.wago.com/2091-1102/002-000)

**Item no.2091-1102/002-1000**

1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 2-pole;  
Gripping plate sliding connector release; direct marking; 1,50 mm²; light gray

[www.wago.com/2091-1102/002-1000](http://www.wago.com/2091-1102/002-1000)

## Optional accessories

### Coding

Coding

**Item no.: 2091-1610**

Coding key carrier; suitable for 3.5 mm pin spacing; orange

[www.wago.com/2091-1610](http://www.wago.com/2091-1610)

## Downloads

### Documentation

#### Additional Information

|                        |            |        |          |
|------------------------|------------|--------|----------|
| Technical Section      | 2019 年4月3日 | pdf    | Download |
| Technical explanations |            | 2.1 MB |          |

## CAD/CAE-Data

### CAD data

|                        |     |          |
|------------------------|-----|----------|
| 2D/3D Models 2091-1402 | URL | Download |
|------------------------|-----|----------|

### PCB Design

|                                                    |     |          |
|----------------------------------------------------|-----|----------|
| Symbol and Footprint via Ultra Librarian 2091-1402 | URL | Download |
|----------------------------------------------------|-----|----------|

CAX data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

Subject to changes. Please also observe the further product documentation!



- Accel EDA 14 & 15
- Altair
- Altium 6 to current version
- Autodesk Fusion 360
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics
- BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design
- Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000
- Zuken eCADSTAR 2020 and 2021Zuken CR-5000 and CR-8000

#### PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

| Symbol and Footprint via SamacSys 2091-1402                                                                                                                         | URL | Download |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|
| CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment. |     |          |

#### Supported formats:

- 3D (stp)
- Altium
- CADSTAR
- Capture

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



- CircuitStudio
- CR-5000
- CR-8000
- DEHDL
- DesignSpark PCB
- DesignSpark PCB PRO
- DipTrace
- EAGLE
- Easy-PC
- EasyEDA
- eCADSTAR
- KiCad
- OrCAD\_Allegro16
- PADS
- Proteus
- Pulsonix
- Quadcept
- SOLIDWORKS PCB
- TARGET 3001!
- xDX Designer
- Xpedition

PCB Component Libraries (EDA), PCB CAD Library SamacSys Electronic Component Search Engine

CAE data

|                        |     |          |
|------------------------|-----|----------|
| ZUKEN Portal 2091-1402 | URL | Download |
|------------------------|-----|----------|

Asset Administration Shell

|                                      |     |          |
|--------------------------------------|-----|----------|
| Asset Administration Shell 2091-1402 | URL | Download |
|--------------------------------------|-----|----------|

Environmental Product Compliance

Compliance Search

|                                                                                        |     |          |
|----------------------------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 2091-1402                                             | URL | Download |
| THT male header; 1.0 mm Ø solder pin; straight; Pin spacing 3.5 mm; 2-pole; light gray |     |          |


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Installation Notes

### Coding

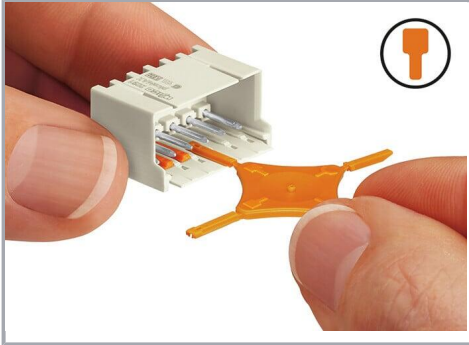

Coding a male header (via coding key carrier and two keys for male header, see symbol).

Subject to changes. Please also observe the further product documentation!